

锰锌氧铁材料规格尺寸 Specification and Dimensions of **MnZn** Ferrtie Material

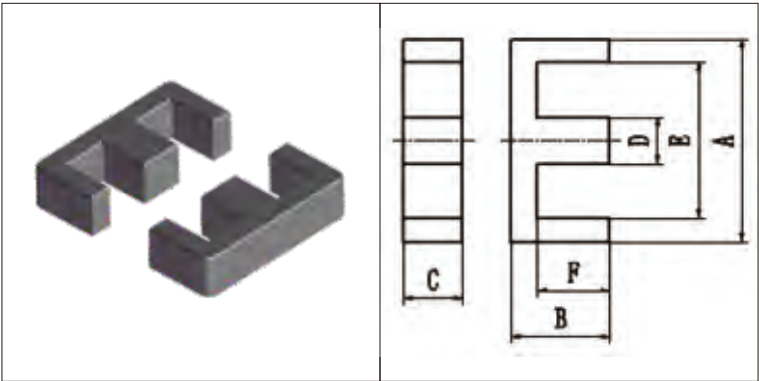


FIG.1

EE 型 / EE Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)					
		A	B	C	D	E	F
EE5/5/2A	1	5.25±0.1	2.65±0.1	1.95±0.1	1.35±0.1	3.8min	2±0.1
EE5.3/5.3/1.6	1	5.25±0.1	2.65±0.075	1.55±0.1	1.35±0.1	3.8min	2±0.075
EE5.8/6.3/2A	1	5.9+0/-0.2	3.2+0/-0.1	2+0.04/-0.1	1.1+0/-0.1	3.85+0.2/-0	2.1+0.15/-0
EE6.25/7/2	1	6.25±0.15	3.65±0.05	2+0/-0.1	1.4+0/-0.1	4.8min	2.9+0.15/-0
EE6.3/6.7/1.2	1	6.3±0.3	3.35±0.1	1.2±0.2	1.75±0.2	4.2min	2.1±0.1
EE6.3/6.7/2.2	1	6.3+0/-0.3	3.35+0/-0.1	2.2+0/-0.1	1.1+0/-0.2	3.9+0.25/-0	2.2+0.2/-0
EE6.3/6/2M	1	6.3+0/-0.25	2.8±0.2	1.9±0.2	1.35±0.15	3.6min	2±0.2
EE8.3/8/2I	1	8.3±0.3	4.2±0.15	2.3±0.15	2+0/-0.3	6.3+0.3/-0.2	3.2±0.15
EE8.3/8/4CQ	1	8.3±0.2	4±0.15	3.6±0.15	2+0/-0.3	6.3±0.2	3±0.1
EE8.3/8/4F	1	8.3±0.2	4.0±0.1	3.9±0.15	2.0+0/-0.3	6.3±0.2	3.0±0.1
EE8.4/10.6/3.9A	1	8.4±0.2	5.3±0.15	3.85±0.15	1.85±0.15	6.2min	4.2±0.15
EE8.5/8.3/2.3	1	8.5±0.3	4.15±0.15	2.3±0.2	1.9±0.2	6.3min	3.15±0.15
EE8.7/8.1/3.9	1	8.7±0.2	4.05±0.1	3.9±0.15	2.15±0.1	6.8+0.3/-0	3.05±0.1
EE9/8/2	1	9±0.25	4±0.1	1.95±0.05	1.9±0.12	5.2±0.13	2.03+0.25/-0
EE9/8.6/2	1	9±0.25	4.3±0.15	1.95±0.1	1.9±0.1	5.2±0.25	2.2±0.15
EE9.3/8.8/2.3	1	9.3±0.15	4.4±0.1	2.3±0.15	2±0.15	6.3±0.15	2.9±0.15
EE9.4/9.6/3.6	1	9.4+0.1/-0.2	4.8±0.2	3.6+0.1/-0.15	1.8±0.1	7.3±0.2	3.65±0.1
EE10/11/5J	1	10.2±0.3	5.5±0.2	4.85±0.15	2.5±0.2	7.5min	4.3±0.2
EE10/11/7	1	10.2±0.3	5.5±0.2	7±0.2	2.5±0.2	7.5min	4.3±0.2

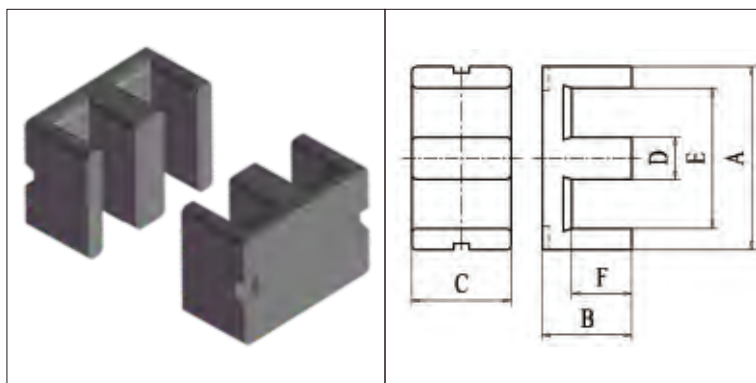


FIG.2

EE 型 / EE Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g /PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
EE5/5/2A	1	4.85	2.60	12.63	32.80	265	295	0.16
EE5.3/5.3/1.6	1	6.1	2.07	12.63	26.1	260	300	0.07
EE5.8/6.3/2A	1	4.85	2.72	13.19	35.9	270	310	0.1
EE6.25/7/2	1	6.78	2.60	17.59	45.70	230	260	0.20
EE6.3/6.7/1.2	1	6.17	2.31	14.27	33.00	210	240	0.18
EE6.3/6.7/2.2	1	4.43	3.0	13.3	39.9	300	340	0.11
EE6.3/6/2M	1	4.01	3.09	12.39	38.30	265	300	0.24
EE8.3/8/2I	1	4.59	4.43	20.34	90.10	350	410	0.40
EE8.3/8/4CQ	1	2.79	7.00	19.51	136.60	555	650	0.82
EE8.3/8/4F	1	2.57	7.58	19.51	147.90	600	710	0.77
EE8.4/10.6/3.9A	1	3.22	7.62	24.50	186.70	530	630	0.94
EE8.5/8.3/2.3	1	4.58	4.44	20.35	90.4	360	450	0.25
EE8.7/8.1/3.9	1	2.64	7.56	19.96	150.9	620	730	0.39
EE9/8/2	1	3.01	5.14	15.47	79.50	350	400	0.54
EE9/8.6/2	1	2.99	5.25	15.70	82.40	340	400	0.60
EE9.3/8.8/2.3	1	3.40	5.73	19.51	111.8	460	550	0.64
EE9.4/9.6/3.6	1	3.22	7.22	23.22	167.6	540	640	0.9
EE10/11/5J	1	2.23	11.81	26.30	310.60	810	980	1.53
EE10/11/7	1	1.54	17.04	26.30	448.20	1200	1450	2.10

*-AL为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of **MnZn** Ferrtie Material

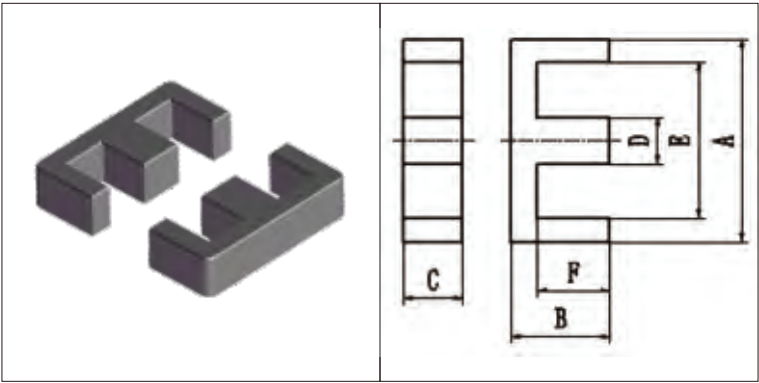


FIG.1

EE 型 / EE Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)					
		A	B	C	D	E	F
EE10.2/8.6/3	1	10.2±0.2	4.3±0.15	3±0.15	3±0.15	7±0.2	2.7±0.15
EE10.5/8.6/3	1	10.5±0.2	4.3±0.15	3±0.15	2.95±0.15	7.35±0.2	2.7±0.15
EE10.6/11.5/5	1	10.6+0.2/-0.15	5.76±0.14	5.05±0.15	2.7±0.1	7.6min	4.4±0.14
EE11/6/8A	1	11±0.3	3±0.15	8±0.2	3±0.2	8min	1.5±0.2
EE11.3/11.3/4.7	1	11.2+0.3/-0.2	5.65±0.15	4.7±0.2	2.4±0.2	8.6min	4.35±0.15
EE11/14/3A	1	11.4±0.3	7.2±0.2	2.8±0.15	2.8±0.1	8.6±0.3	5.7+0.2/-0.1
EE12/12/6.1	1	12±0.25	6.1±0.1	6.1±0.15	4.2±0.15	7.8+0.2/-0.15	4±0.15
EE12.2/22.2/10	1	12.15±0.25	11.1±0.1	10±0.25	4.58±0.15	7.46±0.2	8.81±0.15
EE13/13/6A	1	12.6+0.5/-0.2	6.5+0/-0.4	6+0/-0.5	3.7+0/-0.3	8.9+0.6/-0	4.5+0.3/-0
EE12.5/13/4M	1	12.7±0.4	6.4±0.2	3.6±0.2	3.8+0/-0.3	8.8min	4.5+0.3/-0
EE12.8/24/3C	1	12.8±0.25	12.05±0.15	2.7±0.13	3.65±0.1	8.8±0.25	10.05±0.15
EE12.8/24/3D	1	12.8±0.25	12.05±0.15	3.42±0.13	3.65±0.1	8.8±0.25	10.05±0.15
EE13/13.1/3.8	1	12.95±0.3	6.55±0.1	3.85+0.1/-0.2	3.6±0.15	9.15±0.25	4.5+0.3/-0
EE13/13.4/3.9	1	12.95±0.3	6.7±0.15	3.85±0.15	3.45±0.15	9.3min	4.6±0.15
EE13/12.3/3.1A	1	13±0.3	6.15±0.15	3.1±0.15	3.4±0.2	9.4±0.3	4.35±0.15
EE13/12/6A	1	13.0±0.4	6.05±0.15	5.9±0.3	2.6±0.2	9.8min	4.7±0.2
EE13/12/8A	1	13.0±0.3	6.2±0.2	8.0±0.2	3.0±0.15	9.8min	4.7±0.2
EE13/13/13	1	13.0±0.3	6.6±0.2	13.0±0.2	3.6±0.2	8.5min	4.75±0.2
EE13.1/13/4	1	13.1±0.5	6.4±0.2	3.6±0.2	3.7±0.2	9.2min	4.65±0.3
EE13.2/24.1/2.7	1	13.2±0.25	12.05±0.15	2.7±0.15	3.65±0.1	9.2±0.25	10.05±0.15
EE13.2/24.1/3.4	1	13.2±0.25	12.05±0.15	3.42±0.13	3.65±0.1	9.2±0.25	10.05±0.15

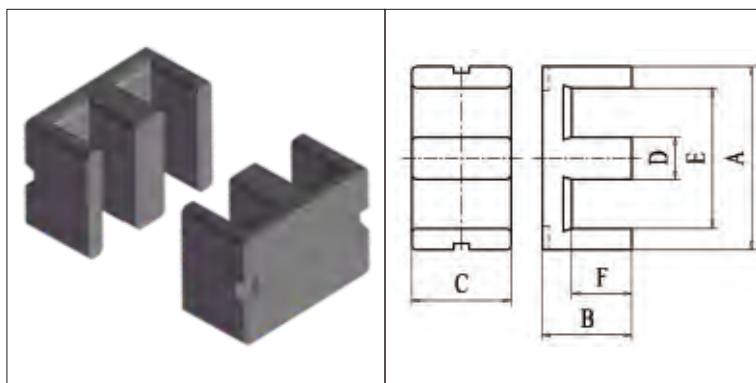


FIG.2

EE 型 / EE Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g /PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
EE10.2/8.6/3	1	2.10	9.38	19.73	185.10	740	870	1.00
EE10.5/8.6/3	1	2.16	9.28	20.09	186.40	720	850	1.00
EE10.6/11.5/5	1	1.93	13.96	26.98	376.60	940	1150	1.80
EE11/6/8A	1	0.68	23.3	15.87	369.8	215	250	0.94
EE11.3/11.3/4.7	1	2.40	11.54	27.75	320.20	770	920	1.60
EE11/14/3A	1	4.21	7.90	33.27	262.80	480	580	1.23
EE12/12/6.1	1	1.00	25.20	27.00	670.00	1750	2100	3.40
EE12.2/22.2/10	1	0.98	46.26	45.35	2098.00	2240	2800	10.40
EE13/13/6A	1	1.48	19.97	29.61	591.20	1250	1500	2.97
EE12.5/13/4M	1	2.32	12.79	29.69	379.80	820	990	1.89
EE12.8/24/3C	1	4.96	10.36	51.40	532.50	440	550	2.25
EE12.8/24/3D	1	3.92	13.13	51.40	674.80	555	700	2.45
EE13/13.1/3.8	1	2.12	14.15	30.02	424.80	885	1100	2.20
EE13/13.4/3.9	1	2.27	13.48	30.65	413.20	860	1040	2.00
EE13/12.3/3.1A	1	2.65	10.93	28.96	316.50	700	850	2.40
EE13/12/6A	1	1.92	15.90	30.61	486.80	980	1150	1.20
EE13/12/8A	1	1.27	24.00	30.51	732.30	1530	1850	4.10
EE13/13/13	1	0.60	49.58	30.04	1489.40	3000	3650	2.52
EE13.1/13/4	1	2.37	12.70	30.10	382.30	790	960	1.95
EE13.2/24.1/2.7	1	5.02	10.32	51.85	535.00	450	550	2.58
EE13.2/24.1/3.4	1	3.94	13.13	51.80	680.10	550	700	3.40

*-AL为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of **MnZn** Ferrtie Material

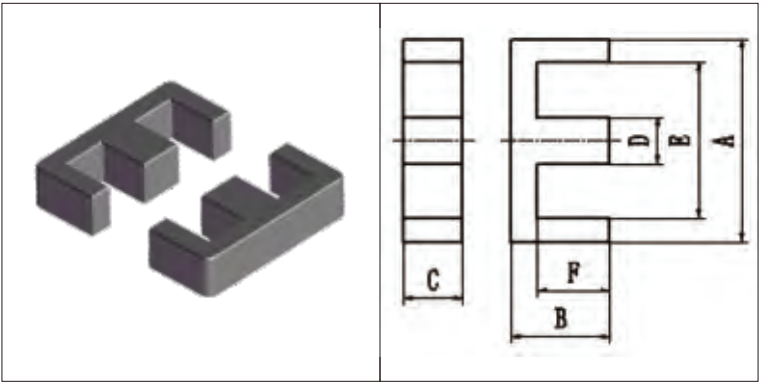


FIG.1

EE 型 / EE Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)					
		A	B	C	D	E	F
EE13.3/14.6/6	1	13.3±0.2	7.3±0.2	6±0.2	2.7±0.2	10min	5.8±0.15
EE13.3/14/10	1	13.3±0.3	7±0.2	9.95±0.15	3.6±0.2	10.2±0.2	5±0.2
EE13.5/13/6B	1	13.5±0.35	6.35±0.15	6±0.2	2.8±0.2	10.6±0.3	4.75±0.15
EE14/7/5CA	1	14.0±0.3	3.5±0.1	5.0±0.15	3±0.3	10.52min	1.9min
EE14/ 7/10B	1	14±0.3	3.5±0.15	10±0.25	3±0.2	11±0.3	2±0.15
EE14/8.2/14A	1	14±0.3	4.1±0.1	14±0.3	3±0.15	11±0.3	2.6±0.15
EE14/17.4/4	1	14±0.3	8.7±0.2	4±0.15	3.6±0.15	10.4±0.3	6.6±0.2
EE14.2/11.8/4.4	1	14.2±0.3	5.9±0.1	4.4±0.1/-0.15	4.4±0.1	9.6min	3.7±0.15
EE14.2/14.7/6	1	14.2±0.2/-0.3	7.35±0.15	6±0.2	2.7±0.2	10.8min	5.85±0.15
EE14.3/11/6.2	1	14.3±0.25	5.5±0.15	6.2±0.15	3±0.15	11min	4.15±0.15
EE15/7/10	1	15±0.3	3.5±0.2	10.2±0.2/-0.4	3.15±0.15	11.7min	2.4±0.15
EE15/38/6A	1	15.1±0.3	19.2±0.2	5.5±0.2	4.0±0.2	10.7±0.3	16.95±0.2
EE15.8/13.8/21.8	2	15.8±0.4	6.9±0.15	21.8±0.4	3.6±0.2	11.4min	4.9±0.15
EE16.1/11.6/4.5	1	16±0.7/-0.5	5.95±0/-0.3	4.7±0/-0.4	4.7±0/-0.3	11.3±0.6/-0	3.45±0.4/-0
EE16.1/15/4.8	1	16±0.5/-0.3	7.5±0.15	4.8±0.2	4±0.2/-0.4	11.8min	5.4±0.15
EE16.1/16.9/8.2	1	16±0.7/-0.5	8.6±0/-0.3	8.4±0/-0.5	4.7±0/-0.3	11.5±0.6/-0	6±0.4/-0
EE16/10/10	1	16.0±0.4	5.0±0.15	10.2±0.2/-0.4	4.15±0.15	11.6min	3.05±0.25
EE16/13/10	1	16±0.3	6.4±0.1	10.2±0.2/-0.3	4.15±0.2	11.7min	4.35±0.2
EE16/14/7	1	16.0±0.3	7.15±0.2	6.8±0.2	3.175±0.175	12.5min	5.5±0.2
EE16/15/5E	1	16±0.4	7.3±0.3	5.1±0/-0.4	4±0.2	11.7min	5.2±0.3/-0
EE16/16/8B	1	16±0.7/-0.5	8.2±0/-0.3	8.4±0/-0.5	4.7±0/-0.3	11.3±0.6/-0	5.7±0.4/-0

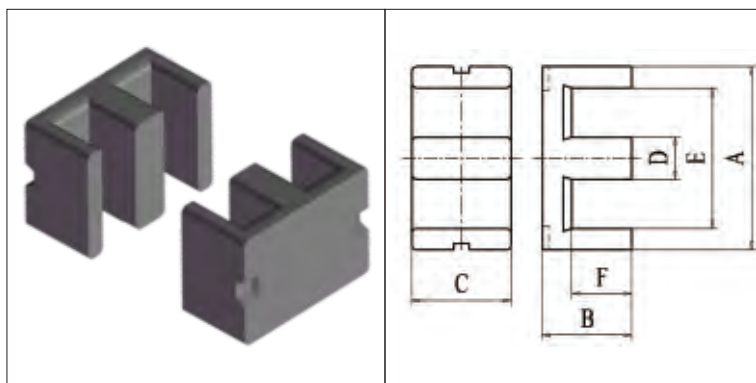


FIG.2

EE 型 / EE Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g /PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
EE13.3/14.6/6	1	2.02	17.45	35.21	614.40	940	1150	3.06
EE13.3/14/10	1	0.93	34.60	32.08	1109.90	1900	2320	5.72
EE13.5/13/6B	1	1.78	17.69	31.47	556.70	1100	1280	2.80
EE14/7/5CA	1	1.35	15.26	20.61	314.50	1210	1450	1.40
EE14/ 7/10B	1	0.70	29.74	20.77	617.7	2300	2750	3.12
EE14/8.2/14A	1	0.55	42.00	23.11	970.7	3300	3800	4.83
EE14/17.4/4	1	2.56	14.9	38.2	569.2	800	1000	1.5
EE14.2/11.8/4.4	1	1.42	19.12	27.17	519.50	1300	1560	2.60
EE14.2/14.7/6	1	2.08	17.46	36.25	633.0	900	1200	1.5
EE14.3/11/6.2	1	1.63	17.94	29.27	525.10	1100	1350	2.80
EE15/7/10	1	0.86	25.58	22.08	564.90	1750	2050	3.30
EE15/38/6A	1	3.50	23.20	81.14	1882.40	680	870	9.30
EE15.8/13.8/21.8	2	0.40	83.92	33.85	2840.60	4680	5700	14.00
EE16.1/11.6/4.5	1	1.43	19.97	28.57	570.50	1290	1560	2.91
EE16.1/15/4.8	1	1.89	19.14	36.23	693.40	1080	1300	3.40
EE16.1/16.9/8.2	1	1.08	36.19	39.04	1412.70	1900	2400	7.80
EE16/10/10	1	0.65	40.38	26.30	1062.00	2800	3300	5.46
EE16/13/10	1	0.76	41.43	31.66	1311.80	2550	3100	6.70
EE16/14/7	1	1.67	21.92	36.71	804.70	1220	1500	4.10
EE16/15/5E	1	1.87	19.08	35.66	680.40	1100	1350	3.42
EE16/16/8B	1	1.03	36.33	37.56	1364.70	1950	2400	6.86

*-AL为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of **MnZn** Ferrtie Material

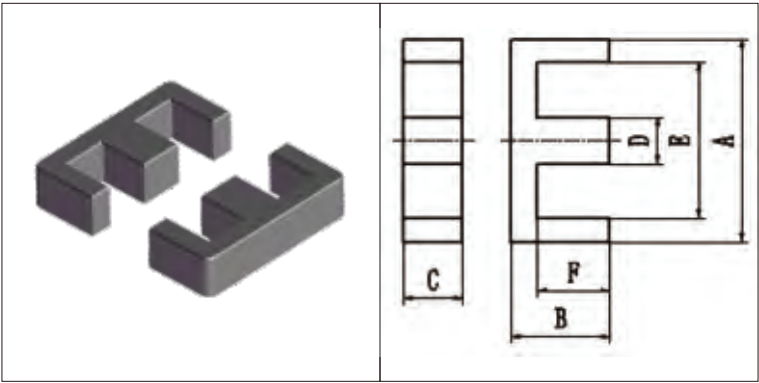


FIG.1

EE 型 / EE Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)					
		A	B	C	D	E	F
EE16.7/14.6/4.7	1	16.7±0.3	7.3±0.3	4.7±0.2	3.9±0.2	12.4min	5.2+0.3/-0
EE16.7/15/5	1	16.7±0.3	7.3±0.3	5.1+0/-0.4	4.0±0.2	12.4min	5.2+0.3/-0
EE16.1/12.7/7.2A	1	16.1±0.3	6.35+0.2/-0.1	7.2±0.2	4.55±0.2	11.4min	3.85+0.2/-0.1
EE16.1/14.4/4.7	1	16.1±0.3	7.2±0.15	4.9+0/-0.4	4±0.2	11.7min	5.2+0.3/-0
EE16.1/21.5/4.2	1	16.1±0.25	10.6+0.3/-0	4.2±0.2	4.4+0/-0.3	11.6min	8.1+0.3/-0
EE16/12/5D	1	16.1±0.6	6.1+0/-0.3	4.7+0/-0.4	4.7+0/-0.3	11.45min	3.8±0.2
EE16/12/7A	1	16.1±0.3	6.0±0.2	7.2±0.2	4.55±0.15	11.3min	3.85±0.15
EE16/16/5D	1	16.1±0.6	8.05±0.15	4.5±0.2	4.55±0.15	11.3min	5.9±0.2
EE16/21/4	1	16.1±0.25	10.5+0.4/-0	4.2±0.2	4.4+0/-0.3	11.6min	8.0+0.4/-0
EE16.1/13.6/4.8	1	16.1±0.3	6.8±0.2	4.8±0.2	4±0.2	11.8min	4.7±0.2
EE16.2/16.1/12.	1	16.2±0.35	8.05±0.2	12.85±0.2	4.55±0.2	11.6min	6.05±0.2
EE16.2/13.6/2.	1	16.2±0.2	6.8±0.2	2.55±0.15	5.2±0.15	11±0.15	4.2±0.15
EE16.3/16.1/4.5A	1	16.3±0.3	8.2+0/-0.3	4.65+0/-0.4	4.65+0/-0.3	11.8min	5.9+0.3/-0.1
EE16.4/18.5/4.5	1	16.35±0.4	9.25±0.2	4.5±0.2	4.5±0.2	11.4min	7.05±0.2
EE16.4/16.7/7.1	1	16.4±0.3	8.35+0.1/-0.15	7.15+0.15/-0.2	4.55+0.15/-0.2	12.1±0.3	6.15+0.15/-0.1
EE16.4/10.1/8A	1	16.4+0.25/-0.3	5.05±0.15	8±0.2	4.5±0.15	12min	3.05±0.15
EE16.5/7.7/16.5	1	16.5±0.25	3.85±0.05	16.5±0.25	3±0.1	13.1±0.2	2.35±0.1
EE16.5/12.2/7.1	1	16.5±0.3	6.1±0.1	7.1±0.15	4.6±0.1	11.5±0.2	3.75±0.1
EE16.5/13/10.3	1	16.5±0.35	6.55±0.1	10.25±0.3	4.6±0.12	11.7+0.35/-0.25	4.2±0.15
EE16.6/7.8/5.2A	1	16.6±0.3	3.9±0.1	5.15±0.2	3.7±0.2	12.5±0.3	1.4±0.15
EE16.6/9.4/10.1	1	16.6±0.2	4.7±0.15	10.1±0.2	4.1±0.1	12.3min	2.7±0.15

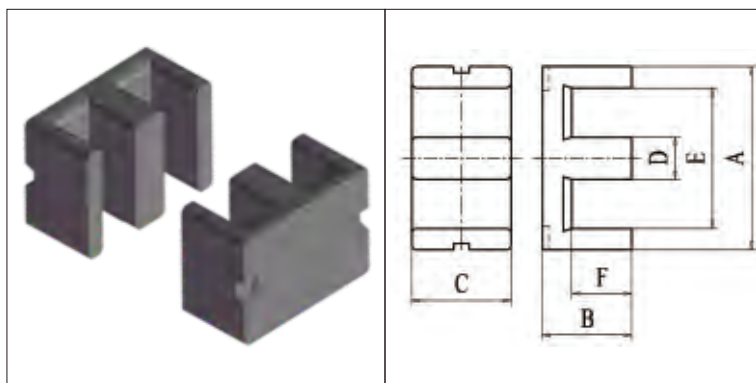


FIG.2

EE 型 / EE Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g /PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
EE16.7/14.6/4.7	1	1.87	19.44	36.3	705.7	1100	1350	1.69
EE16.7/15/5	1	1.87	19.44	36.30	705.70	1100	1350	3.54
EE16.1/12.7/7.2A	1	0.91	33.31	30.15	1004.40	2050	2500	4.33
EE16.1/14.4/4.7	1	1.92	18.47	35.43	654.40	1000	1250	3.30
EE16.1/21.5/4.2	1	2.58	18.45	47.70	880.00	850	1050	4.39
EE16/12/5D	1	1.52	19.28	29.39	566.80	1200	1450	2.92
EE16/12/7A	1	0.92	31.97	29.37	938.90	2050	2460	4.70
EE16/16/5D	1	1.89	19.95	37.61	750.30	1070	1320	3.78
EE16/21/4	1	2.64	17.80	47.04	837.20	850	1050	4.40
EE16.1/13.6/4.8	1	1.71	19.51	33.33	650.20	1170	1430	3.20
EE16.2/16.1/12.	1	0.69	54.86	38.11	2090.90	2830	3500	10.20
EE16.2/13.6/2.	1	2.32	13.26	30.77	408.00	840	1020	2.10
EE16.3/16.1/4.5A	1	2.01	18.99	38.19	725.20	1000	1250	3.65
EE16.4/18.5/4.5	1	3.10	20.21	42.50	859.00	1000	1250	4.31
EE16.4/16.7/7.1	1	1.22	31.75	38.93	1236.20	1670	2050	9.50
EE16.4/10.1/8A	1	0.80	33.27	26.47	880.50	2230	2680	4.50
EE16.5/7.7/16.5	1	0.48	50.9	24.3	1236.9	3700	4400	3.3
EE16.5/12.2/7.1	1	0.87	33.76	29.33	990.20	2140	2580	5.10
EE16.5/13/10.3	1	0.65	47.99	31.31	1502.50	2960	3590	7.52
EE16.6/7.8/5.2A	1	0.93	22.82	21.14	482.4	1850	2100	1.3
EE16.6/9.4/10.1	1	0.62	40.94	25.56	1046.40	2880	3440	5.32

*-AL为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of **MnZn** Ferrtie Material

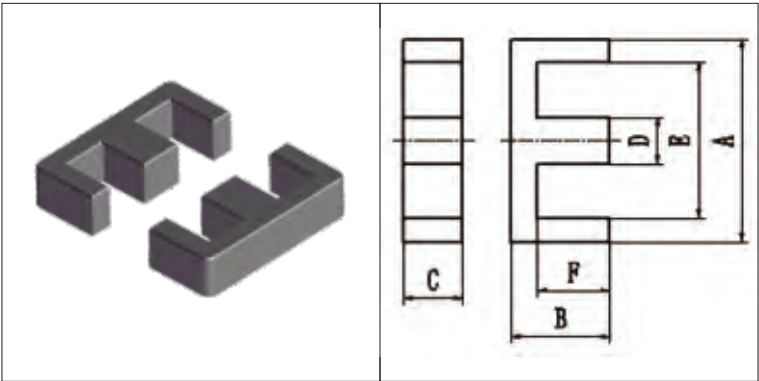


FIG.1

EE 型 / EE Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)					
		A	B	C	D	E	F
EE16/25/5A	1	16.0±0.4	12.4±0.3	5.1+0/-0.4	4.0±0.2	11.7min	10.4±0.3
EE16/9/10E	1	16.0±0.3	4.6±0.1	10.2+0.2/-0.3	4.15±0.2	11.7min	2.65±0.2
EE16.7/15/14.8	1	16.7±0.3	7.5±0.15	14.8±0.3	4.3±0.2	12.2min	5.4±0.15
EE16.7/16.1/4.6	1	16.7±0.3	8.05±0.15	4.6±0.15	4.6±0.15	12.2min	6+0.25/-0.15
EE16.7/16.6/4.5	1	16.7±0.3	8.3±0.2	4.5+0.1/-0.2	4.5+0.1/-0.2	11.8min	6±0.2
EE16.8/16.2/8.4	1	16.8±0.4	8.1±0.15	8.4±0.2	4.55±0.15	12.3±0.3	5.9±0.15
EE16.9/17.2/7.4	1	16.9±0.3	8.6±0.1	7.35±0.2	4.75±0.15	11.55±0.3	5.85±0.15
EE17/14.5/7B	1	17±0.3	7.25±0.15	7±0.2	5±0.15	13±0.3	5.3±0.15
EE17/16.8/4.6	1	17±0.3	8.4±0.2	4.7+0/-0.4	5.7+0/-0.3	11+0.6/-0	5.6±0.2
EE17.2/25/5	1	17.2±0.30	12.5±0.3	4.85±0.2	4.0±0.15	12.8min	10.3±0.3
EE17.3/12/8.15	1	17.3±0.3	6±0.2	8.15±0.2	4.8±0.2	12.35±0.3	3.6±0.2
EE17.5/11.4/8.2	1	17.5±0.3	5.7±0.15	8.2±0.2	4.6±0.15	12.4min	3.4±0.15
EE17.5/15/4.9	1	17.5±0.3	7.5±0.2	4.9±0.2	4.7±0.15	12.7min	5.3±0.15
EE18/53/6	1	18±0.5	26.7±0.2	6.0±0.2	5.5±0.15	12.2±0.25	23.35±0.15
EE18/8/10	1	18.0±0.4	4.0±0.1	10.0±0.2	4.0±0.1	13.7min	1.8min
EE18.6/16.2/3.5A	1	18.6±0.3	8.1±0.2	3.55+0.15/-0.25	6+0.15/-0.2	13.1±0.3	5.8±0.15
EE18.7/18.1/4.5	1	18.7±0.35	9.05±0.2	4.5±0.2	4.55±0.15	14.2±0.35	6.9±0.2
EE18/9/8A	1	18±0.4	4.2±0.1	7.9±0.2	4±0.2	14±0.4	2.2±0.2
EE18/15.6/6	1	18±0.4	7.8±0.15	6±0.2	5.5±0.15	12.2±0.3	4.45±0.15
EE18/6.8/10	2	18±0.35	3.4±0.1	10.0±0.2	4.0±0.1	14±0.3	1.4±0.1
EE18.4/15.6/6	1	18.4±0.4	7.8±0.15	6±0.2	5.5±0.15	12.7min	4.45±0.15

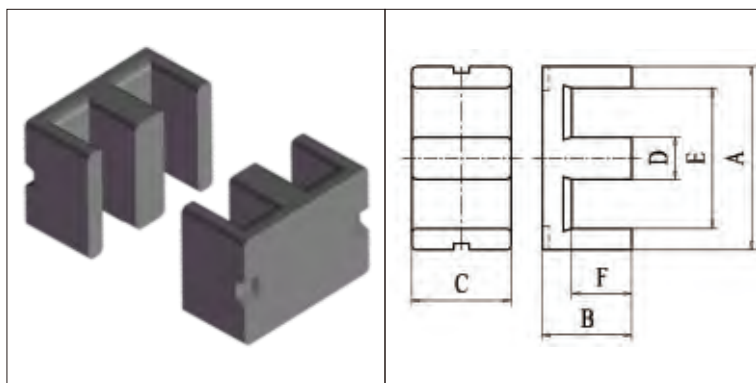


FIG.2

EE 型 / EE Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g /PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
EE16/25/5A	1	2.88	19.40	55.94	1085.20	800	1000	5.27
EE16/9/10E	1	0.59	41.46	24.47	1014.40	2970	3500	5.20
EE16.7/15/14.8	1	0.58	62.65	36.43	2282.30	3520	4330	3.50
EE16.7/16.1/4.6	1	1.87	20.89	39.14	817.7	1100	1400	1.96
EE16.7/16.6/4.5	1	1.89	20.50	38.80	795.40	1110	1370	4.00
EE16.8/16.2/8.4	1	1.02	37.69	38.35	1445.60	2020	2500	7.20
EE16.9/17.2/7.4	1	1.01	37.80	38.35	1449.60	1910	2400	7.70
EE17/14.5/7B	1	1.19	29.82	35.34	1054.00	1620	2000	5.40
EE17/16.8/4.6	1	1.46	25.28	36.96	934.40	1420	1750	4.90
EE17.2/25/5	1	2.85	19.97	56.88	1135.80	90	1010	5.80
EE17.3/12/8.15	1	0.74	39.25	29.05	1140.20	2580	3120	6.00
EE17.5/11.4/8.2	1	0.76	38.18	28.96	1105.50	2490	3000	5.60
EE17.5/15/4.9	1	1.65	22.2	36.55	811.3	1200	1300	2.0
EE18/53/6	1	3.19	34.38	109.52	3765.30	790	1050	17.30
EE18/8/10	1	0.59	40.82	24.08	983.10	2900	3420	5.00
EE18.6/16.2/3.5A	1	2.03	18.75	38.01	712.7	1200	1480	1.85
EE18.7/18.1/4.5	1	2.21	20	44.2	884.0	990	1200	2.26
EE18/9/8A	1	0.79	31.60	25.08	792.60	2270	2720	4.08
EE18/15.6/6	1	0.95	35.68	34.04	1214.40	1960	2390	6.00
EE18/6.8/10	2	0.55	40.00	21.88	875.30	3120	3690	4.40
EE18.4/15.6/6	1	1.00	34.63	34.65	1199.80	1860	2280	6.30

*-AL为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of **MnZn** Ferrtie Material

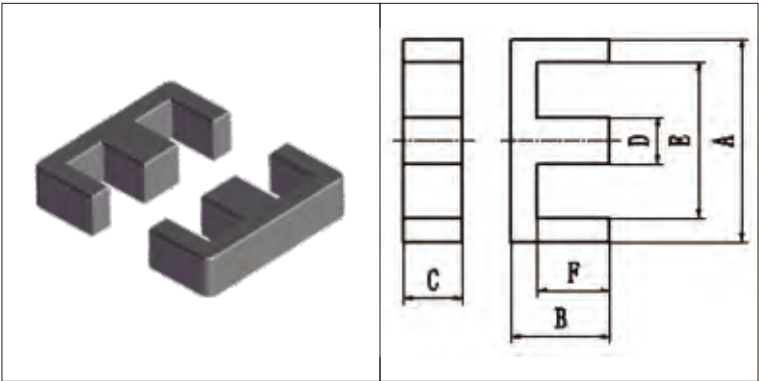


FIG.1

EE 型 / EE Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)					
		A	B	C	D	E	F
EE18.5/19/4.5	1	18.4±0.4	9.5±0.2	4.5±0.2	5.5±0.2	12.7min	6.3±0.2
EE19/16/5A	1	19±0.4	8±0.3	5+0.1/-0.5	5+0/-0.5	13.8min	5.6+0.4/-0.1
EE19/16/10	1	19.05±0.4	8.1±0.25	9.5±0.2	4.75±0.25	14.2min	5.69±0.2
EE19.1/16.1/7.6B	1	19.1±0.3	8.025±0.15	7.6±0.25	5+0/-0.5	14.5±0.3	5.725±0.15/-0.1
EE19/16.6/6.5A	1	19±0.4	8.3±0.2	6.5±0.2	4.75±0.25	14.2min	5.89±0.2
EE19.1/20.3/5A	1	19.1±0.4	10.15±0.15	5±0.2	4.55±0.2	14.5±0.4	7.8±0.15
EE19.1/16/9.6	1	19.1±0.3	8±0.15	9.7+0.05/-0.35	4.8±0.15	14.5±0.3	5.7±0.15
EE19/27/5A	1	19.2±0.4	13.6±0.3	5.1+0/-0.5	5.1+0/-0.5	14min	11.3±0.3
EE19.5/10/6.5	1	19.5±0.3	5.2+0.15/-0	6.5±0.25	4.75±0.2	15±0.3	3.08±0.2
EE19/26/5A	1	19.5±0.3	13.3±0.3	5.0+0.2/-0.3	5.1+0/-0.5	14.3min	10.9±0.2
EE19.9/16.2/6.4	1	19.9±0.3	8.1±0.2	6.5+0/-0.3	4.7+0.1/-0.2	15.2min	5.8±0.2
EE20.1/18.5/5.7	1	20+0.8/-0.6	9.45+0/-0.4	5.9+0/-0.5	5.9+0/-0.4	14.1min	6.25+0.4/-0
EE20/18/11N	1	20.0+0.8/-0.7	9.3+0/-0.8	11.0+0/-0.5	5.9+0/-0.4	14.1min	6.1+0.4/-0
EE20/18/6J	1	20.0+0.8/-0.6	9.3+0/-0.4	5.9+0/-0.5	5.9+0/-0.4	14.1+0.6/-0	6.1+0.4/-0
EE20/19.2/12A	1	20+0.4/-0.2	9.6±0.2	12±0.2	5.8±0.2	13.6min	6.7±0.2
EE20/20/11M	1	20.0+0.8/-0.6	10.2+0/-0.4	11+0/-0.5	5.9+0/-0.4	14.1+0.6/-0	7.0+0.4/-0
EE20/20/6E	1	20.0±0.6	9.9±0.2	5.65±0.25	5.7±0.2	14.1min	7.2±0.2
EE20/20/9D	1	20.0±0.6	9.9±0.2	8.8±0.25	5.7±0.2	14.1min	7.2±0.2
EE20/25.9/5	1	20±0.3	12.95±0.25	5±0.2	4.55±0.2	14.3min	10.4±0.15
EE20/27/4A	1	20±0.25	13.7±0.25	4.1±0.1	4.55±0.1	14.7±0.25	11.15±0.15
EE20/27/5	1	20.0±0.3	13.7±0.2	4.85±0.25	4.95±0.15	15.1min	11.3±0.2

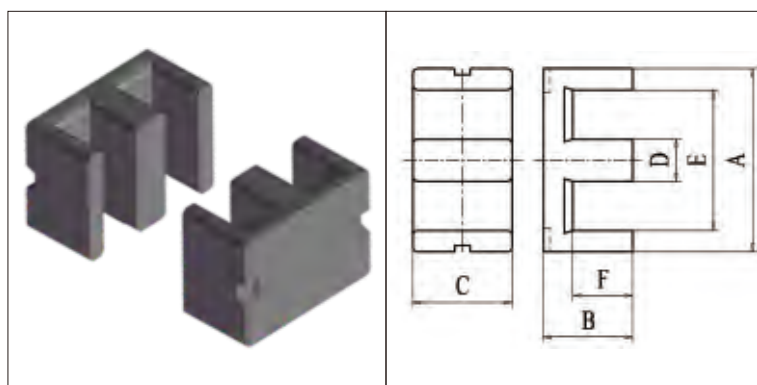


FIG.2

EE 型 / EE Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g /PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
EE18.5/19/4.5	1	1.65	25.38	41.88	1063.00	1230	1550	5.50
EE19/16/5A	1	1.77	22.46	39.71	891.90	1160	1430	4.40
EE19/16/10	1	0.90	44.32	39.97	1771.30	2250	2800	8.92
EE19.1/16.1/7.6B	1	1.13	35.42	39.91	1413.56	1850	2270	6.50
EE19/16.6/6.5A	1	1.35	30.18	40.73	1229.20	1500	1850	6.40
EE19.1/20.3/5A	1	2.10	23.04	48.43	1115.80	1060	1320	5.40
EE19.1/16/9.6	1	0.89	44.53	39.79	1771.80	2340	2900	8.20
EE19/27/5A	1	2.68	23.15	62.13	1438.30	860	1100	7.09
EE19.5/10/6.5	1	1.01	29.34	29.62	868.90	1860	2300	4.50
EE19/26/5A	1	2.53	24.05	60.95	1465.70	920	1180	7.60
EE19.9/16.2/6.4	1	1.43	28.87	41.20	1189.30	1450	1800	5.90
EE20.1/18.5/5.7	1	1.37	31.63	43.49	1375.50	1560	1940	6.92
EE20/18/11N	1	0.74	57.35	42.67	2446.80	2800	3500	13.00
EE20/18/6J	1	1.34	32.03	42.77	1370.00	1600	2000	7.15
EE20/19.2/12A	1	0.62	70.81	44.21	3130.20	3450	4300	15.50
EE20/20/11M	1	0.76	60.96	46.37	2826.90	2850	3600	12.60
EE20/20/6E	1	1.50	30.86	46.32	1429.40	1450	1800	7.40
EE20/20/9D	1	0.96	48.06	46.32	2226.00	2220	2800	11.80
EE20/25.9/5	1	2.39	24.75	59.23	1466.00	900	1150	7.35
EE20/27/4A	1	3.09	20.17	62.34	1257.30	710	900	6.05
EE20/27/5	1	2.65	23.75	62.98	1495.80	880	1130	7.60

*-AL为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of **MnZn** Ferrtie Material

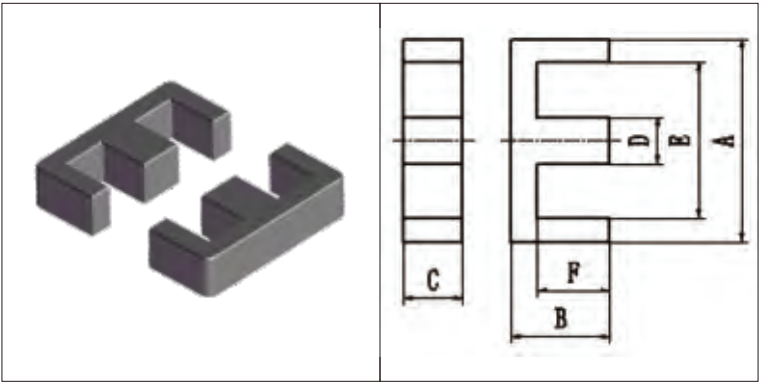


FIG.1

EE 型 / EE Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)					
		A	B	C	D	E	F
EE20/33/6A	1	20±0.3	16.65±0.25	6±0.25	4.55±0.2	14.7±0.3	14±0.15
EE20/15/16A	1	20.15±0.35	7.5±0.2	16±0.25	5.7±0.2	14.1min	4.5+0.2/-0.1
EE20.3/13/15A	1	20.3+0.8/-0.4	6.25+0.25/-0	15+0/-0.4	5+0/-0.3	15.4+0.6/-0	3.95±0.15
EE20.4/19.8/5.7	1	20.4+0/-0.8	9.9±0.2	5.7+0.15/-0.2	5.7+0.15/-0.2	14.4+0.4/-0.2	7.2+0.2/-0
EE20/19.8/5.7	1	20.4+0/-0.8	9.9±0.2	5.65±0.25	5.7±0.2	14.2min	7.2±0.2
EE20/20.4/11A	1	20.4+0.45/-0.1	10.4+0/-0.4	10.75±0.2	5.9+0/-0.4	14.6+0.6/-0	7.4±0.2
EE20.5/12.8/14.8	1	20.5±0.6	6.25+0.25/-0	15+0/-0.4	5+0/-0.3	15.7±0.3	3.95±0.15
EE20.5/19/5	1	20.5±0.3	9.5±0.3	5±0.2	4±0.2	16.5±0.3	7.5±0.2
EE20.5/19.8/5.7	1	20.5±0.25	9.9±0.2	5.65±0.25	5.7±0.2	15±0.25	7.2±0.2
EE20.5/21.6/7	1	20.5+0.4/-0.5	10.8±0.2	7±0.3	5±0.3	14.7min	7.1+0.2/-0.15
EE20/21/7B	1	20.5±0.5	10.7±0.3	7.0±0.3	5.0±0.3	14.7min	7.0±0.3
EE21/28/6	1	20.5±0.4	13.9±0.2	6.35±0.15	6.35±0.15	14.35±0.25	10.7±0.2
EE20.9/20.9/7.7	1	20.9±0.4	10.45±0.15	7.65±0.25	7.6±0.2	13.35±0.35	6.65±0.15
EE21/20/6A	1	21±0.5	9.9±0.2	5.65±0.3	5.7±0.2	15.1min	7.2±0.2
EE20/20/11M	1	20.0+0.8/-0.6	10.2+0/-0.4	11+0/-0.5	5.9+0/-0.4	14.1+0.6/-0	7.0+0.4/-0
EE20/20/6E	1	20.0±0.6	9.9±0.2	5.65±0.25	5.7±0.2	14.1min	7.2±0.2
EE20/20/9D	1	20.0±0.6	9.9±0.2	8.8±0.25	5.7±0.2	14.1min	7.2±0.2
EE20/25.9/5	1	20±0.3	12.95±0.25	5±0.2	4.55±0.2	14.3min	10.4±0.15
EE20/27/4A	1	20±0.25	13.7±0.25	4.1±0.1	4.55±0.1	14.7±0.25	11.15±0.15
EE20/27/5	1	20.0±0.3	13.7±0.2	4.85±0.25	4.95±0.15	15.1min	11.3±0.2
EE20/28/5R	1	20±0.3	13.95±0.25	5±0.2	4.55±0.2	14.3min	11.4±0.15

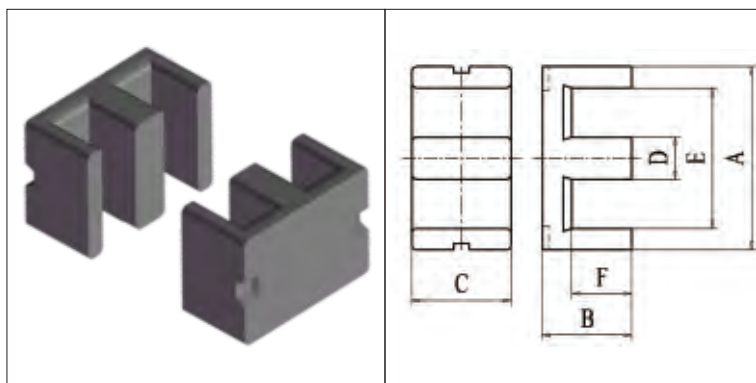


FIG.2

EE 型 / EE Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g /PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
EE20/33/6A	1	2.49	29.66	73.78	2188.30	1170	1170	10.62
EE20/15/16A	1	0.39	92.34	36.05	3329.20	6400	6400	17.00
EE20.3/13/15A	1	0.48	71.56	34.25	2450.70	5150	5150	6.15
EE20.4/19.8/5.7	1	1.51	30.85	46.47	1433.60	1750	1750	7.30
EE20/19.8/5.7	1	1.49	31.08	46.27	1438.20	1820	1820	7.42
EE20/20.4/11A	1	0.77	60.86	47.13	2868.30	3590	3590	14.70
EE20.5/12.8/14.8	1	0.48	71.56	34.25	2450.70	5140	5140	12.44
EE20.5/19/5	1	2.44	20.0	48.78	975.7	1150	1150	2.45
EE20.5/19.8/5.7	1	1.49	31.29	46.72	1461.90	1810	1810	7.33
EE20.5/21.6/7	1	1.21	39.19	47.60	1865.40	2050	2050	9.91
EE20/21/7B	1	1.20	39.29	47.09	1850.20	2070	2070	9.70
EE21/28/6	1	1.52	39.87	60.72	2420.90	1930	1930	11.96
EE20.9/20.9/7.7	1	0.76	58.00	44.27	2567.50	3570	3570	13.20
EE21/20/6A	1	1.52	31.07	47.27	1468.70	1800	1800	7.29
EE20/20/11M	1	0.76	60.96	46.37	2826.90	3600	3600	12.60
EE20/20/6E	1	1.50	30.86	46.32	1429.40	1800	1800	7.40
EE20/20/9D	1	0.96	48.06	46.32	2226.00	2800	2800	11.80
EE20/25.9/5	1	2.39	24.75	59.23	1466.00	1150	1150	7.35
EE20/27/4A	1	3.09	20.17	62.34	1257.30	900	900	6.05
EE20/27/5	1	2.65	23.75	62.98	1495.80	1130	1130	7.60
EE20/28/5R	1	2.55	24.74	63.20	1563.70	1090	1090	8.10

*-Al为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of **MnZn** Ferrtie Material

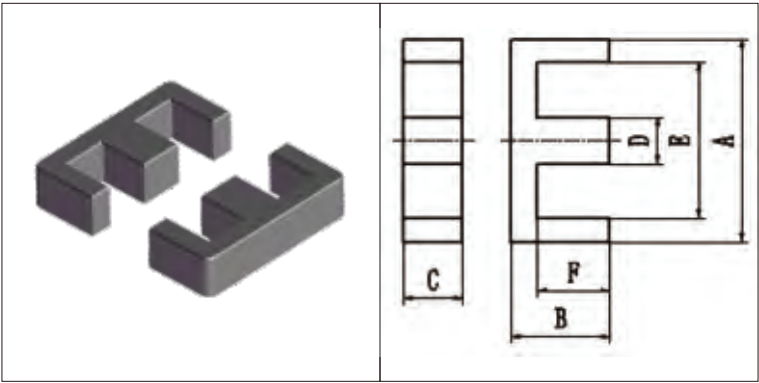


FIG.1

EE 型 / EE Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)					
		A	B	C	D	E	F
EE20/31/5	1	20.0±0.25	15.45±0.25	5+0.05/-0.2	4.55±0.1	14.7±0.2	12.9±0.15
EE20/33/6A	1	20±0.3	16.65±0.25	6±0.25	4.55±0.2	14.7±0.3	14±0.15
EE20/15/16A	1	20.15±0.35	7.4±0.15	16±0.25	5.7±0.2	14.1min	4.5+0.2/-0.1
EE20.3/13/15A	1	20.3+0.8/-0.4	6.25+0.25/-0	15+0/-0.4	5+0/-0.3	15.4+0.6/-0	3.95±0.15
EE20/19.8/5.7	1	20.4+0/-0.8	9.9±0.2	5.65±0.25	5.7±0.2	14.2min	7.2±0.2
EE20/20.4/11A	1	20.4+0.45/-0.1	10.4+0/-0.4	10.75±0.2	5.9+0/-0.4	14.6+0.6/-0	7.4±0.2
EE20.5/12.8/14.8	1	20.5±0.6	6.4±0.15	15+0/-0.4	5+0/-0.3	15.7±0.3	4.0±0.15
EE20.5/19.8/5.7	1	20.5±0.25	9.9±0.2	5.65±0.25	5.7±0.2	15±0.25	7.2±0.2
EE20.5/21.6/7	1	20.5+0.4/-0.5	10.8±0.2	7±0.3	5±0.3	14.7min	7.1+0.2/-0.15
EE20/21/7B	1	20.5±0.5	10.7±0.3	7.0±0.3	5.0±0.3	14.7min	7.0±0.3
EE21/28/6	1	20.5±0.4	13.9±0.2	6.35±0.15	6.35±0.15	14.35±0.25	10.7±0.2
EE20.9/20.9/7.7	1	20.9±0.4	10.45±0.15	7.65±0.25	7.6±0.2	13.35±0.35	6.65±0.15
EE21/20/6A	1	21±0.5	9.9±0.2	5.65±0.3	5.7±0.2	15.1min	7.2±0.2
EE22.3/30.5/5.7	1	22.25±0.3	15.26±0.3	5.7±0.3	5.7±0.3	15.5min	11.2±0.3
EE22.5/17.3/13	1	22.5±0.5	8.63±0.3	13±0.3	6.3±0.3	15.8min	5.55±0.3
EE23/16.8/3.3	1	23±0.4	8.4±0.15	3.3±0.2	5.5±0.2	16.5±0.4	5.55±0.15
EE25/13/25	1	25±0.4	6.5±0.2	25±0.4	8±0.2	17±0.35	2.35±0.2
EE25/19/7	1	25.3±0.4	9.6±0.2	7.0±0.2	6.5±0.25	18.5min	6.6±0.2
EE25/31.7/6.3	1	25.3±0.4	15.85±0.3	6.3±0.25	6.2±0.3	18.8min	12.7+0.3/-0.1
EE25.1/14/14A	1	25.05±0.75	6.95±0.15	14±0.3	7.25±0.25	17.5min	3.95±0.15
EE25.4/25.6/7.2C	1	25.4±0.4	12.8±0.2	7.2+0.2/-0.3	7.25±0.2	18.5+0.8/-0	9.2±0.2

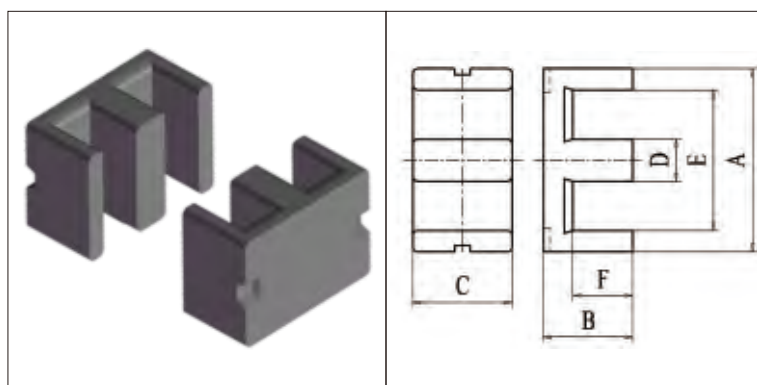


FIG.2

EE 型 / EE Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g /PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
EE20/31/5	1	2.86	24.21	69.29	1677.60	790	1000	8.70
EE20/33/6A	1	2.49	29.66	73.78	2188.30	910	1170	10.62
EE20/15/16A	1	0.39	92.34	36.05	3329.20	5200	6400	17.00
EE20.3/13/15A	1	0.48	71.56	34.25	2450.70	4200	5150	6.15
EE20/19.8/5.7	1	1.49	31.08	46.27	1438.20	1460	1820	7.42
EE20/20.4/11A	1	0.77	60.86	47.13	2868.30	2870	3590	14.70
EE20.5/12.8/14.8	1	0.48	71.56	34.25	2450.70	4200	5140	12.44
EE20.5/19.8/5.7	1	1.49	31.29	46.72	1461.90	1450	1810	7.33
EE20.5/21.6/7	1	1.21	39.19	47.60	1865.40	1650	2050	9.91
EE20/21/7B	1	1.20	39.29	47.09	1850.20	1650	2070	9.70
EE21/28/6	1	1.52	39.87	60.72	2420.90	1500	1930	11.96
EE20.9/20.9/7.7	1	0.76	58.00	44.27	2567.50	2860	3570	13.20
EE21/20/6A	1	1.52	31.07	47.27	1468.70	1450	1800	7.29
EE22.3/30.5/5.7	1	1.98	34.49	68.28	2355.0	1220	1550	6.3
EE22.5/17.3/13	1	0.52	80.82	41.94	3389.8	4100	5100	8.8
EE23/16.8/3.3	1	2.19	19.27	42.21	813.4	900	1200	2.2
EE25/13/25	1	0.15	203.63	31.20	6352.8	12500	15000	33.80
EE25/19/7	1	1.10	43.94	48.53	2132.50	1940	2430	10.60
EE25/31.7/6.3	1	1.91	38.66	73.82	2853.8	1280	1650	7.2
EE25.1/14/14A	1	0.40	91.22	36.85	3361.5	5400	5900	7.80
EE25.4/25.6/7.2C	1	1.20	49.6	59.4	2946.2	1950	2500	7.6

*-AL为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of **MnZn** Ferrtie Material

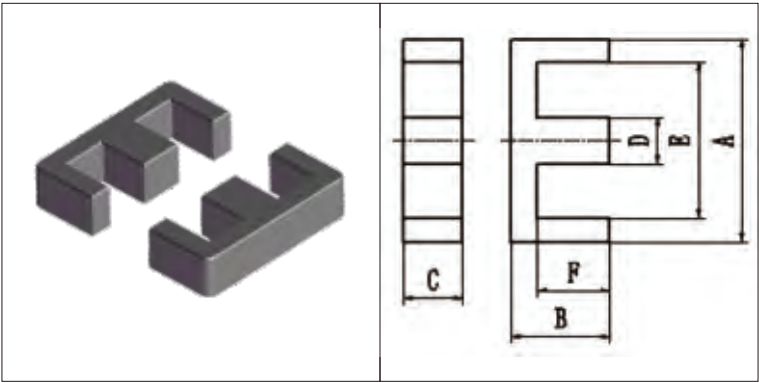


FIG.1

EE 型 / EE Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)					
		A	B	C	D	E	F
EE25/18/11B	1	25.0+0.8/-0.7	9.3+0/-0.5	11.0+0/-0.6	7.5+0/-0.5	17.5+0.8/-0	5.2+0.5/-0
EE25/19/6H	1	25.4±0.5	9.5±0.3	6.4±0.3	6.4±0.3	18.6min	6.5±0.3
EE25/19/7B	1	25.4±0.6	9.6+0.3/-0.1	6.75±0.25	6.35±0.25	18.4min	6.5+0.3/-0.1
EE25/20/6AG	1	25.4±0.5	10±0.3	6.4±0.3	6.4±0.3	18.6min	6.8±0.3
EE25/20/7M	1	25.4±0.6	9.8+0.2/-0.1	6.75±0.2	6.35±0.25	18.4min	6.7+0.3/-0.1
EE25/29/6	1	25.4±0.5	14.7±0.3	6.35±0.25	6.35±0.25	18.8min	11.5±0.3
EE25/32/6A	1	25.4±0.5	15.8±0.3	6.4±0.3	6.4±0.3	18.7min	12.8±0.3
EE25/34/6B	1	25.4±0.5	16.9±0.3	6.35±0.25	6.35±0.25	18.6min	12.83±0.25
EE25/26/7AY	1	25.6±0.5	12.65±0.25	7.2±0.2	7.2±0.2	18min	8.95±0.25
EE25/26/11C	1	25.0+0.8/-0.7	12.8+0/-0.5	11.0+0/-0.5	7.5+0/-0.5	17.5+0.8/-0	8.7+0.5/-0
EE25.4/32/9B	1	25.4±0.4	16±0.2	9±0.25	6.35±0.2	19.25±0.45	12.85±0.25
EE25.4/32.4/10.8D	1	25.4±0.6	16.2±0.25	10.75±0.3	7.55+0/-0.6	17.6min	12.75±0.25
EE25.4/32.4/10.8A	1	25.4±0.4	16.2±0.15	10.75±0.2	7.25±0.25	18.2±0.4	12.6±0.15
EE26/20/7	1	25.9±0.4	9.8±0.2	6.5+0.2/-0.3	6.5±0.2	19min	6.85±0.15
EE26/25.3/7.2	1	26±0.7	12.65±0.25	7.2±0.2	7.35±0.3	18.5min	8.95±0.25
EE26/14/10C	1	26.1+0/-0.6	6.9±0.2	9.75+0.5/-0	5.7±0.2	20.6+0/-0.6	4.05±0.2
EE26/14/15F	1	26.1+0/-0.6	6.85±0.2	15±0.25	5.7±0.2	20.6+0/-0.6	4±0.2
EE26/14/17	1	26.1+0/-0.6	6.75±0.25	17.0±0.25	7.2±0.2	19.0±0.4	3.25±0.25
EE27/35/8A	1	26.5±0.5	17.3±0.3	8±0.3	7±0.3	18.5min	13.5±0.3
EE28/20/11	1	28.0±0.4	10.0+0.4/-0	11.0+0/-0.6	7.5+0/-0.5	18.6min	6.0+0.4/-0

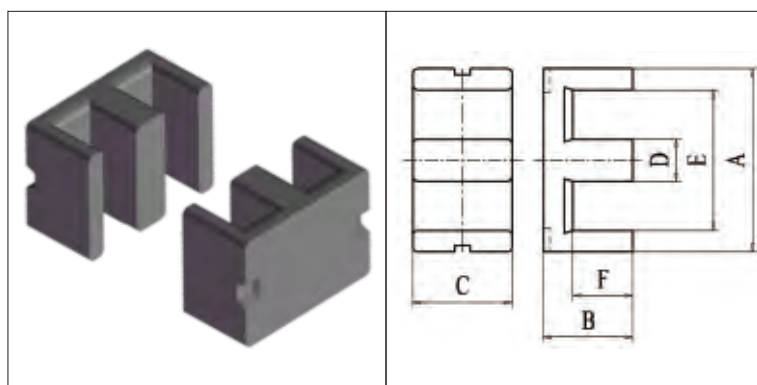


FIG.2

EE 型 / EE Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g /PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
EE25/18/11B	1	0.56	77.81	43.91	3416.60	3800	4740	17.30
EE25/19/6H	1	1.22	39.78	48.37	1924.20	1780	2230	10.00
EE25/19/7B	1	1.15	42.59	48.92	2083.50	1920	2400	10.70
EE25/20/6AG	1	1.22	40.75	49.91	2033.90	1820	2290	10.00
EE25/20/7M	1	1.17	42.34	49.63	2101.30	1870	2350	10.70
EE25/29/6	1	1.73	39.79	68.84	2739.00	1370	1750	15.10
EE25/32/6A	1	1.85	39.82	73.62	2931.60	1290	1650	14.59
EE25/34/6B	1	1.77	42.21	74.79	3157.10	1300	1700	16.20
EE25/26/7AY	1	1.13	51.98	58.52	3041.60	2050	2600	15.10
EE25/26/11C	1	0.75	77.39	57.76	4469.90	3100	3950	22.00
EE25.4/32/9B	1	1.32	56.34	74.14	4177.20	1840	2370	19.10
EE25.4/32.4/10.8D	1	0.94	77.61	72.68	5640.7	2600	3350	14.5
EE25.4/32.4/10.8A	1	0.94	77.61	72.68	5640.70	2900	3350	28.17
EE26/20/7	1	1.24	40.41	49.95	2018.60	1720	2160	10.50
EE26/25.3/7.2	1	1.14	51.50	58.94	3035.40	1950	2500	15.30
EE26/14/10C	1	0.70	56.46	39.67	2239.60	2940	3630	11.03
EE26/14/15F	1	0.47	84.69	39.47	3342.50	4430	5470	16.60
EE26/14/17	1	0.30	118.92	35.78	4255.20	6630	8150	22.10
EE27/35/8A	1	1.33	58.50	77.57	4537.80	1790	2300	23.30
EE27.3/31/11.7	1	0.78	89.91	69.73	6269.30	3100	3980	32.00
EE28/20/11	1	0.57	85.37	48.89	4173.90	3560	4470	21.73

*-AL为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of **MnZn** Ferrtie Material

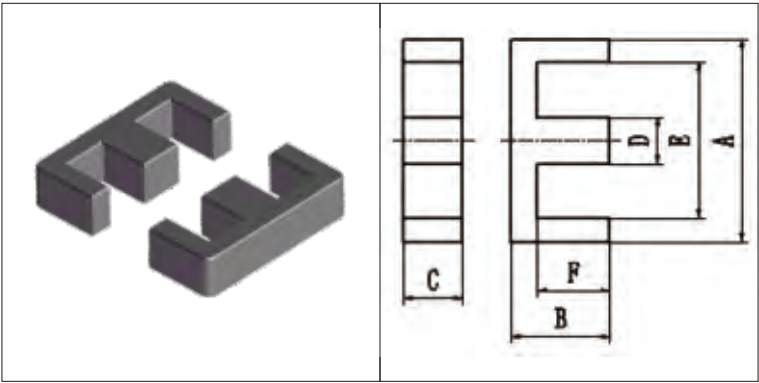


FIG.1

EE 型 / EE Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)					
		A	B	C	D	E	F
EE25/26/7P	1	25.0+0.8/-0.7	12.8+0/-0.5	7.5+0/-0.6	7.5+0/-0.5	17.5+0.8/-0	8.7+0.5/-0
EE25.1/18.3/10.8D	1	25.05±0.75	9.15±0.25	10.75±0.3	7.25±0.25	17.5min	5.55±0.25
EE25.1/24/10.8	1	25.05±0.75	12±0.2	10.75±0.3	7.25±0.25	17.5min	8.4±0.2
EE25.1/25.1/7.2G	1	25.05±0.4	12.55±0.15	7.2±0.15	18.05±0.4	7.25±0.15	8.95±0.2
EE25.1/25.5/10.7	1	25.05±0.4	12.75±0.2	10.75+0.1/-0.3	7.25±0.25	17.95+0.4/-0.35	9.15±0.2
EE25.1/25.6/7.2A	1	25.05±0.4	12.8±0.2	7.2±0.3	7.25±0.25	17.6min	9.2±0.2
EE25/14/17D	1	25.05±0.4	7.1±0.2	17.3+0/-0.5	7.5+0/-0.5	17.6+0.6/-0	3.65±0.15
EE25/15/15	1	25.05±0.4	7.4±0.2	15.3+0/-0.5	7.5+0/-0.5	17.6+0.6/-0	3.95±0.15
EE25/18/11F	1	25.05±0.45	9.15±0.25	10.75±0.3	7.25±0.25	17.5min	5.55±0.15
EE25/18/7	1	25.05±0.75	9.25±0.25	7.25±0.3	7.25±0.25	17.9±0.4	5.65±0.25
EE25/21/7A	1	25.05±0.75	10.5±0.25	7.2±0.3	7.25±0.25	17.5min	6.95±0.25
EE25/25/7A	1	25.05±0.75	12.55±0.25	7.2±0.3	7.25±0.25	17.7min	8.95±0.25
EE25/25/9D	1	25.05±0.75	12.55min	8.85±0.25	7.25±0.25	17.5min	9min
EE25/26/11F	1	25.05±0.75	12.55±0.25	10.75±0.3	7.25±0.25	17.5min	8.95±0.25
EE25/26/7B	1	25.05±0.75	12.55±0.25	7.2±0.3	7.25±0.25	17.5min	8.95±0.25
EE25/20/6BP	1	25.2±0.7	9.35+0.95/-0	6.2+0.45/-0.4	6.2+0.45/-0.6	18.6min	6.9±0.3
EE25.3/25.1/10.8	1	25.3±0.7	12.55±0.25	10.75±0.25	7.2±0.2	17.7min	8.95±0.25
EE25.3/49/5B	1	25.3±0.5	24.55±0.25	5±0.2	7±0.2	18min	21±0.25
EE28/22/11E	1	28.0±0.5	11.0±0.3	10.6±0.3	7.2±0.3	18.6min	6.4±0.3
EE28/22/11A	1	28±0.5	10.7+0.15/-0.1	12±0.3	7.2±0.3	18.6min	6.2+0.15/-0.1
EE28/23.5/11A	1	28.0±0.4	11.75±0.2	10.7±0.25	7.2+0.3/-0.25	19.0+0.4/-0.2	7.45±0.2

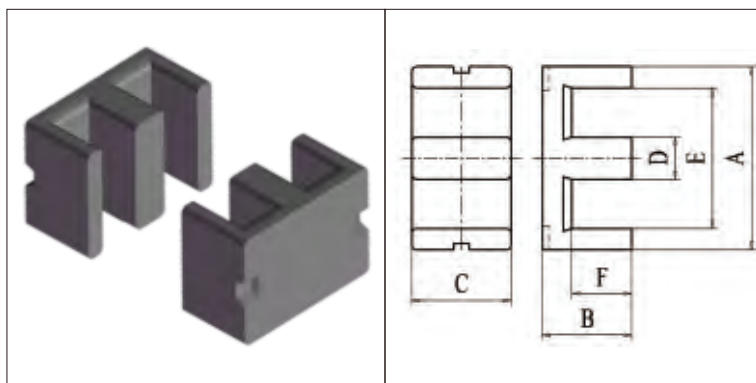


FIG.2

EE 型 / EE Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g /PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
EE25/26/7P	1	1.11	51.84	57.76	2994.20	2100	2650	15.50
EE25.1/18.3/10.8D	1	0.57	77.40	44.16	3417.80	3800	4740	17.50
EE25.1/24/10.8	1	0.73	75.96	55.73	4233.20	3050	3850	21.40
EE25.1/25.1/7.2G	1	1.15	51.43	57.84	2974.60	2040	2600	15.00
EE25.1/25.5/10.7	1	0.77	76.36	58.60	4474.80	3000	3830	22.40
EE25.1/25.6/7.2A	1	1.14	51.57	58.81	3033.00	2030	2570	15.00
EE25/14/17D	1	0.30	120.40	36.31	4371.80	6690	8200	23.00
EE25/15/15	1	0.35	106.34	37.51	3989.00	5770	7100	20.00
EE25/18/11F	1	0.57	77.40	44.16	3417.80	3800	4740	17.50
EE25/18/7	1	0.85	52.20	44.56	2326.00	2550	3180	13.30
EE25/21/7A	1	0.98	50.70	49.86	2528.00	2210	2780	13.10
EE25/25/7A	1	1.14	50.72	57.95	2939.00	1970	2480	14.90
EE25/25/9D	1	0.93	62.69	58.51	3667.90	2430	3100	19.00
EE25/26/11F	1	0.76	75.94	57.93	4398.90	2950	3750	22.80
EE25/26/7B	1	1.14	50.86	57.93	2946.10	1980	2500	15.20
EE25/20/6BP	1	1.35	37.11	50.08	1858.50	1650	2070	9.70
EE25.3/25.1/10.8	1	0.76	76.20	58.17	4432.60	3000	3780	22.10
EE25.3/49/5B	1	3.07	34.64	106.47	3688.10	830	1100	18.20
EE28/22/11E	1	0.57	88.09	50.53	4451.00	3400	4300	24.00
EE28/22/11A	1	0.50	99.12	49.73	4929.50	3900	4900	25.20
EE28/23.5/11A	1	0.63	86.94	54.34	4724.40	3280	4150	24.30

*-AL为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of **MnZn** Ferrtie Material

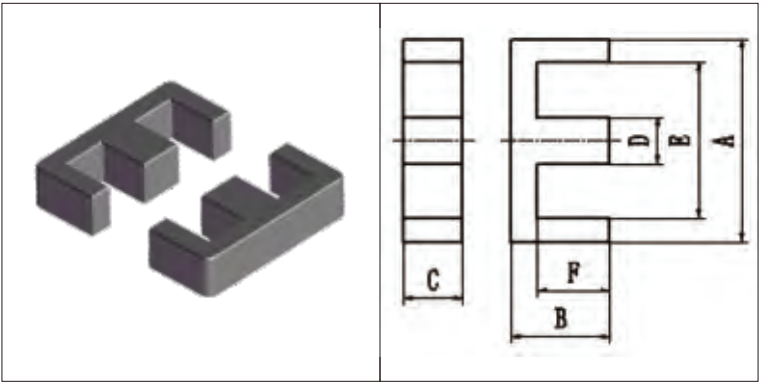


FIG.1

EE 型 / EE Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)					
		A	B	C	D	E	F
EE28/13.8/18	1	28±0.55	6.9±0.15	18±0.35	10±0.2	20±0.45	3.9±0.15
EE28.4/28.4/10	1	28.4±0.4	14.2±0.2	10±0.2	7.2±0.3	20.4±0.4	9.7±0.2
EE28.4/41/12B	1	28.4±0.4	20.4±0.3	11.5+0.1/-0.4	8.2+0.15/-0.2	20.4±0.4	16.4±0.25
EE28.5/20.4/11	1	28.5±0.5	10.2±0.2	11.0±0.3	7.5±0.3	20.5±0.5	5.9±0.2
EE28/21/11F	1	28.5±0.5	10.5±0.3	11±0.3	7.5±0.3	20.5±0.5	6.3±0.3
EE28/25/9B	1	27.94±0.4	12.36±0.2	8.89±0.25	8.89±0.25	19.94±0.7	8.35±0.2
EE28/35/10.7	1	28±0.6	17.5±0.3	10.7±0.3	7.2±0.3	18.5min	12.8±0.3
EE30/26/11A	1	30.0±0.5	13.3±0.3	10.7±0.3	10.7±0.3	19.6min	8.3±0.3
EE30/27/11	1	30.0±0.5	13.6±0.3	10.7±0.3	10.7±0.3	19.6min	8.6±0.3
EE30/30/7L	1	30.0±0.5	15.0±0.3	7.0±0.3	6.9±0.3	19.5min	10.2±0.3
EE30.2/31.8/10.5	1	30.15±0.35	15.9±0.1	10.5±0.2	10.5±0.2	19.9min	10.9±0.15
EE30.2/27.2/10.7	1	30.2±0.5	13.6±0.3	10.7±0.3	10.7±0.3	19.8min	8.6±0.3
EE30/26/11N	1	30.2+0.4/-0.5	13.3±0.3	10.7±0.3	10.7±0.3	19.8min	8.3±0.3
EE30/30/7AA	1	30.2±0.8	15±0.3	7±0.3	6.9±0.3	19.3min	9.7min
EE30.3/16.6/14	1	30.3±0.5	8.3±0.2	14±0.35	4.9±0.2	25.3±0.5	5.8±0.2
EE30.5/29/7	1	30.5±0.4	14.5±0.2	7±0.2	6.9±0.15	20.25±0.45	9.7±0.2
EE30/30/12.3	1	30.5±0.5	15±0.3	12.3±0.25	6.95±0.25	20.3±0.5	10.2±0.3
EE30/30/7B	1	30.5±0.5	15±0.3	7±0.3	6.9±0.3	19.5min	10.2±0.3
EE31/26/9	1	30.7±0.6	13.2±0.2	9.4±0.3	9.4±0.25	21.8min	8.9±0.2
EE31/36/9	1	30.7±0.6	18.5±0.2	9.4±0.3	9.4±0.3	21.6min	14.0±0.2
EE31.8/12.4/20	1	31.75±0.45	6.2±0.13	20±0.4	6.35±0.15	25.45±0.35	3.03±0.15

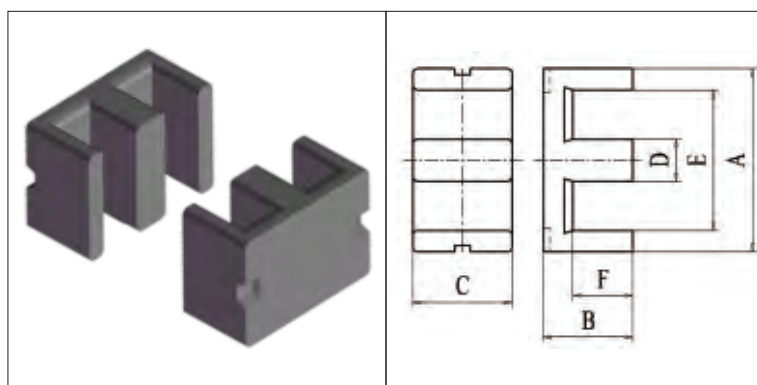


FIG.2

EE 型 / EE Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g /PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
EE28/13.8/18	1	0.25	130.61	33.23	4339.80	7870	9620	26.60
EE28.4/28.4/10	1	0.82	79.22	64.62	5119.00	2670	3400	26.40
EE28.4/41/12B	1	0.99	91.59	90.45	8284.10	2550	3300	42.00
EE28.5/20.4/11	1	0.56	88.49	49.32	4364.10	3760	4720	22.00
EE28/21/11F	1	0.58	87.67	50.80	4453.20	3690	4630	23.00
EE28/25/9B	1	0.78	73.62	57.26	4215.60	2890	3670	20.75
EE28/35/10.7	1	0.87	87.60	75.88	6647.10	2500	3230	33.00
EE30/26/11A	1	0.54	109.04	58.48	6376.80	4240	5380	33.00
EE30/27/11	1	0.55	109.05	59.68	6508.20	4170	5300	33.40
EE30/30/7L	1	1.13	58.45	66.23	3871.10	1750	2240	22.00
EE30.2/31.8/10.5	1	0.65	106.43	69.17	7362.00	3650	4670	36.00
EE30.2/27.2/10.7	1	0.55	109.05	59.88	6530.00	4170	5300	33.50
EE30/26/11N	1	0.54	109.03	58.63	6392.50	4230	5370	32.70
EE30/30/7AA	1	1.11	59.17	65.67	3885.60	1760	2250	20.20
EE30.3/16.6/14	1	0.74	69.62	51.41	3579.20	3030	3820	17.80
EE30.5/29/7	1	1.10	58.88	64.48	3796.60	1790	2280	21.20
EE30/30/12.3	1	0.64	103.60	66.51	6890.90	3090	3950	37.00
EE30/30/7B	1	1.12	59.03	66.07	3900.30	1750	2250	21.80
EE31/26/9	1	0.76	82.05	62.15	5099.40	3000	3800	26.30
EE31/36/9	1	0.99	83.94	82.75	6945.70	2420	3130	35.70
EE31.8/12.4/20	1	0.32	126.67	41.17	5214.5	6500	8300	26.30

*-AL为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of **MnZn** Ferrtie Material

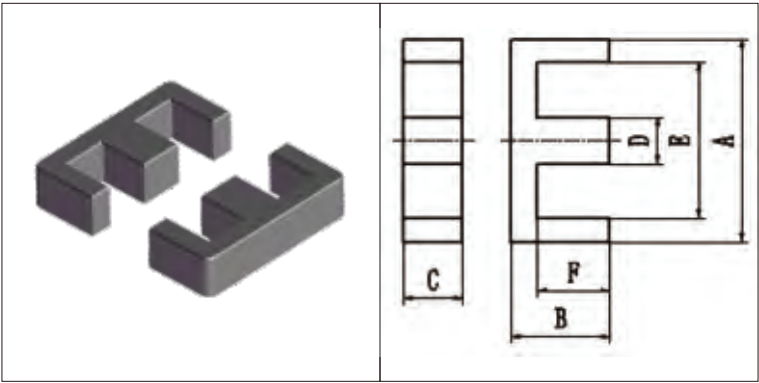


FIG.1

EE 型 / EE Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)					
		A	B	C	D	E	F
EE31.8/20.2/20.3A	1	31.75±0.64	10.18±0.2	20.32±0.4	6.35±0.15	24.5min	7±0.2
EE32/17.6/3.6	1	32±0.5	8.6+0.4/-0	3.6±0.2	7.4±0.2	26.6±0.5	5.5+0.4/-0
EE36/35.8/11.3	1	36±0.5	17.9±0.2	11.25±0.25	9.95±0.25	24.5+1/-0	12.4±0.2
EE40/25/50.8A	1	40+0.5/-0.76	12.5±0.13	50.8±1.02	8.6±0.21	31.4±0.61	8.2±0.25
EE41.3/31.5/12.7	1	41.3±0.5	15.75±0.2	12.7±0.2	12.7±0.2	28min	9.85±0.15
EE41.3/17.1/21A	1	41.3±0.5	8.55±0.15	21±0.35	5±0.25	36.3+0.5/-0.4	6.55±0.15
EE42/19/15C	1	42+1/-0.2	9.5±0.3	15.0+0.2/-0.4	12.2+0/-0.5	29.5+1.2/-0	3.8±0.3
EE42/26/15	1	42.0+1.0/-0.2	13.2±0.2	15.0+0.2/-0.4	12.2+0/-0.5	29.5+1.2/-0	7.4±0.3
EE42/30/15	1	42+1/-0.7	15±0.2	14.9±0.3	12.1±0.4	30.1±0.6	9.2+0.3/-0.4
EE42/30/20	1	42.0+1.0/-0.7	15.0±0.2	20.0+0/-0.8	12.1±0.4	30.1±0.6	9.2±0.3
EE42/30/25C	1	42±0.7	15.1±0.15	25±0.5	12.1±0.3	30.1±0.7	9.2±0.15
EE42/42/15	1	42+1/-0.7	21.2±0.4	15+0.2/-0.4	12+0.2/-0.4	29.5min	15+0.4/-0.1
EE42/42/20A	1	42.0+1.0/-0.7	21.2±0.4	20.0+0.2/-0.5	12.0+0.2/-0.4	29.5min	15.0+0.4/-0.1
EE42/50.7/15B	1	42±0.7	25.35±0.2	15+0.2/-0.25	12.15+0/-0.5	29.5+1.2/-0	19.35±0.2
EE42/65.6/20	1	42+1/-0.7	32.8+0/-0.4	20+0/-0.8	12.2+0/-0.5	29.5+1.4/-0	26+1/-0
EE42/14.6/16	1	42+0.8/-0.5	7.3±0.15	16±0.25	6±0.25	36min	4.3±0.15
EE42/48/15	1	42.1+1/-0.7	24.2±0.4	15+0.2/-0.4	12+0.2/-0.4	29.5min	18+0.4/-0.1
EE43/29/28A	1	43.18±0.51	14.5±0.2	27.9±0.38	8.13±0.2	34.7min	10.5±0.2
EE43/19/28	1	43.2±0.6	9.55±0.3	27.9±0.4	8.15±0.3	34.4min	5.7±0.3
EE43.3/12.7/15.9	1	43.3±0.55	6.35±0.15	16+0.2/-0.4	4.85±0.15	38.5±0.55	4±0.2
EE44/38/15	1	44±0.6	37.6±0.4双	15±0.25	11.7±0.25	31min	23.6±0.4双

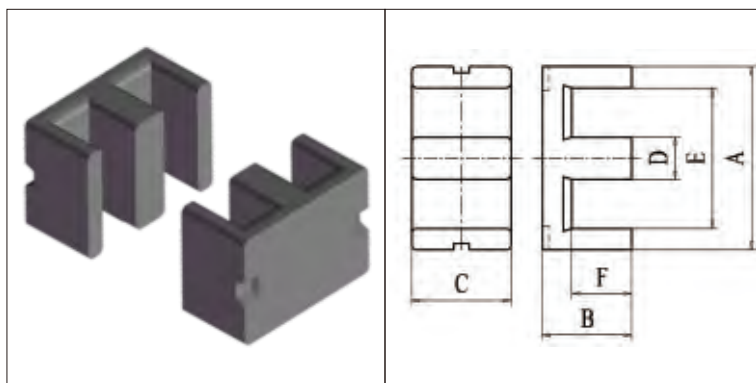


FIG.2

EE 型 / EE Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g /PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
EE31.8/20.2/20.3A	1	0.44	129.58	56.94	7400.4	5600	8200	18.30
EE32/17.6/3.6	1	2.31	22.19	51.28	1138.0	850	1440	3.0
EE36/35.8/11.3	1	0.68	120.0	81.0	9720.0	3700	4800	25.0
EE40/25/50.8A	1	0.16	436.89	69.11	30193.9	15300	19000	155.16
EE41.3/31.5/12.7	1	0.47	157.50	74.41	11719.30	5210	6700	60.00
EE41.3/17.1/21A	1	0.70	91.50	63.94	5850.4	3300	4100	3200.0
EE42/19/15C	1	0.30	174.72	51.79	9049.10	7460	9400	23.77
EE42/26/15	1	0.37	177.27	66.36	11762.80	6260	8000	60.40
EE42/30/15	1	0.42	176.60	73.49	12977.50	5720	7350	65.58
EE42/30/20	1	0.31	233.08	73.37	17101.50	7600	9770	87.00
EE42/30/25C	1	0.25	298.08	73.48	21904.10	9850	12670	112.30
EE42/42/15	1	0.55	176.76	97.93	17310.50	4560	5940	87.15
EE42/42/20A	1	0.42	235.49	97.93	23062.00	6070	7900	117.41
EE42/50.7/15B	1	0.64	178.33	114.40	20400.60	4080	5350	103.00
EE42/65.6/20	1	0.61	235.94	143.25	33798.20	4400	5840	166.69
EE42/14.6/16	1	0.60	94.28	57.02	5375.70	3600	4560	26.60
EE42/48/15	1	0.62	177.00	110.00	19461.00	4170	5450	104.00
EE43/29/28A	1	0.36	224.00	81.68	18296.50	6800	8800	88.29
EE43/19/28	1	0.28	220.71	62.08	13700.60	8200	10450	69.37
EE43.3/12.7/15.9	1	0.76	75.4	57.12	4307.0	3000	3900	10.7
EE44/38/15	1	0.46	189.20	87.19	16496.50	5090	6600	94.50

*-AL为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of **MnZn** Ferrtie Material

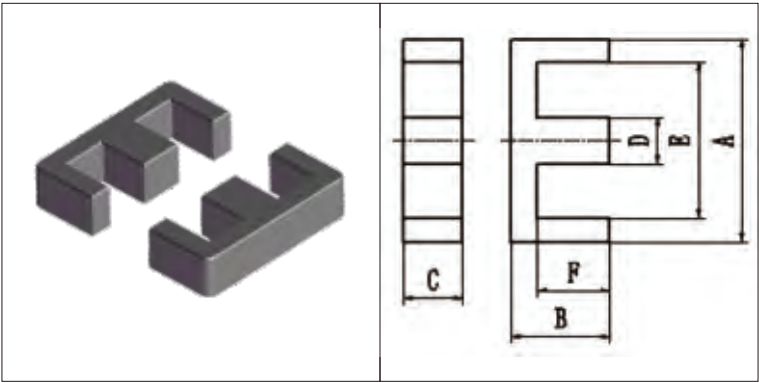


FIG.1

EE 型 / EE Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)					
		A	B	C	D	E	F
EE47/13.6/13	1	47±0.5	6.8±0.15	13±0.2	6.1±0.15	41.1±0.5	3.9±0.15
EE50/43.1/14.6	1	50.0±0.7	21.55±0.3	14.6±0.4	14.6±0.4	34.0min	13.1±0.3
EE50.4/12.8/16.5	1	50.4±0.5	6.4±0.15	16.5±0.2	5.6±0.15	44.2±0.4	3.6±0.2
EE51/60/24B	1	50.6±0.5	30+0.3/-0.1	23.8±0.3	15±0.3	35.8min	22.9+0.3/-0.1
EE55/55/21A	1	55.15±1.05	27.5±0.3	21+0/-0.8	16.95±0.25	37.5min	18.8±0.3
EE55/55/25A	1	55.15±1.05	27.5±0.3	24.6±0.4	16.95±0.25	37.5min	18.8±0.3
EE56.1/47.2/18.8	1	56.1±1	23.6±0.25	18.8±0.25	18.8±0.25	38.1min	14.6±0.2
EE57/55/21	1	56.55±1	27.5±0.3	21+0/-0.8	17.2+0/-0.5	39.2+1.5/-0	18.5+0.8/-0
EE58.4/19/38.1	1	58.4±1.2	9.5±0.2	38.1±0.8	8.1±0.2	50min	5.5±0.15
EE58.8/34/38.1	2	58.8+0.8/-1.2	17±0.2	38.1±0.8	8.1±0.2	50min	13.0±0.25
EE60.2/72/15.6	1	60+1.2/-0.8	36±0.3	15.6±0.4	15.6±0.4	43.7min	28±0.3
EE63.8/40/50.3	2	63.8±1.3	20±0.15	50.3±1	10.2±0.25	52.5min	14.9±0.25
EE64/20/51B	1	64.0±0.76	9.78±0.15	50.8±0.64	10.16±0.25	52.9min	4.7±0.25
EE65/65/20	1	65+0/-3	32.5±0.3	20.0+0/-1.4	20.0+0/-1.4	43min	23.5+1.2/-0
EE65/65/27A	1	65.2±1.3	32.5±0.3	27.4+0/-1.0	19.65±0.35	44.2min	22.55±0.35
EE65.7/24.5/50.8A	1	65.7±1.2	12.25±0.13	50.8±0.9	12±0.25	54.1±1	6.25±0.25
EE66/65/27B	1	66±1	32.8+0/-0.6	27.5+0/-1	20+0/-0.7	46min	22.2+0.6/-0
EE70/66/32	1	70.5±1	33.2+0/-0.5	32+0/-0.8	22+0/-0.7	48+1.5/-0	21.9+0.7/-0
EE80/76/20	1	80±1.6	38.1±0.3	19.8±0.4	19.8±0.4	59.1min	28.2±0.3
EE88/88/27.1	1	88±1.3	44±0.3	27.1±0.5	28.7±0.5	57.6min	29.5±0.3
EE100/118.8/27.5	1	100.3±1.5	59.4±0.5	27.5±0.5	27.5±0.5	72min	46.85±0.7

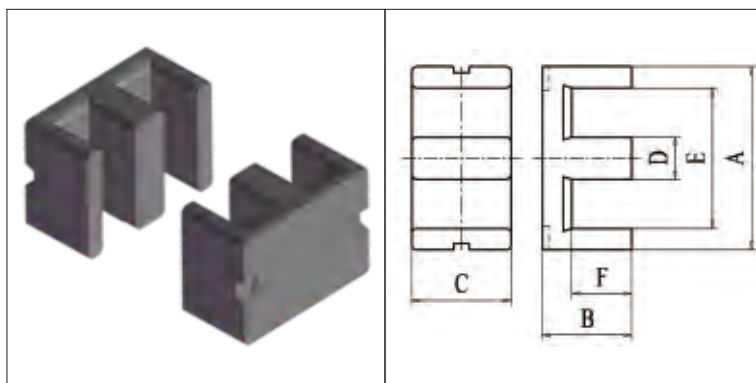


FIG.2

EE 型 / EE Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g / PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
EE47/13.6/13	1	0.79	76.24	59.85	4563.00	3000	3810	23.60
EE50/43.1/14.6	1	0.43	225.58	97.37	21963.8	6000	7700	57.5
EE50.4/12.8/16.5	1	0.66	93.71	61.96	5806.60	3590	4570	29.00
EE51/60/24B	1	0.39	345.74	135.89	46982.30	6680	8800	235.44
EE55/55/21A	1	0.35	349.02	123.61	43141.00	7350	9660	262.79
EE55/55/25A	1	0.30	416.80	123.61	51521.10	8770	11540	263.67
EE56.1/47.2/18.8	1	0.32	336.13	106.73	35874.10	7800	10200	184.60
EE57/55/21	1	0.36	347.99	125.26	43589.90	7260	9550	215.00
EE58.4/19/38.1	1	0.26	299.05	77.27	23105.96	8790	11300	112.00
EE58.8/34/38.1	2	0.23	305.00	107.20	32696.00	7420	9710	168.00
EE60.2/72/15.6	1	0.67	245.5	165.70	40679.4	4000	5400	101.00
EE63.8/40/50.3	2	0.23	514.00	119.00	61166.00	11420	15000	301.80
EE64/20/51B	1	0.15	517.66	78.33	40546.80	16300	21100	213.39
EE65/65/20	1	0.41	365.31	148.21	54141.90	5900	7840	268.35
EE65/65/27A	1	0.28	530.94	147.13	78116.10	9700	12800	395.02
EE65.7/24.5/50.8A	1	0.14	599.34	86.03	51560.60	17200	22400	258.76
EE66/65/27B	1	0.28	526.65	148.18	78037.90	9300	12400	390.00
EE70/66/32	1	0.22	683.00	150.00	102391.00	12200	16100	521.23
EE80/76/20	1	0.47	393.40	184.18	72454.80	5880	7840	360.00
EE88/88/27.1	1	0.25	782.92	193.73	151677.40	11220	14970	771.40
EE100/118.8/27.5	1	0.37	731.46	274.15	200530.50	7150	9630	996.00

*-AL为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。