

锰锌氧铁材料规格尺寸 Specification and Dimensions of **MnZn** Ferrtie Material

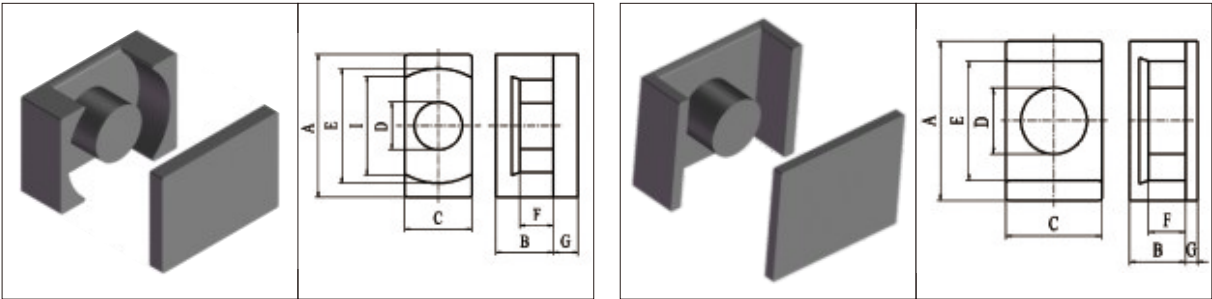


FIG.1

FIG.2

EIR 型 / EIR Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)							
		A	B	C	D	E	F	G	I
EIR9.8/7.8/4	1	9.8±0.25	5.8±0.15	4±0.2	3±0.15	8±0.25	3.8±0.15	2±0.1	
EIR9.8/7.9/4	1	9.8±0.25	5.9±0.15	4±0.2	3±0.15	7.75min	3.9±0.15	2±0.1	7.1±0.25
EIR9.8/8.7/4A	1	9.8±0.25	6.7±0.15	4±0.2	3±0.15	7.7min	4.7±0.15	2±0.1	
EIR10.3/8.4/2A	1	10.3±0.25	5.8±0.15	4.2±0.2	3±0.15	8.7±0.25	3.6±0.15	2.2±0.15	
EIR10.3/8.7/4.2	1	10.3±0.25	6.4±0.15	4.2±0.2	3±0.15	8.7±0.25	4.1±0.15	2.3±0.15	
EIR10.5/7.6/8.2	4	10.5±0.1/-0.15	6.25±0.1	8.2±0.15	4.8±0.1	8.5±0.15	4.95min	4.2±0.1/-0.15	
EIR12/5/9	2	12±0.15	3.55±0.1	9.0±0.2	4.8±0.1	10.0±0.25	2.55±0.1	1.0±0.05	
EIR12.8/8.3/8.7	1	12.8±0.35	7.2±0.1	8.7±0.25	5±0.2	11.2±0.35	6.1±0.1	1.1±0.05	9.05±0.35
EIR13/4/9E	2	12.8±0.3	3.35±0.1	8.7±0.25	5.0±0.15	11.2±0.3	2.25±0.1	1.1±0.1	
EIR13.6/6/11.6A	4	13.6±0.15/-0.25	4.5max	11.6±0.18	6.5±0.1/-0.12	11.2±0.22/-0.15	2.65min		
EIR14.5/7.4/9.3	1	14.5±0.3	5.6±0.15	9.25±0.3	5.8±0.2	12.2±0.3	3.8±0.2	1.8±0.1	9min
EIR18/4.3/9.7A	1	18±0.35	2.75±0.1	9.7±0.2	6.2±0.2	15.15min	1.2±0.15	1.55±0.1	13.1min
EIR18/7.2/9.7	1	18±0.35	4.9±0.1	9.7±0.2	6.2±0.15	15.6±0.35	3.3±0.2	1.6±0.1	13.5min
EIR18/8/9.7A	1	18±0.35	6.4±0.1	9.7±0.2	6.2±0.15	15.6±0.3	4.8±0.15	1.6±0.1	13.5min
EIR18/8.5/10A	4	18±0.35	6.5±0.15	10±0.25	7.14±0.15	14.3min	4.5±0.15	2±0.2	
EIR18.5/8.6/7.5	1	18.5±0.3	6.4±0.15	7.5±0.2	5.9±0.15	15.4±0.25	4.2±0.15	2.2±0.15	18.6±0.3
EIR18.5/11.5/12	2	18.3±0.6/-0.15	9±0.15	12±0.2	6.2±0.2	15.15min	6.5±0.15	1.5±0.2	
EIR19.2/9/7.3A	1	19.2±0.4	6±0.2	7.3±0.2	7.3±0.2	15min	3.2±0.2	3±0.15/-0	14±0.4
EIR19.8/8/6.6E	1	19.8±0.6/-0.3	5.8±0.1	6.6±0.25/-0.15	6±0.25/-0.15	15.8±0.55/-0.15	3.6±0.15	2.2±0.15	
EIR19.8/8.2/6.6	1	19.8±0.4	6±0.15	6.6±0.2	6±0.15	15.8±0.3	3.8±0.15	2.2±0.15	
EIR20/8/7A	1	19.8±0.6/-0.3	5.8±0.15	6.6±0.25/-0.15	6±0.25/-0.15	15.8±0.65/-0.25	3.6±0.15	2.2±0.1	
EIR20/8/7N	1	19.8±0.6/-0.3	6±0.15	6.6±0.25/-0.15	6±0.25/-0.15	15.8±0.55/-0.15	3.8±0.15	2.2±0.15	

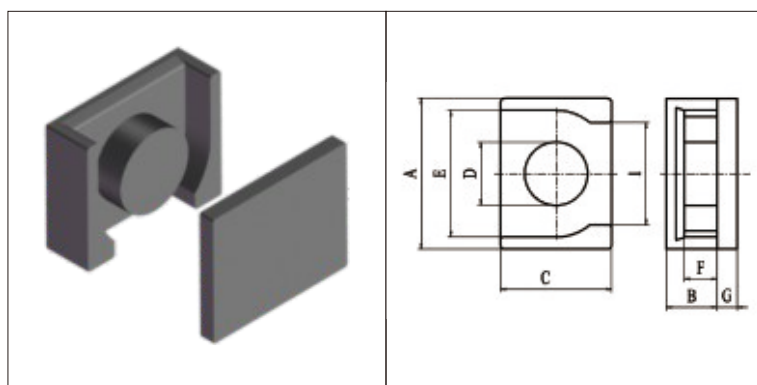


FIG.4

EIR 型 / EIR Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g / PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
EIR9.8/7.8/4	1	1.73	9.33	16.10	150.30	640	750	1.04
EIR9.8/7.9/4	1	1.75	9.3	16.29	151.5	800	950	1.05
EIR9.8/8.7/4A	1	1.96	9.1	17.82	162.2	750	900	1.10
EIR10.3/8.4/2A	1	1.67	9.53	15.95	152.00	650	750	1.20
EIR10.3/8.7/4.2	1	1.82	9.37	17.03	159.6	1000	1300	1.30
EIR10.5/7.6/8.2	4	0.94	19.67	18.45	363.00	1500	1800	2.47
EIR12/5/9	2	0.94	18.03	16.90	304.80	1600	1870	1.49
EIR12.8/8.3/8.7	1	1.02	21.03	21.48	451.8	1600	1900	2.00
EIR13/4/9E	2	0.72	18.86	13.54	255.30	1370	1580	1.45
EIR13.6/6/11.6A	4	0.44	35.96	15.94	573.20	3100	3500	3.42
EIR14.5/7.4/9.3	1	0.62	30.51	18.88	576.2	2550	3000	1.89
EIR18/4.3/9.7A	1	0.55	30.75	16.91	520.0	2700	3100	2.67
EIR18/7.2/9.7	1	0.67	31.43	21.18	665.80	2600	3200	4.30
EIR18/8/9.7A	1	0.56	37.48	21.1	790.9	2950	3450	5.15
EIR18/8.5/10A	4	0.61	39.48	24.03	948.50	2800	3350	4.90
EIR18.5/8.6/7.5	1	0.82	30.16	24.59	741.8	2150	2600	4.00
EIR18.5/11.5/12	2	0.72	39.18	28.40	1112.60	2000	2400	7.40
EIR19.2/9/7.3A	1	0.59	38.94	23.09	899.2	2900	3430	5.80
EIR19.8/8/6.6E	1	0.86	28.58	24.65	704.5	2050	2700	3.90
EIR19.8/8.2/6.6	1	0.85	28.96	24.73	716.3	2300	2650	3.95
EIR20/8/7A	1	0.84	29.17	24.49	714.40	2300	3100	3.75
EIR20/8/7N	1	0.84	29.17	24.49	714.4	2100	2500	3.82

*-AL为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of **MnZn** Ferrtie Material

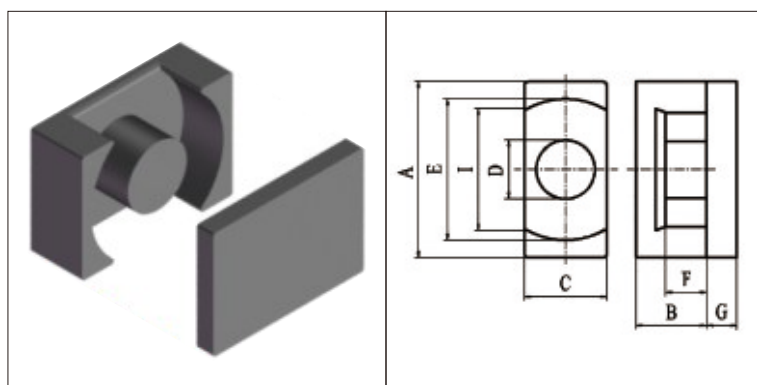


FIG.1

EIR 型 / EIR Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)							
		A	B	C	D	E	F	G	I
EIR20/9/14B	1	20.0±0.35	6.3±0.15	14.0±0.3	8.8±0.2	18.0±0.35	4.1±0.2	2.3±0.15	12.86±0.35
EIR20/13/14	1	20±0.35	11.1±0.1	14±0.3	8.8±0.2	18±0.35	9.2±0.15	1.9±0.05	12.5min
EIR20.7/8.6/14.6A	1	20.65±0.35	6.65±0.1	14.6±0.3	7.62±0.15	18.1±0.35	4.7±0.2	1.95±0.1	16.85±0.35
EIR21.8/9.3/17.3	4	21.8±0.4	7.15±0.2	17.3±0.4	9.2±0.15	18.4±0.4	5.05±0.15	2.15±0.15	10.75±0.4
EIR22.6/8.2/14A	1	22.6±0.4	6±0.1	14±0.3	8.8±0.2	19.7min	3.8±0.2		
EIR22.6/9.1/14	1	22.6±0.4	6.9±0.1	14±0.3	8.8±0.2	19.7min	4.7±0.2	2.2±0.1	15.7+0.6/-0.2
EIR22.6/10.1/14B	4	22.6±0.4	7.9±0.15	14±0.4	8.8±0.2	19.2±0.4	5.7±0.15	2.2±0.15	15.9±0.4
EIR22.6/11/14B	1	22.6±0.4	8.8±0.1	14±0.3	8.8±0.2	19.7min	6.6±0.2	2.2±0.15	15.7+0.6/-0.2
EIR23/7/13A	1	23.2±0.45	5.1±0.1	12.5±0.25	8±0.2	20.2±0.4	3.1±0.15	2.1±0.1	17.5min
EIR23.6/6.7/17	1	23.6±0.4	4.2±0.15	17±0.3	10.8+0.1/-0.2	20.6+0.6/-0.1	1.7±0.15		14.6+0.5/-0.2
EIR24.9/16.4/20.1	4	24.9±0.4	13.5±0.15	20.1±0.4	11.2±0.2	21.7±0.4	10.65±0.15	2.85±0.15	13±0.45
EIR25/8/18A	1	25±0.4	5.6±0.1	18±0.3	11±0.2	22±0.4	3.2±0.15	2.3±0.1	14.5min
EIR25/10/18C	1	25.0±0.4	8.0±0.1	18.0±0.3	11.0±0.2	22.0±0.4	5.15±0.15	2.3±0.1	15.2±0.7
EIR25/14/18	1	25±0.4	12.1±0.1	18±0.3	11±0.2	22±0.4	10.2±0.15	1.9±0.1	14.5min
EIR28/8.2/12	1	28±0.4	5.6±0.15	12±0.3	9±0.2	23.4±0.4	3±0.2	2.6±0.2	
EIR28/9/12O	1	28±0.3	6.6±0.15	12±0.25	9+0.1/-0.3	23.4+0.4/-0.2	4±0.2	2.6±0.2	
EIR28/9.5/12B	1	28±0.35	6.7±0.15	12±0.3	9±0.2	23.4+0.4/-0.3	3.8±0.15	2.8±0.15	21.5±0.35
EIR28/9.7/12	1	28±0.4	7.35±0.1	12±0.2	9±0.2	23.4±0.4	5.05±0.15	2.3±0.1	
EIR29/10.1/11	1	29±0.4	7.1±0.15	11±0.3	8±0.15	24.4±0.3	4.1±0.15	3±0.15	
EIR28/18/11A	1	28.55±0.55	14.0±0.2	11.4±0.25	9.9±0.25	21.2min	9.65±0.25	3.5±0.3	
EIR29/10/11	1	29±0.4	7±0.15	11±0.3	8±0.15	24.4±0.3	4±0.15	3±0.15	
EIR30/9.1/20B	1	30±0.4	6.4±0.15	20±0.3	11±0.2	26±0.4	3.7±0.2	2.7±0.1	19.15min

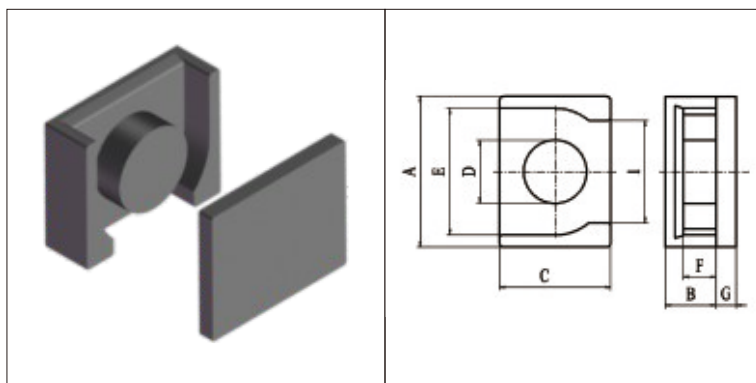


FIG.4

EIR 型 / EIR Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g / PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
EIR20/9/14B	1	0.39	60.09	23.58	1416.70	4350	5100	8.17
EIR20/13/14	1	0.58	56.97	33.2	1891.1	3400	4100	9.95
EIR20.7/8.6/14.6A	1	0.44	55.39	24.48	1355.90	3300	4000	7.70
EIR21.8/9.3/17.3	4	0.37	73.28	27.19	1992.50	4600	5500	11.36
EIR22.6/8.2/14A	1	0.44	60.63	26.44	1603.1	4200	5000	8.85
EIR22.6/9.1/14	1	0.45	60.85	27.34	1663.60	4200	5050	9.80
EIR22.6/10.1/14B	4	0.50	60.51	30.24	1829.60	3700	4500	9.90
EIR22.6/11/14B	1	0.51	60.78	31.14	1892.7	3800	4600	10.00
EIR23/7/13A	1	0.53	50.20	26.60	1340.00	3400	4170	7.03
EIR23.6/6.7/17	1	0.26	91.0	23.6	2147.6	6700	8000	10.80
EIR24.9/16.4/20.1	4	0.40	103.53	41.59	4305.70	5100	6300	22.30
EIR25/8/18A	1	0.26	93.30	24.25	2262.40	6600	7800	13.70
EIR25/10/18C	1	0.29	97.10	28.50	2771.00	5600	7450	15.90
EIR25/14/18	1	0.41	89.75	37.14	3333.2	5000	6100	17.50
EIR28/8.2/12	1	0.46	63.72	29.35	1870.2	4100	5000	11.05
EIR28/9/120	1	0.50	63.26	31.47	1991.00	3800	4600	11.90
EIR28/9.5/12B	1	0.47	67.17	31.35	2105.8	3600	5100	11.50
EIR28/9.7/12	1	0.55	59.71	32.83	1960	3600	4400	10.85
EIR29/10.1/11	1	0.55	60.51	33.48	2026.1	3600	4400	9.70
EIR28/18/11A	1	0.55	82.10	45.50	3735.60	4000	4900	21.50
EIR29/10/11	1	0.55	60.51	33.48	2026.10	3000	3700	11.30
EIR30/9.1/20B	1	0.27	110.25	29.83	3288.4	7100	8600	19.75

*-AL为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of **MnZn** Ferrtie Material

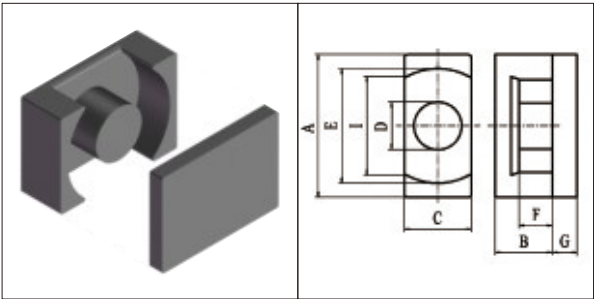


FIG.1

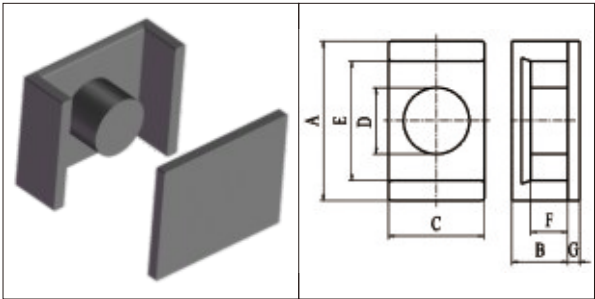


FIG.2

EIR 型 / EIR Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)							
		A	B	C	D	E	F	G	I
EIR30/11/20C	1	30±0.4	8±0.15	20±0.3	11±0.2	26±0.4	5.3±0.2	2.7±0.1	
EIR30/12.3/20A	1	30±0.4	12.25±0.25	20±0.3	11±0.2	26.0±0.4	6.85±0.15	2±0.15	19.4±0.4
EIR30/14/20K	1	30±0.4	12.1±0.1	20±0.3	11±0.2	26±0.4	10.2±0.15		
EIR30/14.6/23	1	30±0.5	11.6±0.15	23±0.4	14.6±0.25	25.2±0.5	8.6±0.15	3±0.1	19.5min
EIR30.2/9.9/20A	3	30.2±0.42	7.25±0.15	20±0.3	11.3±0.2	25±0.38	4.6±0.15	6.65±0.2	2.65±0.1
EIR30.2/11.1/20E	3	30.2±0.5	8.35±0.1	20±0.3	11.3±0.2	25+0.5/-0.1	5.5+0.25/-0		2.75±0.1
EIR30.2/15.1/20	3	30.2±0.42	12.35±0.15	20±0.3	11.3±0.2	25±0.38	9.55±0.15		2.75±0.1
EIR30.3/12.7/20.3	1	30.3±0.5	9.9±0.15	20.3±0.3	13.3±0.2	25.7±0.4	7.1±0.2		
EIR31.5/13.1/20.3A	1	31.5±0.4	9.8±0.15	20.3±0.25	13.3±0.15	27±0.4	6.5±0.15	3.3±0.15	20.8min
EIR32/9.4/21A	1	32±0.6	7±0.15	21±0.4	11.2±0.2	29.7±0.6	4.6±0.2	2.4±0.15	23±0.6
EIR32.2/8.4/22	1	32.2±0.6	5.83±0.2	22±0.4	11±0.3	29±0.6	3.28±0.2	2.55±0.1	23±0.4
EIR32.2/9.8/23C	1	32.2±0.7	7±0.2	23±0.3	13±0.3	29±0.5	4.2±0.2	2.8±0.1	23.8±0.5
EIR32.2/15.6/23	1	32.2±0.5	12.8±0.1	23±0.3	13±0.3	29±0.5	10+0.2/-0.15	2.8±0.1	23.8±0.5
EIR34/17.5/23	1	34±0.45	14.5+0.1/-0.14	23±0.35	13.8±0.2	29+0.45/-0.4	11.5±0.18	3±0.1	26±0.4
EIR35/25/11A	2	35.0±0.5	20.4±0.2	11.3±0.3	11.3±0.25	25.6min	14.7±0.3	4.6±0.2	5.7±0.2
EIR35.5/10.8/24A	1	35.5±0.4	7.45±0.15	24±0.25	15±0.15	30.6±0.4	4.1±0.15	3.35±0.1	
EIR38/18.7/21	1	38±0.5	12±0.2	21±0.3	11.5±0.15	32±0.5	7.5±0.2	6.7±0.1	26±0.5
EIR38.1/10.7/25.4	1	38.1±0.7	8±0.15	25.4±0.5	14±0.2	33.1±0.6	5.3±0.2	2.7±0.15	24.76±0.5
EIR38.2/22/20.1	1	38.15+0.6/-0.5	17.5±0.15	20.1±0.3	15.05±0.25	29+0.6/-0.4	13±0.2	4.5±0.1	
EIR41/27.6/28	5	41±0.6	21.15±0.2	28±0.6	19±0.3	33.5±0.6	14.75±0.2		28min
EIR50/38.2/32	1	50±0.7	30.6±0.15	32±0.5	23±0.35	40.5±0.7	23±0.25	7.6±0.1	32.7±0.7

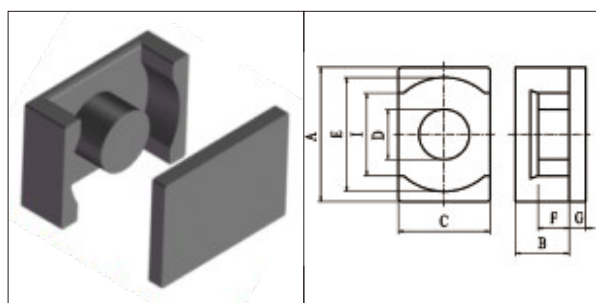


FIG.3

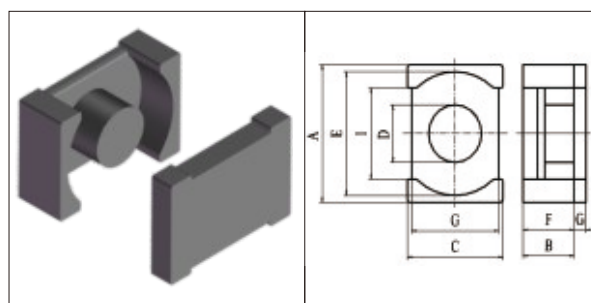


FIG.5

EIR 型 / EIR Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g /PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
EIR30/11/20C	1	0.30	110.10	32.93	3625.00	6000	7100	21.35
EIR30/12.3/20A	1	0.33	109.98	35.92	3950.9	7300	9000	22.56
EIR30/14/20K	1	0.42	96.22	40.46	3893.3	5000	6250	22.30
EIR30/14.6/23	1	0.21	177.27	36.54	6477.8	10000	12000	34.50
EIR30.2/9.9/20A	3	0.33	104.17	34.38	3581.60	5800	8000	17.20
EIR30.2/11.1/20E	3	0.34	106.20	36.35	3860.40	5600	6900	21.40
EIR30.2/15.1/20	3	0.39	105.60	41.10	4340.20	5500	6800	24.90
EIR30.3/12.7/20.3	1	0.28	129.75	36.62	4751.4	6200	7700	27.70
EIR31.5/13.1/20.3A	1	0.26	140.65	36.84	5181.5	7900	9700	31.56
EIR32/9.4/21A	1	0.34	101.28	34.67	3511.6	5900	7200	20.00
EIR32.2/8.4/22	1	0.28	112.56	31.21	3512.4	7000	8500	22.50
EIR32.2/9.8/23C	1	0.24	136.11	32.27	4392.4	8300	10100	22.00
EIR32.2/15.6/23	1	0.32	134.00	43.10	5775.40	6700	8400	32.67
EIR34/17.5/23	1	0.30	157.94	46.93	7412.8	7450	9300	39.00
EIR35/25/11A	2	0.57	105.70	60.34	6378.00	4000	5250	35.86
EIR35.5/10.8/24A	1	0.22	177.15	38.36	6795.5	9650	11900	106.00
EIR38/18.7/21	1	0.28	159.28	45.18	7196.4	7700	9150	52.70
EIR38.1/10.7/25.4	1	0.24	158.21	37.69	5962.5	8700	10700	30.00
EIR38.2/22/20.1	1	0.32	178.37	57.58	10270.5	7200	9100	56.80
EIR41/27.6/28	5	0.22	287.16	62.75	18018.70	10700	13700	101.56
EIR50/38.2/32	1	0.21	421.65	86.47	36460.9	12300	15900	204.00

*-Al为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。