



锰锌氧铁材料规格尺寸 Specification and Dimensions of MnZn Ferrite Material

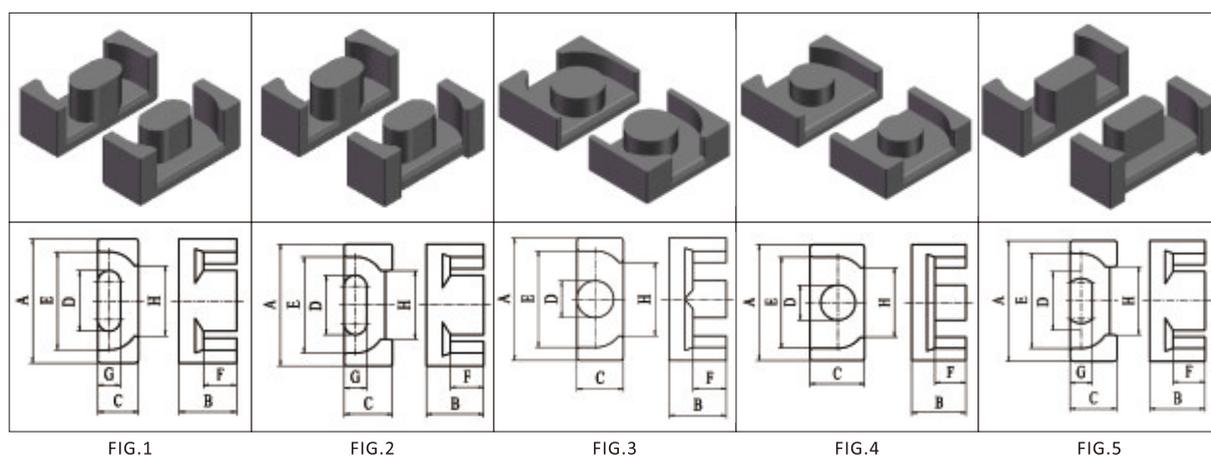

EPC 型 / EPC Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)							
		A	B	C	D	E	F	G	H
EPC8.8/4.6/9D	4	8.8±0.12	2.3±0.1	9±0.15	4.6±0.1	7.2±0.12	1.2±0.1/-0.07		
EPC10I	1	10.2±0.2	4.05±0.1	3.4±0.16	5±0.1	7.6min	2.65±0.15	1.9±0.1	5.3min
EPC10.5/10.7/4.2	5	10.5±0.3	5.3±0.2/-0.1	4.2±0.2	3.5±0.1	8.5±0.25	4.2±0.2/-0.1		
EPC12.3/5/9	8	12.3±0.2	2.5±0.1	9±0.2	5.6±0.15	10±0.2	1.1±0.1		8.6±0.2
EPC12.5/8.4/8.3	3	12.5±0.3/-0.1	4.18±0.1	8.3±0.05/-0.35	4.9±0.1/-0.3	10.5min	3.18±0.15	1±0.1	5.7min
EPC12.8/8.4/8.7	4	12.8±0.3	4.2±0.1	8.7±0.25	5.5±0.15	11.2±0.3	3.1±0.15		9.05±0.3
EPC12.9/8.4/9.3	4	12.85±0.25	4.2±0.1	9.3±0.25	5.3±0.1	10.5min	3.05±0.1		
EPC13	2	13.3±0.3	6.6±0.2	4.6±0.15	5.6±0.15	10.5min	4.5±0.2	2.05±0.1	8.3min
EPC13/13/7	3	12.5±0.4	6.4±0.1	7.2±0.2	4.3±0.2	9.7min	4.7±0.2		5.5min
EPC13.6/13.6/4.6	2	13.6±0.3	6.8±0.2	4.6±0.15	5.6±0.15	10.8min	4.6min	2.05±0.2	8.6min
EPC14	7	13.75±0.25	6.85±0.15	6.86±0.15	6.2±0.1	9.56min	4.55±0.15	5.15±0.1	7.64min
EPC14.3/11/11A	8	14.3±0.25	5.5±0.075	11±0.15	7±0.15	11.6±0.25	3.1±0.15		10.2±0.25
EPC15.3	6	15.3±0.3	6.5±0.1	3.7±0.1	7.95±0.1	12.5±0.3	4.6±0.2	1.8±0.1	11.7±0.3
EPC15.5/9/11	8	15.5±0.15	4.5±0.1	11±0.15	7.1±0.1	12.7±0.1/-0.2	2.9±0.1	1.2±0.15	10.7±0.15
EPC16A	5	16±0.3	7.5±0.2	7.5±0.2	5.8±0.2	12.5min	5.5±0.2	4.8±0.2	10min
EPC16E	9	16±0.3	3.8±0.15	8.1±0.2	5.5±0.15	14±0.3	1.5±0.15	6.55±0.25	
EPC16.5/10.1/14.9	8	16.45±0.25	5.06±0.1	14.86±0.2	7.95±0.15	14.3±0.25	3.06±0.15		
EPC16.8	1	16.8±0.4	7.3±0.2	5.7±0.2	7.5±0.15	13.5min	5.5±0.2		
EPC17.4/16.2/7A	13	17.4±0.3	8.1±0.1	7±0.15	7.7±0.15	13.85min	5.4±0.15	3.8±0.1	2.7±0.15
EPC17N	2	17.5±0.3	8.4±0.1	6±0.15	7.7±0.15	14.3min	5.9±0.15	2.8±0.1	11.5min
EPC17	2	17.6±0.38	8.55±0.2	6.0±0.15	7.7±0.15	14.3min	6.05±0.2	2.8±0.1	

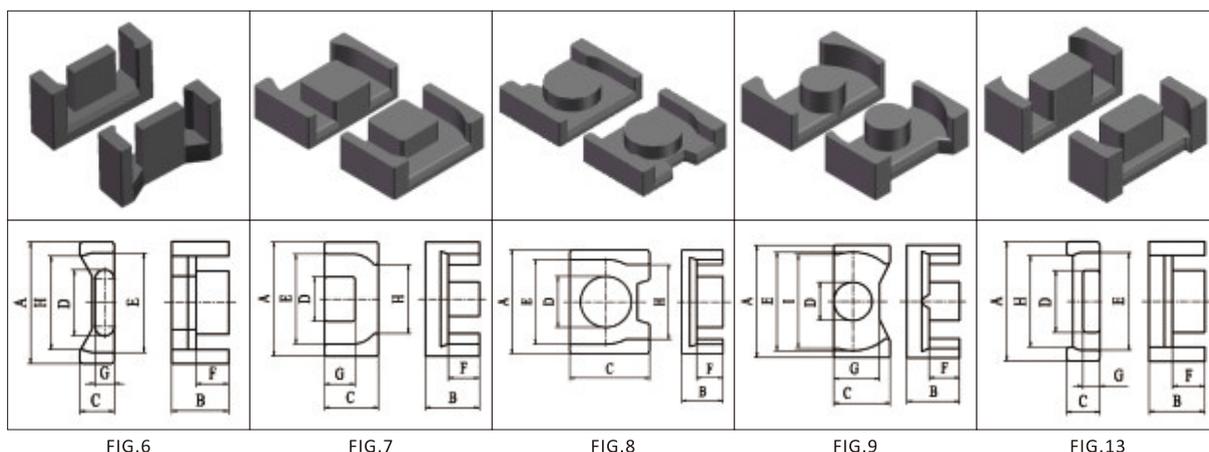


EPC 型 / EPC Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g / PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
EPC8.8/4.6/9D	4	0.62	19.0	11.8	11.8	2004	2258	0.63
EPC10I	1	1.93	9.20	17.71	163.00	870	1010	1.70
EPC10.5/10.7/4.2	5	3.0	8.73	26.09	227.7	614	736	1.1
EPC12.3/5/9	8	0.58	24.60	14.33	352.60	2270	2590	0.95
EPC12.5/8.4/8.3	3	1.12	18.96	21.31	404.00	1300	1540	1.95
EPC12.8/8.4/8.7	4	1.22	18.29	22.25	406.90	1230	1460	2.40
EPC12.9/8.4/9.3	4	0.71	23.12	16.38	378.70	2430	2810	3.00
EPC13	2	2.25	12.79	28.76	367.80	840	1020	2.23
EPC13/13/7	3	1.34	19.30	25.80	498.00	1270	1520	3.45
EPC13.6/13.6/4.6	2	2.35	12.75	29.97	382.10	820	990	2.13
EPC14	7	1.04	27.55	28.76	792.40	1940	2340	4.72
EPC14.3/11/11A	8	0.74	34.97	25.76	900.80	2560	3060	5.75
EPC15.3	6	2.58	11.47	29.65	340.10	720	880	2.20
EPC15.5/9/11	8	0.64	37.49	23.81	892.60	2800	3300	4.80
EPC16A	5	1.39	25.32	35.16	890.40	1600	1960	4.60
EPC16E	9	0.70	28.38	19.94	565.80	2250	2650	3.20
EPC16.5/10.1/14.9	8	0.48	52.91	25.43	1345.60	3500	4200	7.40
EPC16.8	1	1.84	18.95	34.88	661.0	1106	1355	4.5
EPC17.4/16.2/7A	13	1.32	27.81	36.58	1017.20	18600	2290	2.70
EPC17N	2	1.76	22.00	39.00	858.00	1080	1330	4.57
EPC17	2	1.76	22.07	38.87	857.90	1080	1330	4.88

*-Al为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N²

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of MnZn Ferrite Material

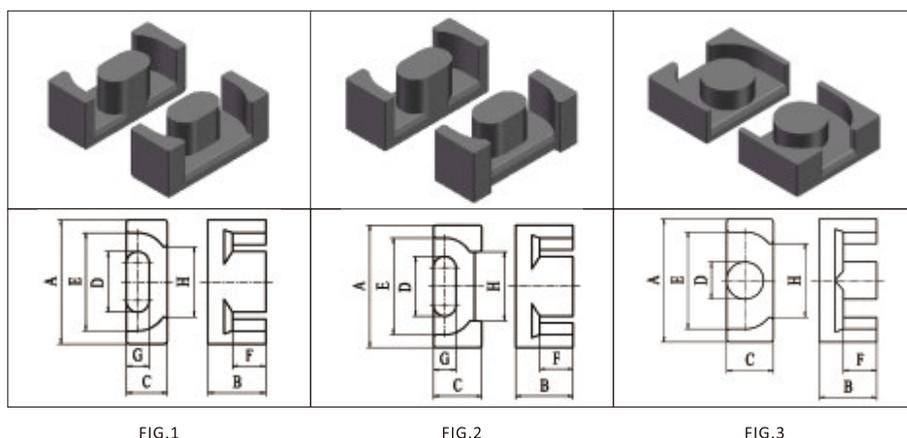

EPC 型 / EPC Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)							
		A	B	C	D	E	F	G	H
EPC17.6/17/6.1	2	17.6±0.3	8.5+0/-0.2	6.05±0.15	7.6±0.2	14.5min	6.05±0.2	2.8±0.1	12min
EPC17P	2	17.6±0.3	8.1±0.2	6±0.2	7.7±0.2	14.3min	5.6±0.2	2.8±0.1	11.5min
EPC17.7/10.8/12	8	17.7±0.25	5.4±0.12	12.8+0.15/-0.2	8.2+0.15/-0.2	14.7+0.25/-0.2	3+0.15/-0.07		12±0.25
EPC18.3/16.8/6.7	2	18.3±0.3	8.4±0.15	6.7±0.2	8.25±0.15	14min	5.45±0.15	4.3±0.15	13.6±0.3
EPC19	2	19.1±0.48	9.75±0.2	6±0.15	8.5±0.15	15.8min	7.25±0.2	2.5±0.1	
EPC19.1/8.5/16.6	8	19.1±0.3	4.27±0.1	16.6±0.25	10.24±0.15	16.45±0.3	2.37±0.15	2±0.1	12.8±0.3
EPC19.6/19.9/6	2	19.6±0.5	9.85+0.3/-0.1	6.0±0.2	8.2±0.2	16.4±0.5	7.35+0.3/-0	2.4±0.15	
EPC19.8/19.5/6A	2	19.8±0.48	9.75±0.2	6±0.15	8.5±0.15	16.5min	7.25±0.2	2.5±0.1	
EPC19/19.5/6C	2	19±0.3	16+0.4/-0.2	8.5±0.15	13.4+0.5/-0.2	2.5±0.1	6±0.15		
EPC20	1	20.0±0.3	8.8±0.2	5.6±0.15	9.0±0.15	15.1±0.25	6.3±0.15	3.3±0.1	13.0±0.25
EPC20.25A	1	20.25±0.3	10.25±0.15	8.8±0.2	8.95±0.15	15.45±0.3	7.55±0.2	5.5±0.15	13.35±0.3
EPC21.4/10.6/18.3	4	21.4±0.4	5.3±0.1	18.25±0.3	9.45±0.2	18.5±0.3	2.85±0.15		
EPC24.5/18.1/20.6	4	24.52±0.4	9.05±0.15	20.6±0.3	11.3±0.2	21.3±0.35	6.2±0.2		
EPC25/13.4/20	4	25±0.45	6.7±0.15	20±0.3	10±0.3	21.7min	4.2±0.15		
EPC25	2	25.1±0.5	12.5±0.2	8.0±0.2	11.5±0.2	20.65min	9.0±0.3	4.0±0.1	17.1min
EPC25/11/18	4	25±0.4	5.5±0.1	18±0.3	10.7±0.2	21.3±0.35	3.1±0.2		14±0.3
EPC25/23/7B	1	25.1±0.5	11.43±0.15	6.5±0.2	13.6±0.25	20.4min	8.78±0.15	2.5±0.15	16.5min
EPC26.5/16.4/20.2	12	26.5±0.4	8.2±0.2	20.2±0.3	12±0.2	21.3±0.4	4±0.15		
EPC26.6/11.4/23	8	26.6±0.6	5.7±0.15	23±0.35	12.7±0.3	22.2±0.5	2.7±0.2		
EPC27	2	27.1±0.5	16.0±0.2	8.0±0.2	13.0±0.3	21.6min	12.0±0.3	4.0±0.1	18.5min
EPC28.5/33.9/11.4	3	28.5±0.5	16.95±0.2	11.4±0.3	9.9±0.25	21.7±0.5	12.55±0.15		

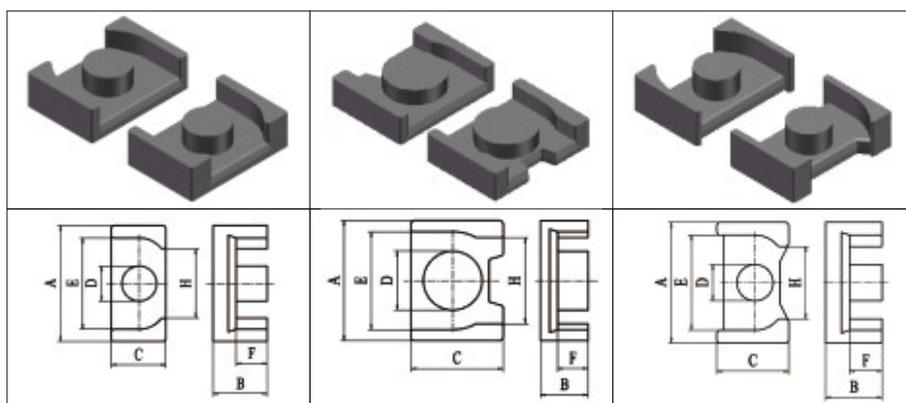


FIG.4

FIG.8

FIG.12

EPC 型 / EPC Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g /PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
EPC17.6/17/6.1	2	1.83	21.26	39.00	830.30	1060	1310	4.75
EPC17P	2	1.68	22.07	37.11	819.10	1110	1370	4.40
EPC17.7/10.8/12	8	0.57	47.00	28.00	1310.00	3240	3900	7.55
EPC18.3/16.8/6.7	2	1.34	27.94	37.31	1042.40	1300	1600	5.95
EPC19	2	2.06	21.82	44.91	980.00	1170	1460	5.80
EPC19.1/8.5/16.6	8	0.35	67.16	23.60	1584.90	4500	5400	8.80
EPC19.6/19.9/6	2	2.10	21.62	45.44	982.30	1070	1340	5.50
EPC19.8/19.5/6A	2	2.08	21.95	45.56	1000.00	1160	1440	5.20
EPC19/19.5/6C	2	2.03	22.7	46.1	1046.5	1088	1360	5.8
EPC20	1	1.45	27.36	39.73	1086.90		1830	5.70
EPC20.25A	1	1.09	42.09	45.72	1924.50	1920	2400	10.00
EPC21.4/10.6/18.3	4	0.31	80.39	24.8	1993.4	5828	6959	6.5
EPC24.5/18.1/20.6	4	0.30	107.50	32.32	3473.90	6200	7500	25.60
EPC25/13.4/20	4	0.32	90.85	29.12	2645.80	6190	7480	11.65
EPC25	2	1.32	43.01	56.84	2444.60	1710	2160	15.00
EPC25/11/18	4	0.37	84.76	31.76	2691.80	4000	4900	15.60
EPC25/23/7B	1	1.59	32.79	52.30	1715.00	1430	1810	9.97
EPC26.5/16.4/20.2	12	0.28	137.42	37.81	5195.90	6200	7700	28.34
EPC26.6/11.4/23	8	0.25	134.9	33.31	4493.0	8119	9917	12.4
EPC27	2	1.42	49.23	70.10	3451.00	1690	2160	22.40
EPC28.5/33.9/11.4	3	0.90	84.80	76.30	6470.20	2500	3200	33.21

*-Al为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of MnZn Ferrite Material

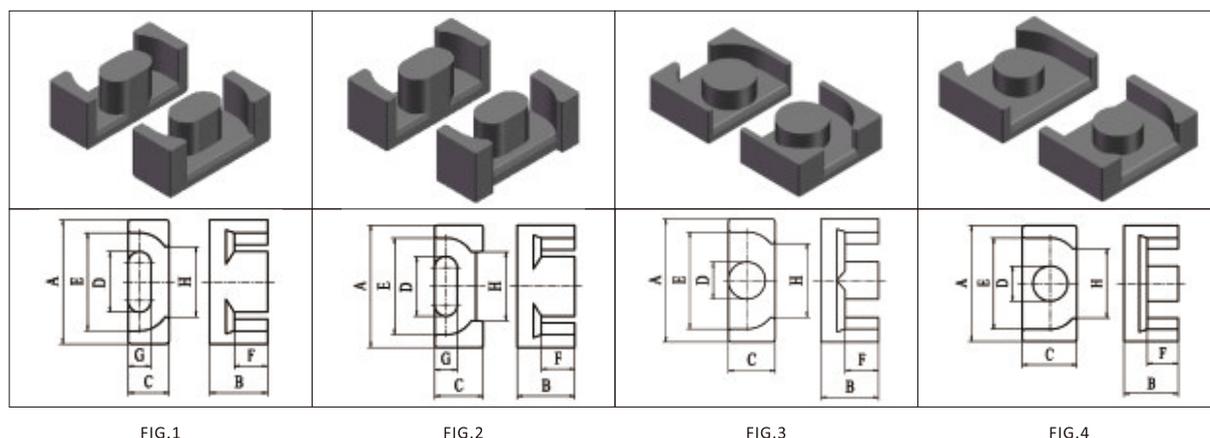


FIG.1

FIG.2

FIG.3

FIG.4

EPC 型 / EPC Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)							
		A	B	C	D	E	F	G	H
EPC29	2	28.6±0.5	16.9±0.25	12.4±0.25	12.0±0.25	23.2min	12.6±0.3	7.4±0.25	
EPC29.5/33.9/11.4	3	29.5±0.5	16.95±0.2	11.4±0.3	9.9±0.3	22.7±0.5	12.55±0.15		
EPC30	2	30.1±0.5	17.5±0.2	8.0±0.2	15.0±0.3	23.6min	13.0±0.3	4.0±0.1	20.0min
EPC31.8/30/17.6A	3	31.8±0.5	15±0.15	17.6±0.35	12±0.25	26.5±0.5	11.15±0.15/-0.125		17.5±0.5
EPC32/16.3/28	10	32±0.45	16.3±0.25/-0.15	28±0.35	12.55±0.2	24.55±0.45	7.3±0.4/-0.1	3.725±0.15	4.5±0.2
EPC32.6/15/28.8A	4	32.6±0.7	7.5±0.15	28.8±0.5	15.6±0.25	27.2±0.5	4.2±0.2		
EPC35.3/41.8/17.1	3	35.3±0.5	20.9±0.2	17.1±0.3	11.3±0.25	25.8±0.4	15.4±0.2		21.2±0.45
EPC37/39.6/12	6	37±0.5	19.8±0.2	12±0.3	16±0.4	28.7±0.5	14±0.2	7±0.3	25.5±0.5
EPC39A	1	39±0.7	19.6±0.2	15.5±0.3	17.6±0.3	31.4±0.7	14.1±0.2	9.7±0.2	24.7min
EPC39/50.2/17	7	39±0.6	25.1±0.25	17±0.35	14.5±0.25	29.5min	20±0.25	11.2±0.25	25.4min
EPC40.5/26.3/12A	6	40.5±0.6	23.15±0.2	12±0.3	18±0.3	31±0.6	16.15±0.25	7.5±0.25	26.3min
EPC43/34/28	10	43±0.7	17±0.15	28±0.5	12.5±0.2	35.4±0.7	12.5±0.2		
EPC45.5/51.2/16	7	45.5±0.6	25.6±0.2	16±0.25	20.9±0.3	34.15±0.6	19.1±0.3	10±0.2	27±0.6
EPC46.5	2	46.5±0.5	22.2±0.2	19.3±0.3	20.8±0.3	37.5±0.5	15.5±0.2	11.8±0.2	30.2±0.5
EPC48/55/17.6	7	48±0.7	27.5±0.2	17.6±0.3	20.6±0.4	36min	20.5±0.3	9.7±0.3	30min
EPC51/58/25	1	51±0.7	29±0.25	25±0.4	20±0.4	43.8±0.7	22±0.3		
EPC54.5	1	54.5±0.7	27.2±0.4	21.5±0.2	26.5±0.3	43.5±0.7	19.2±0.3	14±0.2	35±0.7
EPC57.8/37.5/38	4	57.8±1.1	18.75±0.15	38±0.7	25±0.35	47.8±0.9	12.35±0.2		
EPC58.7/71.4/16.2A	7	58.7±0.7	35.7±0.2	16.2±0.35	29.3±0.45	45min	26.7±0.2		

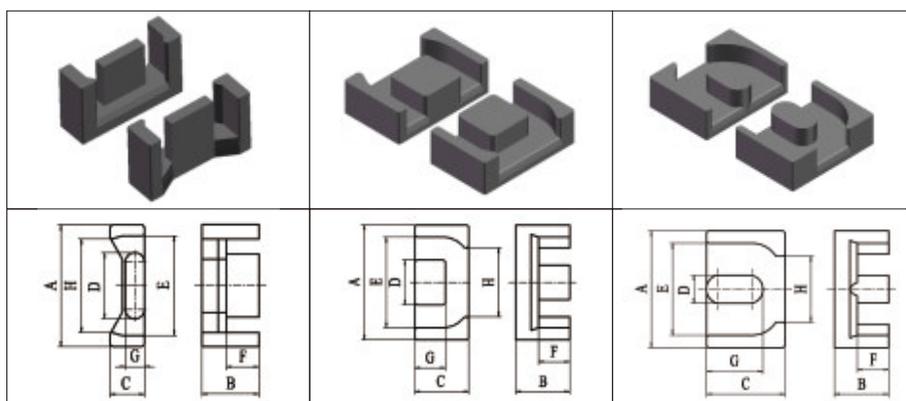


FIG.6

FIG.7

FIG.10

EPC 型 / EPC Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g / PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
EPC29	2	0.89	83.03	74.16	6157.70	2550	3290	35.50
EPC29.5/33.9/11.4	3	0.90	84.60	76.18	6444.50	2500	3200	33.70
EPC30	2	1.31	57.67	75.58	4358.60	1850	2380	23.00
EPC31.8/30/17.6A	3	0.59	122.30	72.60	8879.00	3800	4900	46.20
EPC32/16.3/28	10	0.17	250.01	42.97	10741.70	12200	15200	56.20
EPC32.6/15/28.8A	4	0.23	196.00	45.30	8878.80	9200	11500	46.00
EPC35.3/41.8/17.1	3	0.67	129.50	86.28	11173.40	2900	3800	72.50
EPC37/39.6/12	6	0.82	106.40	86.97	9253.20	2950	3820	48.00
EPC39A	1	0.60	147.50	87.85	12958.30	4020	5220	72.00
EPC39/50.2/17	7	0.70	163.32	113.59	18551.50	3700	4900	94.80
EPC40.5/26.3/12A	6	0.76	128.93	98.20	12661.20	3220	4200	64.46
EPC43/34/28	10	0.40	241.0	95.5	23015.5	6472	8426	10.6
EPC45.5/51.2/16	7	0.55	206.20	114.02	23510.10	4700	6100	120.20
EPC46.5	2	0.46	216.31	100.16	21665.20	5330	6950	121.00
EPC48/55/17.6	7	0.57	215.66	123.28	26587.00	4200	5500	139.60
EPC51/58/25	1	0.51	263.5	133.33	35132.5	5293	6985	198.22
EPC54.5	1	0.39	305.05	119.03	36309.80	6270	8250	202.00
EPC57.8/37.5/38	4	0.20	486.00	97.00	47142.00	12700	16600	249.20
EPC58.7/71.4/16.2A	7	0.66	229.95	152.4	35044.4	4099	5433	201.8

*-Al为磁心对应参考值,具体规格以双方签订认证书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订认证书为准。