

锰锌氧铁材料规格尺寸 Specification and Dimensions of MnZn Ferrite Material

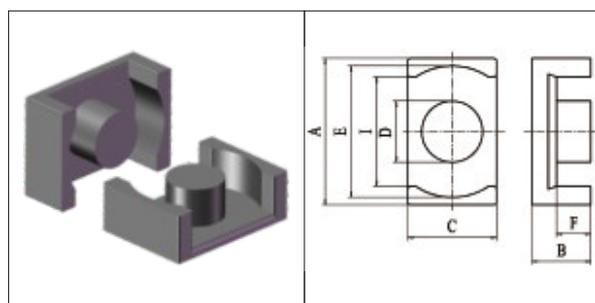


FIG.1

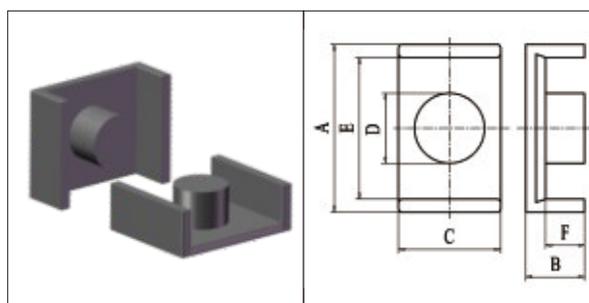


FIG.2

ER 型 / ER Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)						
		A	B	C	D	E	F	I
ER6.7/5/3.9	1	6.7±0.2	2.5±0.1	3.9±0.15	2.4±0.1	5.7±0.2	1.7±0.15	5.3min
ER7.5/5/4B	1	7.5±0.15	2.55±0.1	4.0±0.1	2.6±0.1	6.1±0.25	1.725±0.1	
ER9.5/5/5S	1	9.35±0.2	2.45±0.05	4.9±0.1	3.4±0.1	7.65±0.15	1.675±0.1	7.0min
ER10.8/5.1/5.9B	1	10.8±0.2	2.55±0.05	5.9±0.15	4.15±0.15	8.85±0.2	1.58±0.1	7.9min
ER11/5/6J	1	10.8±0.2	2.45±0.05	5.9±0.15	4.15±0.15	8.85±0.15	1.575±0.1	7.9MIN
ER12.4/5/5	1	12.4±0.3	2.5±0.1	5±0.15	3.4±0.1	10.4min	1.6±0.15	
ER12.4/8/5	1	12.4±0.3	4±0.1	5±0.15	3.4±0.1	10.4min	3.14±0.15	
ER12.7/6/6.1	1	12.7±0.3	3±0.1	6.1±0.2	4.1±0.18	10.3±0.3	1.95±0.15/-0.1	9±0.3
ER12.8/6.4/8.7A	1	12.8±0.3	3.2±0.1	8.7±0.25	5±0.15	11.2±0.3	2.2±0.1	9.05±0.3
ER13/6/9A	1	12.8±0.3	2.85±0.075	8.7±0.25	5.0±0.15	11.2±0.3	1.75±0.125	9.05±0.3
ER14.5/6/7	2	14.5±0.2	2.95±0.1	6.7±0.1	4.7±0.1	11.8±0.2	1.65±0.1	
ER14.5/7.6/9.2	1	14.5±0.3	3.8±0.15	9.2±0.2	5.8±0.15	12.2±0.3	1.9±0.15	9.2min
ER14.6/8.5/9.3	1	14.6±0.25	4.25±0.1	9.4±0/-0.3	6±0/-0.2	12.15min	2.45±0.15	
ER15.2/6.2/6.7	2	15±0.4/-0.1	3.1±0.1	6.7±0.2	4.7±0.2	12.3±0.4/-0.1	1.8±0.15	
ER16.8/8.8/11.3C	6	16.8±0.25	4.4±0.1	11.3±0.2	8±0.15	13.7±0.25	2.2±0.15	11.6±0.25
ER18/6/10A	1	18±0.35	3.15±0.1	9.7±0.2	6.2±0.15	15.15min	1.7±0.15	
ER18/7.8/13C	1	18±0.35	3.9±0.15	13±0.2	7.2±0.15	16±0.35	2.5±0.15	13.8±0.1
ER18.5/9.6/12	2	18.5±0.4	4.8±0.15	12±0.3	6.2±0.2	15.15min	2.3±0.15	
ER18.6/10/14	2	18.6±0.4	5±0.1	14.6±0.3	6.5±0.1	16.3±0.3	3.8±0.15	
ER18.9/9.4/5.7A	1	18.9±0.25	4.7±0.1	5.7±0.15	5.7±0.15	14.9±0.25	1.8±0.15	13.7min
ER19.3/23.4/14.6A	1	19.3±0.35	11.68±0.08	14.6±0.35	7.62±0.15	16.76±0.35/-0.3	9.88±0.15	

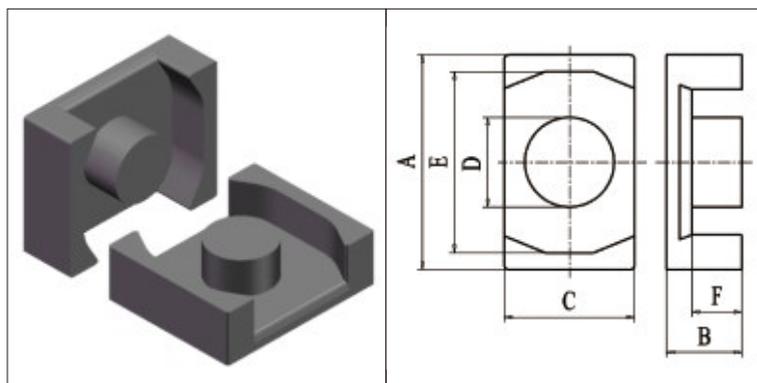


FIG.6

ER 型 / ER Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g /PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
ER6.7/5/3.9	1	2.29	5.32	12.16	64.70	500	500	0.35
ER7.5/5/4B	1	2.04	6.24	12.72	79.40	670	795	0.42
ER9.5/5/5S	1	1.67	8.47	14.20	120.00	900	1200	0.82
ER10.8/5.1/5.9B	1	1.09	13.21	14.33	189.3	1200	1400	0.475
ER11/5/6J	1	1.12	12.58	14.05	176.80	1250	1450	0.95
ER12.4/5/5	1	1.78	9.43	16.79	158.3	800	940	0.4
ER12.4/8/5	1	2.43	9.36	22.77	213.1	700	850	0.55
ER12.7/6/6.1	1	1.25	14.10	17.69	249.40	1850	2300	1.30
ER12.8/6.4/8.7A	1	0.89	20.23	17.91	362.30	1850	2300	1.80
ER13/6/9A	1	0.78	20.85	16.36	341.10	1900	2200	1.80
ER14.5/6/7	2	0.98	18.44	18.12	334.10	1500	1750	2.11
ER14.5/7.6/9.2	1	0.61	31.05	19	590.1	2600	3000	1.45
ER14.6/8.5/9.3	1	0.52	31.16	16.35	509.30	2490	2870	1.95
ER15.2/6.2/6.7	2	1.15	17.55	20.25	355.3	1400	1650	0.94
ER16.8/8.8/11.3C	6	0.40	51.77	20.92	1082.90	4000	4700	6.00
ER18/6/10A	1	0.70	30.11	21.00	632.40	2400	3000	3.46
ER18/7.8/13C	1	0.54	41.69	22.67	945.2	3100	3700	2.8
ER18.5/9.6/12	2	0.46	31.81	29.35	933.5	2000	2500	2.6
ER18.6/10/14	2	1.04	33.64	34.92	1175.0	1900	2400	3.05
ER18.9/9.4/5.7A	1	0.86	28.60	24.50	700.70	1500	1800	3.74
ER19.3/23.4/14.6A	1	0.95	53.85	51.10	2751.80	2030	2550	15.00

*-Al为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of MnZn Ferrite Material

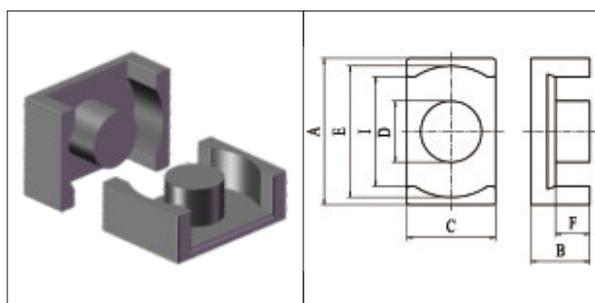


FIG.1

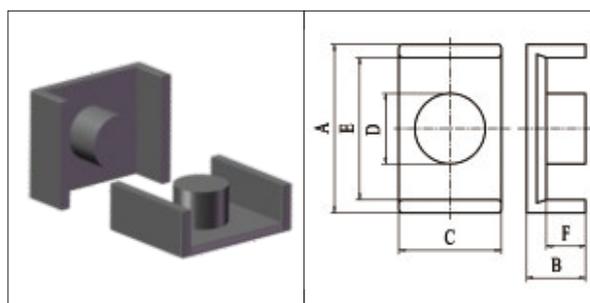


FIG.2

ER 型 / ER Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)						
		A	B	C	D	E	F	I
ER19.3/8/15B	1	19.3±0.35	4.19±0.08	14.6±0.35	7.62±0.15	16.76±0.25	2.24min	
ER19/10/15A	1	19.3±0.35	4.83±0.08	14.6±0.35	7.62±0.15	16.76±0.25	2.88min	15.5±0.25
ER19.4/14.2/7.2	1	19.4±0.35	7.1±0.15	7.2±0.2	6.8±0.2	15.2±0.35	4.4±0.15	13.7min
ER19.8/11.5/16A	1	19.8±0.3	5.75±0.1	16±0.2	10.5±0.15	17min	3.25±0.15	11.3min
ER19.8/8.4/14	1	19.75±0.35	4.2±0.1	14±0.3	8.8±0.15	17±0.35	2.2±0.15	12.86±0.35
ER19.8/8.2/14	1	19.8±0.3	4.1±0.1	14±0.3	8.8±0.15	17.6±0.3	2.1±0.15	12.46±0.35
ER20/10/11	2	20±0.3	4.75±0.1	11±0.2	8.8±0.15	15±0.3	2.35±0.15	
ER20/10/14	1	20.0±0.35	5.1±0.1	14.0±0.3	8.8±0.15	18.0±0.35	2.9±0.15	12.86±0.35
ER20/10.2/11.8A	1	20±0.3	5.1±0.1	11.8±0.25	7±0.15	17.8±0.3	2.2±0.15	14.5min
ER20/11.4/14	1	20±0.35	5.7±0.15	14±0.3	8.8±0.2	18±0.35	3.5±0.2	12.86±0.35
ER20/13/14A	1	20.0±0.35	6.3±0.15	14.0±0.3	8.8±0.2	18.0±0.35	4.1±0.2	12.86±0.35
ER20/8.3/14B	1	20±0.35	4.15±0.1	14±0.3	8.8±0.15	18±0.35	1.95±0.15	12.86±0.35
ER20/12.6/14H	1	20±0.3	6.3±0.1	14±0.25	8.8±0.15	18.0±0.35	4.1±0.15	
ER20/6/10	2	20±0.35	3±0.1	10±0.2	6.2±0.2	17±0.3	1.65±0.15	
ER20.6/9/10	3	20.6±0.4	4.6±0.4/-0	10±0.2	8+0/-0.4	17±0.4	2.6±0.4/-0	
ER20.7/13.3/18.2C	1	20.68±0.25	6.67±0.1	18.21±0.25	10.5±0.2	18.28±0.25	3.82±0.15	13.02±0.25
ER21.4/16.2/14	1	21.4±0.4	8.1±0.15	14±0.25	9±0.2	17.7min	5.6±0.15	13.5min
ER21.4/22.2/16.4	1	21.4±0.4	11.1±0.15	16.4±0.3	10±0.2	18.4±0.4	8.7±0.15	14.8±0.4
ER22.6/12.8/14A	1	22.6±0.4	6.4±0.1	14±0.3	8.8±0.2	19.7min	4.2±0.2	15.5min
ER23/9.2/12.5	1	23±0.3	4.6±0.1	12.5±0.25	8±0.2	20.2±0.3	2.6±0.1	
ER23.2/10.4/12.5A	1	23.2±0.45	5.2±0.1	12.5±0.25	8±0.2	20.2±0.4	3.2±0.1	

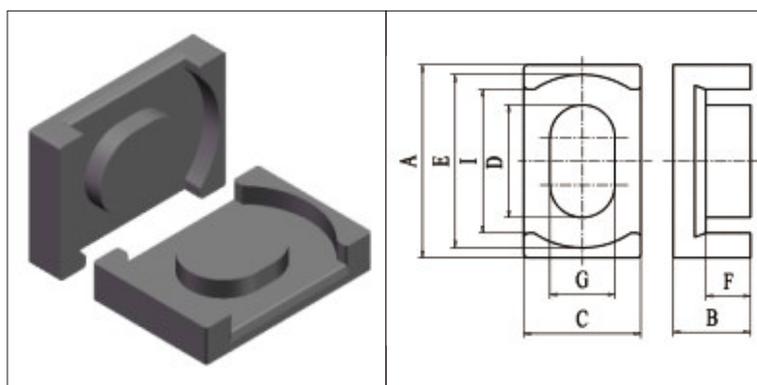


FIG.3

ER 型 / ER Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g / PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
ER19.3/8/15B	1	0.57	50.97	29.21	1540.00	3480	4040	8.00
ER19/10/15A	1	0.48	52.95	25.45	1610.00	3260	3890	8.00
ER19.4/14.2/7.2	1	0.95	36.30	34.50	1252.40	2100	2600	6.56
ER19.8/11.5/16A	1	0.3	85.9	26.2	2250.6	6000	7200	6.5
ER19.8/8.4/14	1	0.30	61.21	18.45	1129.20	4800	5600	7.92
ER19.8/8.2/14	1	0.32	58.44	18.81	1099.00	4700	5500	7.60
ER20/10/11	2	0.46	55.54	25.39	1410.30	3770	4520	7.40
ER20/10/14	1	0.45	59.45	26.90	1599.10	3900	4680	8.50
ER20/10.2/11.8A	1	0.52	49.09	25.72	1262.6	3400	4100	4.24
ER20/11.4/14	1	0.49	59.37	29.30	1739.20	3690	4470	9.80
ER20/13/14A	1	0.53	59.30	31.69	1879.30	3510	4270	9.93
ER20/8.3/14B	1	0.32	59.86	19.21	1150.10	4730	5530	8.00
ER20/12.6/14H	1	0.53	59.30	31.69	1879.30	3500	4300	10.42
ER20/6/10	2	0.84	28.16	23.55	663.20	2000	2400	4.00
ER20.6/9/10	3	0.67	41.67	27.75	1156.40	2710	3260	6.00
ER20.7/13.3/18.2C	1	0.28	99.6	27.9	2778.8	6700	8000	8.7
ER21.4/16.2/14	1	0.55	69.25	38.43	2661.70	3470	4290	14.30
ER21.4/22.2/16.4	1	0.58	85.17	49.14	4185.60	3600	4500	21.14
ER22.6/12.8/14A	1	0.57	60.73	34.74	2109.8	3500	4350	5.65
ER23/9.2/12.5	1	0.57	50.65	29.11	1474.30	3300	4000	8.00
ER23.2/10.4/12.5A	1	0.61	51.32	31.56	1619.50	3120	3790	5.43

*-Al为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of MnZn Ferrite Material

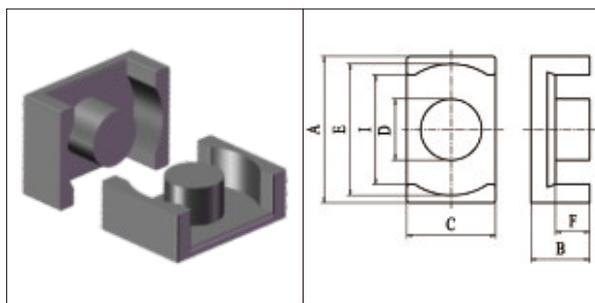


FIG.1

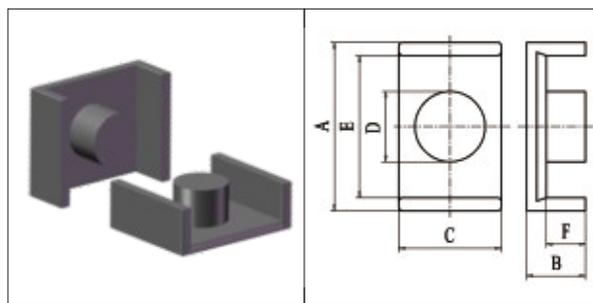


FIG.2

ER 型 / ER Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)						
		A	B	C	D	E	F	I
ER23.2/10.4/12.5E	1	23.2±0.45	5.2±0.15	12.5±0.25	8±0.2	20.2±0.4	3.2±0.15	
ER24.5/8.8/24	5	24.5±0.4	4.4±0.1	24±0.4	9.8±0.25	20.5±0.4	2.4±0.15	13.6min
ER25/10/18	1	25±0.4	4.9±0.1	18±0.3	11±0.2	22±0.4	2.05±0.15	
ER25/10.5/11	1	25±0.5	5.25±0.15	11±0.2	9.5±0.2	19.1min	2.05±0.2	
ER25/10.8/18A	1	25±0.4	5.4±0.15	18±0.3	11±0.2	22±0.4	3.35±0.15	
ER25/11/18A	1	25±0.4	5.6±0.1	18±0.3	11±0.2	22±0.4	3.2±0.15	
ER25/11.4/14.8	1	25±0.5	5.7±0.15	14.8±0.3	9.4±0.2	21.7±0.4	3.3±0.2	
ER25/12.6/18	1	25±0.4	6.2±0.225/-0.125	18±0.3	11±0.2	22±0.4	3.35±0.15	14.5min
ER25/16/18A	1	25.0±0.4	8±0.2	18.0±0.3	11.0±0.2	22.0±0.4	5.15±0.15	
ER25/9/20H	4	25.0±0.3	4.62±0.1	20±0.25	9.8±0.15	21.2±0.25	2.72±0.1	4.22±0.15
ER25/14.6/20	1	25±0.4	7.3±0.15	20±0.3	10.3±0.2	22.82±0.4	4.45±0.15	19.52±0.4
ER25/9.8/20	1	25±0.4	9.8±0.3	20±0.3		10.3±0.2	5.62±0.3	
ER25.1/17.7/20	2	25.1±0.35	8.85±0.1	20±0.25	9.8±0.15	21.3±0.3	5.25±0.1	
ER25.4/10.5/10B	1	25.4±0.4	5.25±0.1	10±0.15	8.3±0.15	18.6±0.4	3.15±0.15	
ER25.4/10/10	1	25.4±0.4	5.15±0.1	10±0.15	8.3±0.15	18.6±0.4	3.05±0.15	
ER25.4/14/19	2	25.4±0.5	7±0.15	19±0.35	10±0.2/-0.3	20.4±0.4	4.6±0.1	
ERX25.5/9.3/7.5	5	25.5±0.35	4.65±0.15	7.5±0.2	7.5±0.2	19.8min	1.85±0.15	
ER26/9.2/19	1	26±0.4	4.6±0.08	19±0.3	10±0.2	23±0.4	2.2±0.15	20min
ER26.5/14.7/19	1	26.5±0.4	7.35±0.1	19±0.4	13.2±0.2	21.5±0.4	3.75±0.15	17.4±0.4
ER26.7/7.6/26.7	6	26.7±0.5	3.8±0.1	26.7±0.5	13±0.2	24.5±0.5	1.8±0.1	
ER26.8/16.8/19.5	1	26.8±0.4	8.25±0.3/-0	19.45±0.3	13.2±0.15	21.8±0.35	4.75±0.15	17.7±0.4

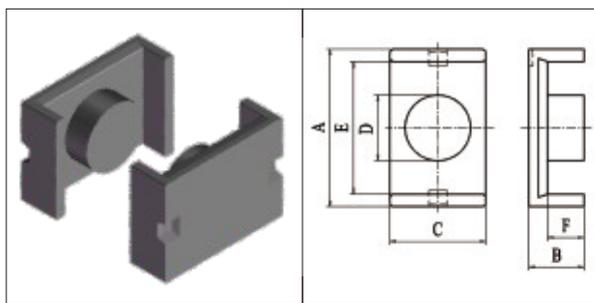


FIG.4

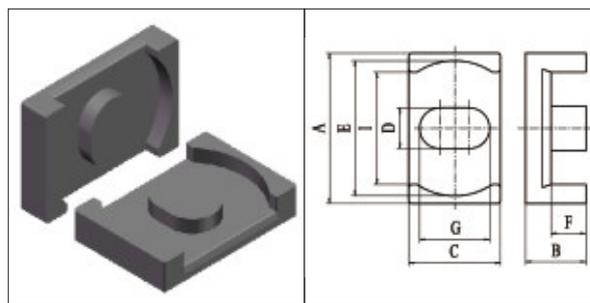


FIG.5

ER 型 / ER Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g /PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
ER23.2/10.4/12.5E	1	0.61	51.32	31.56	1619.5	3200	3900	4.25
ER24.5/8.8/24	5	0.29	98.32	28.64	2815.60	6370	7690	14.50
ER25/10/18	1	0.27	100.74	26.87	2706.90	6560	7890	15.60
ER25/10.5/11	1	0.41	70.1	28.9	2025.9	4600	5500	6.23
ER25/10.8/18A	1	0.34	90.33	30.59	2763.20	4700	5700	15.00
ER25/11/18A	1	0.32	95.08	30.71	2919.90	5480	6660	16.40
ER25/11.4/14.8	1	0.46	71.88	32.96	2369.30	4210	5130	6.30
ER25/12.6/18	1	0.32	101.36	32.18	3261.40	5850	7130	18.40
ER25/16/18A	1	0.39	100.25	39.24	3934.00	5110	6320	21.50
ER25/9/20H	4	0.41	75.85	31.34	2377.40	4730	5750	13.00
ER25/14.6/20	1	0.42	92.49	38.64	3573.40	4500	5600	20.66
ER25/9.8/20	1	0.31	91.84	28.50	2617.40	5500	6700	14.50
ER25.1/17.7/20	2	0.46	89.40	41.49	3709.10	3900	4800	24.88
ER25.4/10.5/10B	1	0.59	51.43	30.52	1569.40	2680	3250	9.07
ER25.4/10/10	1	0.59	51.00	30.00	1547.00	2710	3280	9.00
ER25.4/14/19	2	0.45	86.95	39.00	3391.10	4200	5190	18.00
ERX25.5/9.3/7.5	5	0.69	42.82	29.55	1265.50	2700	3300	7.12
ER26/9.2/19	1	0.35	86.77	30.38	2635.6	5500	6700	7.75
ER26.5/14.7/19	1	0.23	144.47	33.26	4804.50	8200	10100	25.20
ER26.7/7.6/26.7	6	0.29	92.03	26.63	2450.80	4100	4900	14.00
ER26.8/16.8/19.5	1	0.26	146.62	37.74	5533.9	8100	10000	15.12

*-Al为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of MnZn Ferrite Material

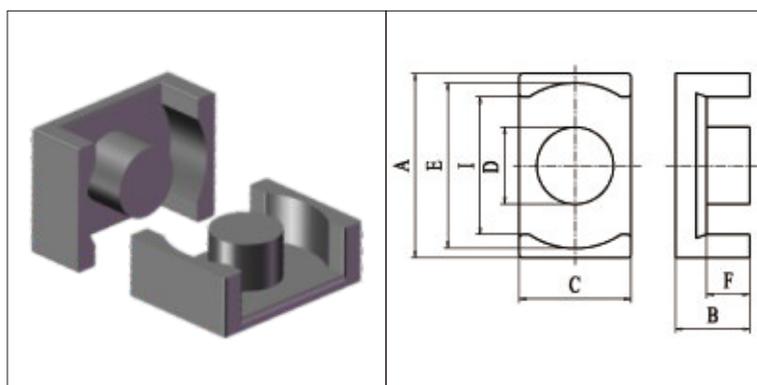


FIG.1

ER 型 / ER Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)						
		A	B	C	D	E	F	I
ER27.6/12.3/19A	2	27.6±0.3	6.15±0.15	19±0.3	12±0.2	21.6±0.2	3.15±0.15	
ER28/10/20A	1	28±0.4	5±0.15	20±0.3	11.2±0.2	25.5±0.4	2.4±0.15	20±0.4
ER28/10/23.7A	1	28±0.4	5±0.1	23.7±0.3	13±0.2	25.5±0.4	2.2±0.15	20±0.4
ER28/20/21.2	2	28±0.5	10±0.1	21.2±0.4	11.4±0.2	23±0.4	7.15±0.15	
ER30/9.3/9.5	2	30±0.45	4.65±0.1	9.5±0.2	7.8±0.2	24±0.4	1.85±0.15	
ER30/12/20F	1	30±0.4	6±0.15	20±0.3	13±0.2	24±0.4	3.2±0.2	19.45±0.4
ER30/13/20C	1	30±0.4	6.7±0.2	20±0.3	11±0.2	26±0.4	4±0.2	19.6min
ER30/16/20E	1	30.0±0.5	8.3±0.25	20.0±0.4	11.0±0.2	25.6min	5.7±0.2	
ER30/16/20V	1	30±0.4	8±0.15	20±0.3	11.0±0.2	26±0.4	5.3±0.2	
ER30/16.6/23	1	30.0±0.5	8.3±0.1	23±0.4	14.6±0.25	25.2±0.5	4.95±0.15	19.5min
ER30/16.8/24A	1	30±0.4	8.4±0.15	24±0.3	15.3±0.15	25.2±0.4	4.4±0.15	18±0.4
ER30/19/20N	1	30.3±0.5	9.6±0.15	20.3±0.3	13.3±0.2	25.7±0.4	6.6±0.2	21min
ER30/40/23B	1	30±0.5	20±0.15	23±0.4	13.3±0.25	26.5±0.5	16.5±0.15	18±0.3
ER30.3/19.2/20.3	1	30.3±0.5	9.6±0.15	20.3±0.3	13.2±0.3/-0.2	25.7±0.4	6.8±0.2	21min
ER30.5/16.6/23	1	30.5±0.5	8.3±0.1	23±0.4	14.6±0.25	25.7±0.5	4.95±0.15	20min
ER31/11.4/15.6B	1	31±0.45	5.7±0.1	15.6±0.3	12±0.2	25.4±0.45	2.2±0.15	
ER31.5/12.7/20.3	1	31.5±0.5	6.35±0.15	20.3±0.3	13.3±0.2	26.5min	3.4±0.25/-0.05	20.2min
ER32/11.4/21	1	32±0.6	5.7±0.1	21±0.4	11.2±0.2	29.7±0.5	2.7±0.1	
ER32/23.6/25.4A	2	32±0.5	11.81±0.15	25.4±0.4	12.2±0.2	27.2±0.5	8.81±0.15	
ER33.2/10.4/23.7A	1	33.2±0.5	5.2±0.2	23.7±0.3	12.6±0.2	29.3±0.5	3.1±0.2	21.1±0.5
ER32.2/14.4/22A	1	32.2±0.5	7.22±0.125	22±0.3	11±0.15	29±0.4	2.3±0.15	23±0.4

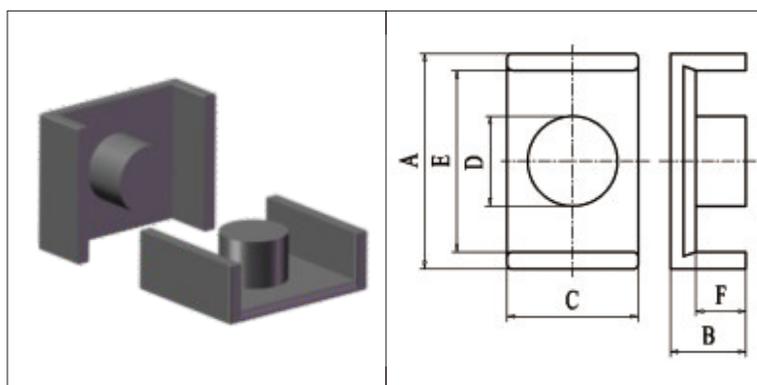


FIG.2

ER 型 / ER Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g /PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
ER27.6/12.3/19A	2	0.31	113.73	34.89	3967.50	6600	8100	21.88
ER28/10/20A	1	0.30	103.72	30.95	3209.60	6200	7600	18.40
ER28/10/23.7A	1	0.24	129.33	31.19	4034.1	8000	9800	11.6
ER28/20/21.2	2	0.47	108.78	51.78	5632.3	4700	6000	15.5
ER30/9.3/9.5	2	0.65	52.56	33.92	1783	3100	3800	4.81
ER30/12/20F	1	0.23	139.69	32.48	4537.60	6900	8400	25.33
ER30/13/20C	1	0.35	109.90	38.15	4192.70	5220	6430	24.00
ER30/16/20E	1	0.41	108.02	44.73	4831.20	4660	5810	27.90
ER30/16/20V	1	0.39	109.76	43.18	4739.90	4780	5950	27.00
ER30/16.6/23	1	0.26	154.1	39.31	7088.4	8200	10200	17.75
ER30/16.8/24A	1	0.18	202.59	36.98	7491.6	11000	14000	22.1
ER30/19/20N	1	0.43	130.70	55.90	7306.00	5020	6350	33.70
ER30/40/23B	1	0.57	152.90	87.18	13330.40	4000	5200	73.36
ER30.3/19.2/20.3	1	0.35	136.35	48.40	6598.40	5260	6590	33.70
ER30.5/16.6/23	1	0.22	177.68	40.0	7107.6	9400	11000	19.3
ER31/11.4/15.6B	1	0.3	111.36	33.69	3751.5	6600	8100	10.65
ER31.5/12.7/20.3	1	0.28	132.64	36.79	4879.20	6510	8010	27.05
ER32/11.4/21	1	0.33	112.11	36.98	4145.30	5520	6800	24.60
ER32/23.6/25.4A	2	0.48	127.80	61.92	7913.50	4480	5700	42.66
ER33.2/10.4/23.7A	1	0.27	124.26	34.37	99.54	7300	3900	12.5
ER32.2/14.4/22A	1	0.38	109.88	42.80	4702.90	4940	6140	27.27

*-Al为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of MnZn Ferrite Material

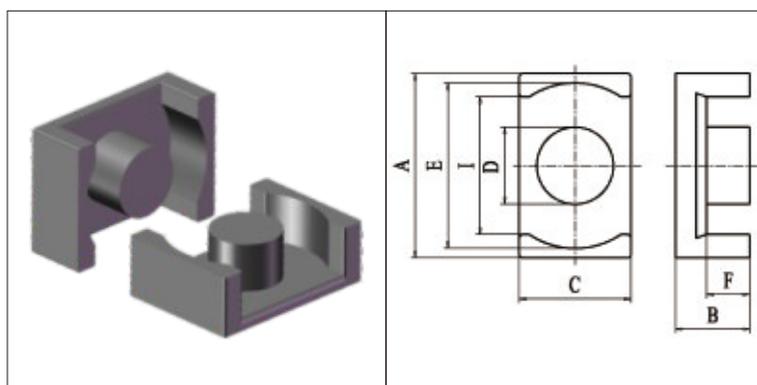


FIG.1

ER 型 / ER Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)						
		A	B	C	D	E	F	I
ER32.2/16/23E	1	32.2±0.5	8±0.15	23±0.4	13±0.2	29±0.5	5.2±0.2	
ER34.2/9.3/10.8A	1	34.2±0.5	4.65±0.15	10.8±0.3	10.8±0.3	25.6min	2.45±0.15	
ER35.2/17.9/12.5	2	35.2±0.5	8.95±0.25	12.5±0.35	12±0.3	27.7±0.5	5.2±0.25	
ER35.5/20/24	1	35.5±0.4	10±0.15	24±0.25	15±0.15	30.6±0.4	6.65±0.15	22±0.4
ER36/19.3/20.3	1	36±0.6	9.65±0.2	20.3±0.3	13.3±0.3	31±0.6	6.65±0.2	
ER38.1/16/25	1	38.1±0.7	8±0.15	25.4±0.5	14±0.2	33.1±0.6	5.3±0.2	24.76±0.5
ER40/12.6/28.4A	1	40±0.5	6.3±0.2	28.4±0.35	16±0.25	35±0.5	3.3±0.2	
ER40/13.2/28.4	1	40±0.5	6.6±0.2	28.4±0.35	14±0.2	36.2±0.5	3.9±0.2	29.2±0.5
ER40/14.5/26	1	40±0.5	7.25±0.2	26±0.35	14±0.25	36.2±0.5	4.55±0.15	31.2±0.5
ER40.6/50/32	1	40.64±0.8	25±0.1	32±0.6	16±0.3	34.04±0.7	21.0±0.2	
ER46.6/24.1/27.2	2	46.6±0.9	12.1±0.15	27.2±0.5	17.3±0.3	37.9±0.8	7.7±0.15	
ER47.3/24/28	2	47.3±0.8	12±0.2	28±0.5	17.5±0.35	37±0.5	7±0.2	
ER50/47/40E	1	50±0.8	23.5±0.2	40±0.8	26.4±0.5	42.5±0.8	15.7±0.3	29.8±0.5
ER50/19/38	2	50.2±0.81	9.5±0.15	38.1±0.6	19.8±0.25	41.7min	4min	
ER51/34/38.1	2	51±1	17±0.15	38.1±0.7	20±0.4	41.8±0.8	11.79±0.15	
ER53.4/31/21.5A	1	53.4±0.6	15.3±0.2	21.5±0.3	20.3+0/-0.6	38.7min	8.3+0.5/-0	
ER62.4/38.5/31	2	62.4±1	19.25±0.1	31±0.7	20±0.35	51.8±0.9	13.65±0.3	
ER64/25.4/50.8A	2	64±1	12.7±0.2	50.8±1	25.4±0.5	53.5±1	6.25±0.25	
ER64/33/50.8	2	64±1	16.5±0.2	50.8±1	25.4±0.5	53.5±1	4.2±0.25	

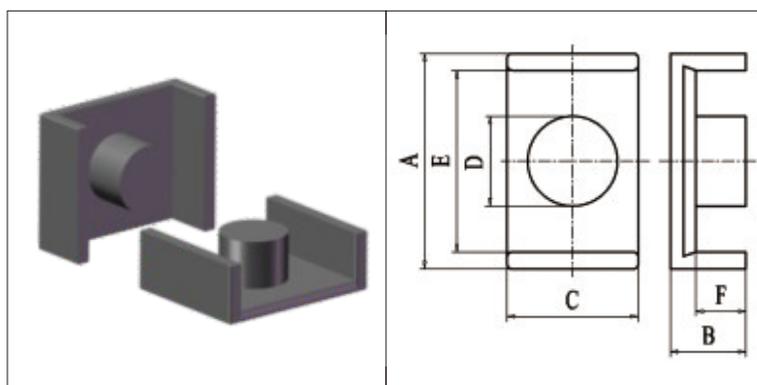


FIG.2

ER 型 / ER Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g / PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
ER32.2/16/23E	1	0.32	137.43	44.6	6129.4	6700	8400	16.96
ER34.2/9.3/10.8A	1	0.56	59.36	33.53	1990.60	2800	3500	12.14
ER35.2/17.9/12.5	2	0.52	98.22	50.68	4977.60	4190	5270	25.50
ER35.5/20/24	1	0.22	179.73	52.27	9393.80	8790	10850	39.35
ER36/19.3/20.3	1	0.40	135.21	54.37	7350.80	5160	6520	38.00
ER38.1/16/25	1	0.30	161.35	47.89	7727.50	6390	8010	43.69
ER40/12.6/28.4A	1	0.20	203.06	40.85	8294.60	8910	11050	46.60
ER40/13.2/28.4	1	0.26	168.93	44.59	7532.60	7500	9400	45.80
ER40/14.5/26	1	0.31	155.12	48.53	7527.7	7100	9000	21.83
ER40.6/50/32	1	0.55	213.33	118.04	25181.90	4500	5900	131.64
ER46.6/24.1/27.2	2	0.34	237.40	79.70	18920.80	7300	9500	87.60
ER47.3/24/28	2	0.25	267.99	67.26	18026.10	8600	11000	99.02
ER50/47/40E	1	0.17	581.05	97.22	56490.3	12000	15000	158.1
ER50/19/38	2	0.17	347.40	59.20	20580.00	11630	14760	100.00
ER51/34/38.1	2	0.26	349.93	89.47	31308.90	8900	11600	156.34
ER53.4/31/21.5A	1	0.24	313.94	76.55	24031.20	9380	12080	125.00
ER62.4/38.5/31	2	0.36	331.00	119.00	39389.00	7000	9200	186.82
ER64/25.4/50.8A	2	0.14	578.86	78.51	45444.00	16030	20680	256.00
ER64/33/50.8	2	0.09	755.37	71.62	54096.60	17300	22200	424.50

*-Al为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N²

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。