

锰锌氧铁材料规格尺寸 Specification and Dimensions of **MnZn** Ferrtie Material

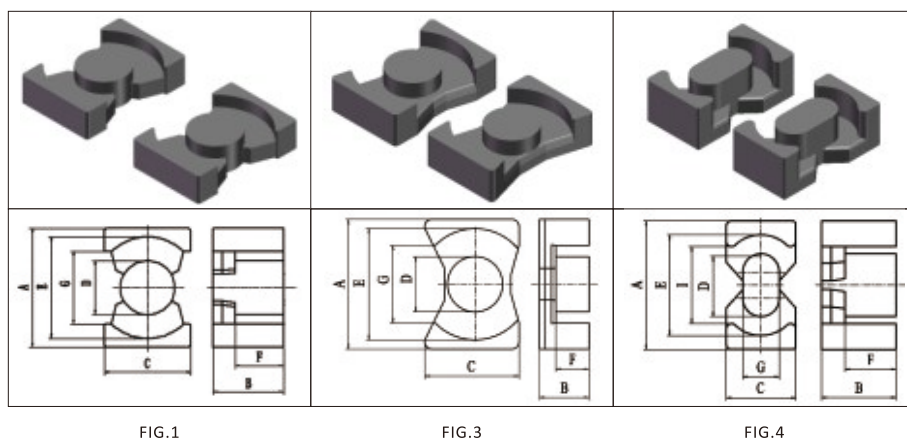


FIG.1

FIG.3

FIG.4

PQ 型 / PQ Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)						
		A	B	C	D	E	F	G
PQ15.5/8/10	9	15.51±0.25	3.98±0.05	9.96±0.25	6.3±0.1	13.1±0.25	1.96±0.15	1.205±0.15
PQ16.4/11.6/11.2A	1	16.4±0.35	5.8±0.15	11.2±0.3	7±0.25	14min	3.45±0.15	9.6min
PQ16.6/13.8/10	1	16.6±0.3	6.9±0.15	10±0.3	6.3±0.2	14.1±0.3	4.65±0.15	10.3±0.3
PQ17.4/22.6/14	1	17.4±0.35	11.3±0.2	14±0.3	8.8+0/-0.4	15min	8.4±0.15	9.7±0.5
PQ20/16.8/14	11	20±0.3	8.4±0.1	14±0.3	8.5±0.15	17.4±0.3	5.6+0.15/-0.1	
PQ20.5/20.2/14	1	20.5±0.4	10.2+0/-0.2	14±0.4	8.8±0.2	18±0.4	7+0.3/-0	12min
PQ20/10E	1	20.5±0.4	4.9±0.1	14.0±0.4	8.8±0.2	18.0±0.4	2.65±0.2	12.0min
PQ20/12	1	20.5±0.4	6±0.1	14.0±0.4	8.8±0.2	18.0±0.4	3.05±0.15	12.0min
PQ20/14	1	20.5±0.4	7.1±0.2	14.0±0.4	8.8±0.2	18±0.4	4.205±0.2	
PQ20/16	1	20.5±0.4	8+0.2/-0	14±0.4	8.8±0.2	18±0.4	5+0.3/-0	12min
PQ20/20	6	21.3±0.4	10.1±0.1	14.0±0.4	8.8±0.2	18.0±0.4	7.15±0.15	12.0min
PQ20/20C	1	20.5±0.4	10.2+0/-0.2	14±0.4	8.8±0.2	18±0.4	7+0.3/-0	12min
PQ20/25A	1	20.5±0.4	12.5±0.1	14±0.4	8.8±0.2	18±0.4	9.56±0.15	12min
PQ20.5/20.2/14I	1	20.5±0.4	10.25±0.15	14±0.4	8.8±0.2	18±0.4	7.3±0.15	13.8±0.5
PQ20.6/13.4/15	3	20.6±0.3	6.7±0.05	15.02±0.3	8.8±0.15	17.68±0.25	4.1±0.08	8.02±0.2
PQ20.9/16.2/14A	1	20.9±0.8	8.1±0.25	14±0.4	8.8±0.2	18±0.4	5.15±0.15	12min
PQ21/22.4/11.4	4	21+0.4/-0.5	11.2±0.2	11.4+0.2/-0.3	11.4+0.2/-0.3	17.4+0.45/-0.25	8.6±0.15	6+0.1/-0.2
PQ21.3/20/14	6	21.3±0.4	10±0.1	14.0±0.4	8.8±0.2	18.0±0.4	7.05±0.15	12.0min
PQ21.8/16/13.9	1	21.8±0.4	8±0.1	13.9±0.3	9.5±0.2	18.3±0.4	4.5±0.15	14.35±0.3
PQ21.9/16/14A	1	21.85±0.3	8±0.1	14±0.25	9.6±0.2	18.7±0.3	4.5±0.1	14.5±0.25
PQ22.8/17.3/14.4	1	22.8±0.4	8.65±0.1	14.4±0.4	8.8±0.2	20.3±0.4	5.7±0.15	15.6±0.4

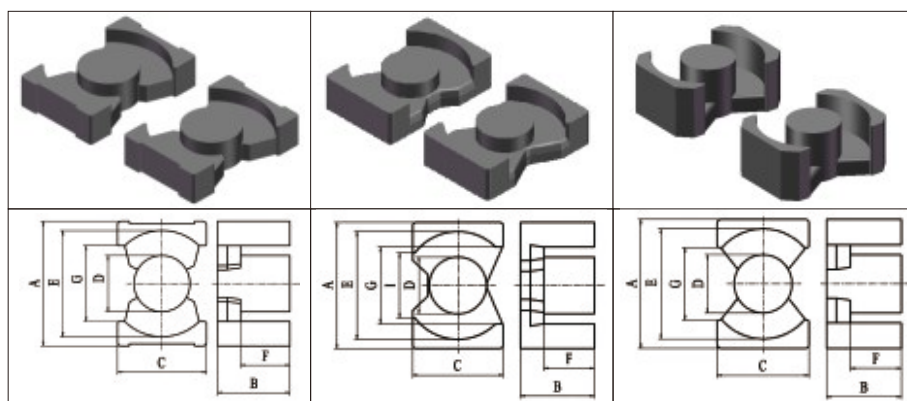


FIG.6

FIG.9

FIG.11

PQ 型 / PQ Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g /PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
PQ15.5/8/10	9	0.64	31.93	20.32	648.80	2590	3050	4.00
PQ16.4/11.6/11.2A	1	0.70	38.98	27.33	1065.30	2600	3000	5.53
PQ16.6/13.8/10	1	0.96	33.67	32.34	1089.00	1910	2330	6.00
PQ17.4/22.6/14	1	0.81	58.99	47.59	2807.00	2600	3300	14.57
PQ20/16.8/14	11	0.65	59.40	38.70	2298.80	3230	3990	12.20
PQ20.5/20.2/14	1	0.74	61.22	45.53	2787.30	2800	3500	14.46
PQ20/10E	1	0.48	54.44	26.14	1422.80	3100	3700	7.38
PQ20/12	1	0.48	60.87	29.14	1773.60	3800	4700	9.20
PQ20/14	1	0.56	60.64	33.66	2041.20	3400	4200	10.59
PQ20/16	1	0.61	61.09	37.53	2292.90	3200	4000	11.90
PQ20/20	6	0.70	64.81	45.51	2949.50	2900	3600	15.31
PQ20/20C	1	0.74	61.22	45.53	2787.30	2800	3500	14.46
PQ20/25A	1	0.9	61.45	55.02	3381.0	2550	3350	9.2
PQ20.5/20.2/14I	1	0.77	60.32	46.51	2805.50	2820	3520	14.84
PQ20.6/13.4/15	3	0.48	69.48	33.16	2304.20	3670	4480	11.54
PQ20.9/16.2/14A	1	0.6	62.94	37.6	2366.4	3500	4400	6.5
PQ21/22.4/11.4	4	0.83	61.00	50.90	3104.90	2720	3420	16.82
PQ21.3/20/14	6	0.7	64.79	45.11	2922.9	3200	3900	7.9
PQ21.8/16/13.9	1	0.50	72.69	36.58	2658.60	4000	4930	14.94
PQ21.9/16/14A	1	0.43	83.50	35.74	2984.40	4150	5100	14.96
PQ22.8/17.3/14.4	1	0.70	62.74	43.71	2742.34	2800	3500	14.23

*-Al为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of **MnZn** Ferrtie Material

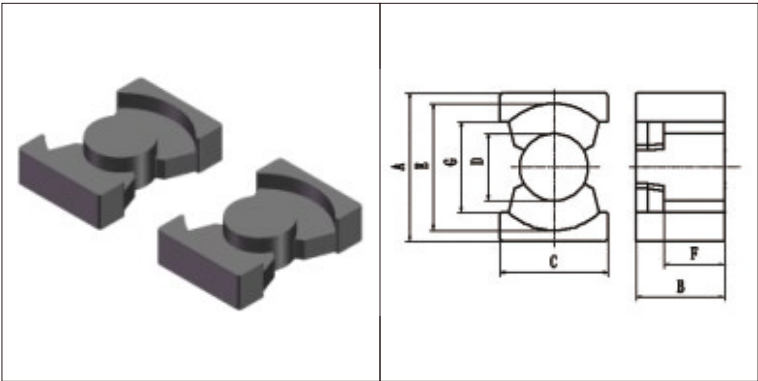


FIG.1

PQ 型 / PQ Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)						
		A	B	C	D	E	F	G
PQ26/15A	1	26.5±0.45	7.4±0.15	19±0.45	12±0.2	22.5±0.45	3.2min	15.5min
PQ26/16C	1	26.5±0.45	8+0/-0.2	19±0.45	12.2+0/-0.4	22.5±0.45	3.75±0.15	15.5min
PQ26/18	1	26.5±0.45	9+0/-0.25	19.0±0.45	12.2+0/-0.4	22.5±0.45	4.3+0.3/-0	15.5min
PQ26/19	1	26.5±0.45	9.7+0/-0.25	19.0±0.45	12.2+0/-0.4	22.5±0.45	5.1+0.5/-0	15.5min
PQ26/20A	1	26.6±0.5	9.95+0.25/-0	19.0±0.5	12.0±0.3	22.0min	5.75±0.15	15.2min
PQ26/20L	1	26.5±0.45	10.45±0.2	19.0±0.45	12.0±0.3	22.5±0.45	6.2±0.2	15.5min
PQ26/21A	1	26.6±0.5	10.45±0.2	19±0.5	12±0.3	22min	6.2±0.2	15.2min
PQ26/21B	1	26.5±0.45	10.35+0/-0.25	19.0±0.45	12.0±0.2	22.5±0.45	5.9±0.15	15.5min
PQ26/21I	1	26.5±0.45	10.65±0.15	19±0.45	12±0.2	22.5±0.45	6.3±0.2	15.5min
PQ26/22H	1	26.5±0.45	10.75+0.3/-0.1	19±0.45	12±0.2	22.5±0.45	6.7+0.2/-0.1	15.5min
PQ26/23B	1	26.5±0.45	11.25±0.2	19±0.45	12.0±0.2	22.05min	6.93±0.15	15.5min
PQ26/25M	1	26.5±0.45	12.5+0/-0.25	19±0.45	12±0.3	22.5±0.45	8.05±0.15	15.5min
PQ26.3/16.2/19	1	26.75+0/-0.9	8.1±0.2	19.45+0/-0.9	12.2+0/-0.4	22.05+0.9/-0	3.65±0.2	15.5min
PQ26.5/11/19A	1	26.5±0.45	5.4+0.2/-0	19±0.45	12±0.2	22min	2.65+0.3/-0	15.5min
PQ26.5/15.3/19	1	26.5±0.45	7.63±0.12	19±0.45	12±0.2	22.5±0.45	3.3±0.15	15.5+0.8/-0
PQ26.5/17.8/19	1	26.5±0.45	9+0/-0.25	19±0.45	12.2+0/-0.4	22min	4.3+0.3/-0	15.5min
PQ26.5/18.8/19A	1	26.5±0.4	9.4±0.13	19±0.4	12±0.2	22.5+0.4/-0.3	5.08±0.15	15.5min
PQ26.5/20.4/19A	1	26.5±0.45	10.2±0.15	19±0.45	12±0.2	22.5±0.45	5.85±0.15	15.5min
PQ26.5/25/19B	1	26.5±0.45	12.5±0.125	19±0.45	12±0.2	22.5±0.3	8.05±0.15	15.7min
PQ26.5/25/19E	1	26.5±0.45	12.45±0.1	19±0.45	12±0.2	22.5±0.45	8.15+0.2/-0.1	16.2min
PQ27/20F	6	26.5+1.2/-0.5	10.05±0.15	19±0.5	12±0.2	22.5±0.45	6.25±0.15	15.4min

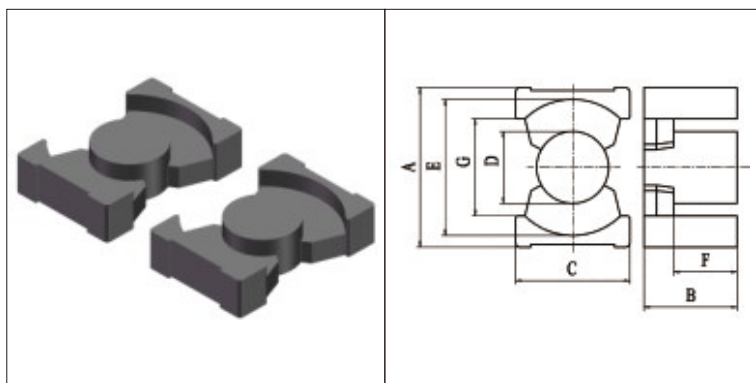


FIG.6

PQ 型 / PQ Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g /PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
PQ26/15A	1	0.30	116.00	35.00	4070.00	6400	7900	21.12
PQ26/16C	1	0.31	117.91	36.62	4317.30	6300	7800	22.40
PQ26/18	1	0.33	120.57	39.84	4804.00	6000	7400	24.93
PQ26/19	1	0.36	118.86	43.11	5124.40	5600	7000	26.59
PQ26/20A	1	0.37	120.51	44.80	5398.20	5500	6900	28.01
PQ26/20L	1	0.39	119.13	46.54	5544.10	5300	6700	28.77
PQ26/21A	1	0.39	119.94	46.47	5573.00	5400	6700	28.92
PQ26/21B	1	0.38	119.71	45.46	5442.30	5400	6800	28.24
PQ26/21I	1	0.39	119.91	47.01	5647.30	5300	6600	29.31
PQ26/22H	1	0.41	118.01	48.48	5720.80	5200	6500	29.69
PQ26/23B	1	0.41	119.70	49.56	5932.20	5100	6400	30.79
PQ26/25M	1	0.45	119.75	54.03	6469.90	4800	6000	33.58
PQ26.3/16.2/19	1	0.31	118.95	37.98	4517.1	6200	8000	11.5
PQ26.5/11/19A	1	0.30	97.74	29.74	2907.00	4800	5800	15.09
PQ26.5/15.3/19	1	0.29	119.74	35.10	4202.80	6500	8000	21.81
PQ26.5/17.8/19	1	0.33	120.88	39.83	4814.00	6000	7400	24.98
PQ26.5/18.8/19A	1	0.34	119.00	46.30	5490.00	5400	6700	28.49
PQ26.5/20.4/19A	1	0.38	119.91	45.30	5432.40	5400	6800	28.19
PQ26.5/25/19B	1	0.45	120.37	54.29	6534.90	4700	6000	33.91
PQ26.5/25/19E	1	0.46	119.33	54.47	6500.00	4700	6000	33.73
PQ27/20F	6	0.40	115.50	45.89	5300.30	5000	6200	27.51

*-AL为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of **MnZn** Ferrtie Material

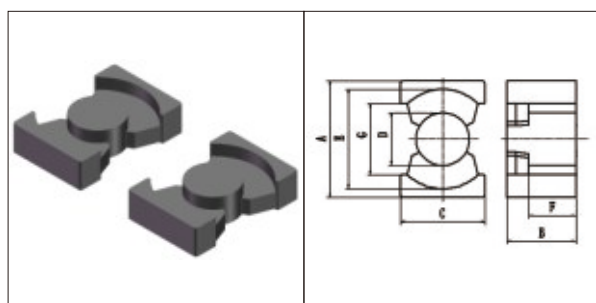


FIG.1

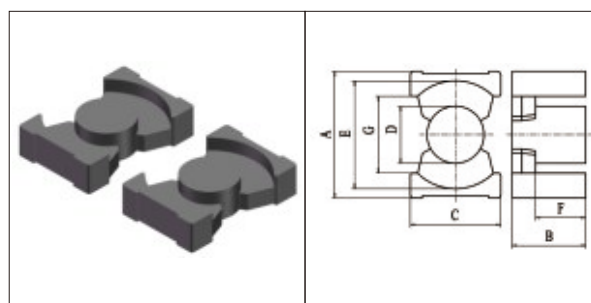


FIG.6

PQ 型 / PQ Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)						
		A	B	C	D	E	F	G
PQ26/14B	1	26.95+0/-0.9	7+0/-0.2	19.45+0/-0.9	12.2+0/-0.4	22.05min	2.5±0.15	15.5min
PQ26/16A	1	26.95+0/-0.9	8.0±0.2	19.45+0/-0.9	12.2+0/-0.4	22.05min	3.5±0.1	15.5min
PQ26.5/16/19E	1	26.5±0.45	8±0.1	19±0.45	12.7±0.2	22.05min	3.85±0.15	15.5min
PQ26.5/20.2/19I	1	26.5±0.5	10.1±0.15	19±0.4	12±0.2	22.5±0.4	5.75±0.15	
PQ26.8/24.8/19	1	26.8±0.45	12.5+0/-0.25	19±0.45	12±0.3	22.8±0.45	8.05±0.2	16min
PQ26.9/24.8/19	6	26.885±0.82	12.37±0.125	19±0.46	12±0.19	22.05min	8.05±0.15	15.49min
PQ27/20.8/19	1	27±0.45	10.4±0.3	19±0.5	12±0.3	22.5min	6.2±0.2	16.2min
PQ27/20	6	27.3±0.46	10.1±0.125	19.0±0.45	12.0±0.2	22.5±0.46	5.75±0.15	15.5min
PQ27/20C	6	27.3±0.46	10.1±0.12	19±0.45	12±0.2	22.5±0.46	5.9min	15.5min
PQ27/25A	6	27.3±0.46	12.35±0.125	19.0±0.45	12.0±0.2	22.5±0.46	8.05±0.15	15.5min
PQ27/25E	1	27±0.45	12.5±0.3	19±0.5	12±0.3	22.5min	8.25±0.2	16.2min
PQ27.3/24.7/19	6	27.3±0.46	12.35±0.125	19±0.45	12±0.2	22.5±0.45	8.05±0.15	15.5min
PQ29.8/35/29A	10	29.8±0.5	17.5±0.1	29±0.4	13.8±0.2	24.7±0.4	12.55±0.15	16+0.5/-0.3
PQ30/20B	1	30.0±0.5	9.9±0.1	20.5±0.4	13.3+0.2/-0.3	25.25±0.5	6.8±0.2	18min
PQ30/25/20.5	1	30±0.5	12.5±0.2	20.5±0.5	13.3±0.25	25min	9.2±0.2	18min
PQ30/26/20.5B	1	30±0.5	13±0.1	20.5±0.35	13.3±0.3	25.5±0.5	9.7±0.15	17.8min
PQ30.5/36.1/29A	10	30.5±0.5	18.05±0.15	29±0.4	13.8±0.2	24.7±0.4	12.55±0.15	16+0.5/-0.3
PQ32/11B	1	32±0.5	5.6±0.15	22±0.5	13.45±0.25	27.5±0.5	2.6±0.15	19min
PQ32/14B	1	32.0±0.5	7.1±0.2	22.0±0.5	13.4±0.3	27.5±0.5	2.7±0.2	19min
PQ32/16	1	32.0±0.5	8.05+0/-0.18	22.0±0.5	13.45±0.25	27.5±0.5	3.4+0.3/-0	19.0min
PQ32/17.9/22	1	32±0.5	8.95±0.15	22±0.5	13.45±0.25	27.5±0.5	4.75±0.15	19min

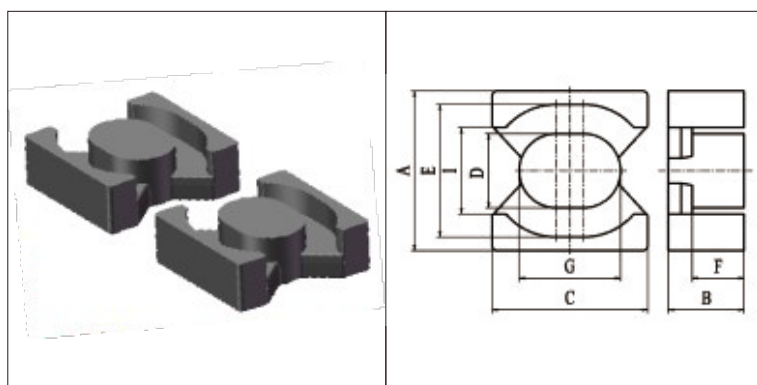


FIG.10

PQ 型 / PQ Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g /PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
PQ26/14B	1	0.27	120.45	32.04	3859.20	6900	8500	20.03
PQ26/16A	1	0.30	121.37	36.18	4390.70	6400	7900	22.79
PQ26.5/16/19E	1	0.30	124.27	36.71	4562.10	6640	8170	26.00
PQ26.5/20.2/19I	1	0.38	97.51	45.79	4465.10	3660	4570	30.20
PQ26.8/24.8/19	1	0.46	119.44	54.42	6500.00	4700	6000	33.73
PQ26.9/24.8/19	6	0.44	121.94	54.00	6585.20	4700	6000	34.17
PQ27/20.8/19	1	0.40	118.55	47.02	5574.10	5300	6600	28.93
PQ27/20	6	0.36	124.08	44.94	5575.70	5500	6800	28.94
PQ27/20C	6	0.37	121.92	45.51	5548.50	5400	6800	28.79
PQ27/25A	6	0.44	123.86	53.92	6678.90	4800	6000	34.66
PQ27/25E	1	0.46	119.07	55.27	6580.90	4700	5900	34.15
PQ27.3/24.7/19	6	0.44	123.87	53.92	6679.10	4800	6000	34.66
PQ29.8/35/29A	10	0.32	241.35	77.46	18695.20	7030	9060	91.18
PQ30/20B	1	0.38	125.59	48.26	6061.50	4300	5400	31.46
PQ30/25/20.5	1	0.45	130.17	58.54	7619.60	3900	5000	39.54
PQ30/26/20.5B	1	0.48	134.80	64.26	8662.96	3800	4900	44.96
PQ30.5/36.1/29A	10	0.31	252.96	77.92	19710.10	7000	9020	98.66
PQ32/11B	1	0.28	132.37	36.49	4830.30	5200	6500	25.07
PQ32/14B	1	0.25	160.17	40.40	6470.90	7200	8900	33.58
PQ32/16	1	0.27	161.45	44.11	7121.40	6800	8400	36.96
PQ32/17.9/22	1	0.31	159.09	48.91	7780.50	6000	7500	40.38

*-AL为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of **MnZn** Ferrtie Material

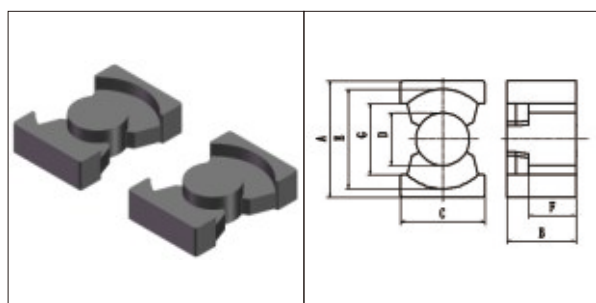


FIG.1

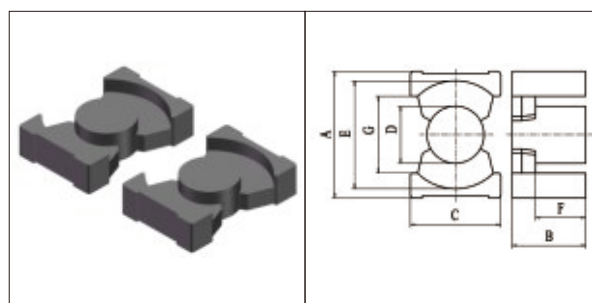


FIG.6

PQ 型 / PQ Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)						
		A	B	C	D	E	F	G
PQ32/18F	1	32±0.5	9.1+0/-0.25	22±0.5	13.7+0/-0.5	27.5±0.5	4.6+0.4/-0	19.0min
PQ32/20.1/22	1	32±0.5	10.05±0.15	22±0.5	13.4±0.3	27.5±0.5	6.5±0.2	19min
PQ32/20M	1	32.0±0.5	10.25±0.15	22.0±0.5	13.4±0.3	27.5±0.5	5.75±0.15	19.0min
PQ32/21.4/21.8	1	32±0.5	10.7±0.125	21.75±0.5	13.45±0.25	27.5±0.5	6.15±0.15	20.5min
PQ32/21A	1	32.0±0.5	10.5±0.2	22.0±0.5	13.4±0.3	27.5±0.5	6±0.2	19min
PQ32/21F	1	32.0±0.5	10.45±0.15	22.0±0.5	13.1±0.3	27.5±0.5	5.9±0.15	19.75min
PQ32/25D	1	32.0±0.5	12.35±0.2	22.0±0.5	13.4±0.3	27.5±0.5	8.1±0.2	19min
PQ32/25G	1	32.0±0.5	12.35±0.15	22.0±0.5	13.45±0.25	27.5±0.5	8.25±0.15	19.75min
PQ32/30	1	32.0±0.5	15.3+0/-0.3	22.0±0.5	13.45±0.25	27.5±0.5	10.5+0.3/-0	19.0min
PQ32/30.3/22AC	1	32±0.6	15.15±0.15	22±0.4	13.4±0.3	27.5±0.5	10.65±0.15	23min
PQ32/30.7/22	1	32.0±0.5	15.35±0.15	22.0±0.5	13.4±0.3	27.5±0.5	10.85±0.15	20min
PQ32/35.5/22B	1	32+0.7/-0.3	17.75±0.2	22±0.5	13.4±0.3	27.5±0.5	13.25±0.2	19.5min
PQ32/35A	1	32+0.7/-0.5	17.75±0.125	22.0±0.5	13.45±0.25	27.5±0.5	13.25±0.15	19min
PQ32/30.4/22M	11	32±0.5	15.18±0.15	22±0.5	13.45±0.25	27.5±0.5	10.65±0.15	19min
PQ32/40/22	1	32±0.6	20±0.15	22±0.4	13.45±0.2	27.5±0.5	15.5±0.15	19min
PQ32/18C	1	32.5+0/-1	9.55+0.3/-0	22.5+0/-1	13.4±0.3	27+1/-0	5.1+0.3/-0	19.0min
PQ32/20.5/22G	1	32.5+0/-1.0	10.25±0.2	22.5+0/-1.0	13.4±0.3	27.0+1.0/-0	5.75±0.2	19.5min
PQ32/30G	1	32.5+0/-1	15.15±0.2	22.5+0/-1	13.4±0.3	27+1/-0	10.65±0.2	19min
PQ32.2/31/22	1	32.2±0.5	15.5±0.2	22.0±0.5	13.45±0.25	27.5±0.5	10.9±0.2	19.3min
PQ32.5/25.3/22	1	32.5±0.5	12.65±0.2	22±0.4	13.4±0.3	27.5±0.5	8.4±0.2	19min
PQ32.5/30.2/22	6	32.5±1	15.1±0.2	22±0.5	13.45±0.25	27min	10.7±0.2	19min

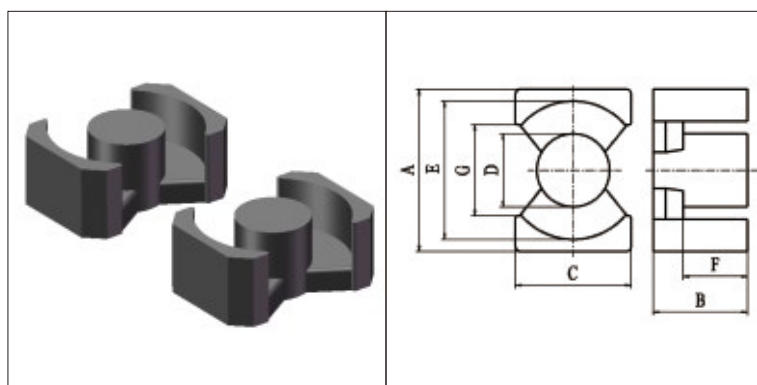


FIG.11

PQ 型 / PQ Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g /PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
PQ32/18F	1	0.31	158.83	49.08	7795.40	5900	7400	40.45
PQ32/20.1/22	1	0.35	150.60	54.87	8263.40	5500	7000	42.88
PQ32/20M	1	0.33	163.13	53.90	8792.70	5900	7500	45.63
PQ32/21.4/21.8	1	0.35	161.80	56.33	9113.50	5800	7300	47.29
PQ32/21A	1	0.34	163.22	54.99	8975.60	5800	7400	46.58
PQ32/21F	1	0.34	159.42	54.97	8763.60	5600	7100	45.48
PQ32/25D	1	0.40	161.00	63.63	10243.50	4900	6300	53.16
PQ32/25G	1	0.40	158.97	64.20	10205.90	4700	6000	52.96
PQ32/30	1	0.46	164.97	75.29	12420.10	4500	5900	64.45
PQ32/30.3/22AC	1	0.49	158.45	77.09	12214.1	4680	6300	27.0
PQ32/30.7/22	1	0.47	163.24	76.54	12494.70	4500	5800	64.84
PQ32/35.5/22B	1	0.53	152.70	81.61	12461.45	4000	5200	64.67
PQ32/35A	1	0.52	165.98	86.65	14381.50	4000	5300	74.63
PQ32/30.4/22M	11	0.46	161.00	74.60	12010.60	5310	6830	55.42
PQ32/40/22	1	0.58	166.11	96.28	15993.60	3740	4880	42.35
PQ32/18C	1	0.32	162.30	51.62	8377.60	6100	7600	43.48
PQ32/20.5/22G	1	0.33	162.63	54.07	8793.60	5900	7500	45.63
PQ32/30G	1	0.46	164.32	75.29	12371.20	4500	5900	64.20
PQ32.2/31/22	1	0.46	166.98	76.65	12798.20	4500	5900	66.42
PQ32.5/25.3/22	1	0.40	164.12	64.85	10643.20	4900	6200	55.23
PQ32.5/30.2/22	6	0.45	167.31	75.12	12568.00	4500	5800	65.22

*-AL为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of **MnZn** Ferrtie Material

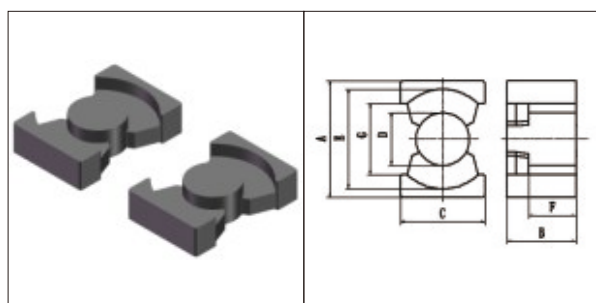


FIG.1

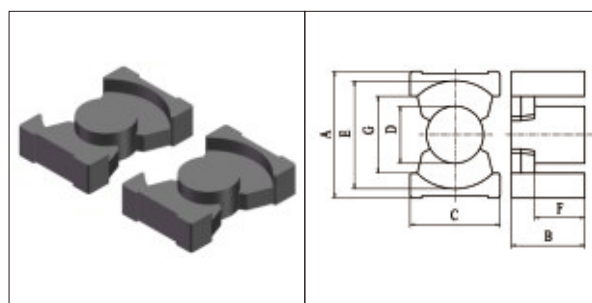


FIG.6

PQ 型 / PQ Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)						
		A	B	C	D	E	F	G
PQ32.5/30.7/22	1	32.5±0.5	15.35±0.2	22±0.5	13.4±0.3	28±0.5	10.85±0.15	20.5min
PQ33/21	6	33.0±0.5	10.3±0.125	22.0±0.5	13.5±0.25	27.5±0.5	5.75±0.15	19min
PQ33/30C	6	33±0.5	15.15±0.125	22±0.5	13.5±0.25	27.5±0.5	10.65±0.15	19min
PQ33.5/20.6/22	6	33.5±0.5	10.3±0.125	22±0.5	13.5±0.25	28.3min	5.75±0.2	19.7min
PQ33.5/33.5/24	1	33.8+0.2/-0.8	16.75±0.1	24±0.5	14.3±0.25	28.6±0.5	12.35±0.15	20.3min
PQ34/30/24	1	34±0.5	15±0.125	24±0.5	17±0.3	29±0.45	10.15±0.15	21±0.45
PQ34/30/28.6	1	34±0.5	15±0.125	28.6±0.45	18±0.3	30±0.45	10.15±0.15	21±0.45
PQ35/35D	1	35.1±0.6	17.4±0.2	26.0±0.5	14.35±0.25	32.0±0.5	12.5±0.2	23.5MIN
PQ35/35J	1	35.05±0.55	17.25+0.25/-0	26±0.5	14.35±0.25	31.5min	12.25min	23.5min
PQ35.1/30.6/26	1	35.1±0.6	15.3±0.2	26.0±0.5	14.35±0.25	32.0±0.5	10.4±0.2	23.5min
PQ35.1/31/26C	1	35.1±0.6	15.5±0.15	26±0.5	14.6+0/-0.5	31.5min	10.75±0.15	23.5min
PQ35/16/26	1	35.1±0.6	8±0.15	26±0.5	14.35±0.25	32±0.5	4±0.15	23.5min
PQ35/25C	1	35.1±0.6	12.5±0.15	26.0±0.5	14.4±0.25	32.0±0.5	7.6±0.2	23.5min
PQ35/26	1	35.1±0.6	13±0.2	26.0±0.5	14.35±0.25	32.0±0.5	8.1±0.2	23.5MIN
PQ35/27D	1	35.1±0.6	13.5±0.2	26±0.5	14.35±0.25	32±0.5	8.5±0.2	23.5min
PQ35/30	1	35.1±0.6	14.9±0.2	26.0±0.5	14.35±0.25	32.0±0.5	10.0±0.2	23.5min
PQ35/33	1	35.1±0.6	16.5+0/-0.25	26.0±0.5	14.35±0.25	32.0±0.5	11.5±0.2	23.5min
PQ35/40	1	35.1±0.7	19.85±0.15	26.0±0.5	14.35±0.25	32.0±0.5	15±0.2	23.5MIN
PQ35.1/30/26A	1	35+0.7/-0.5	15±0.2	26±0.4	14.6+0/-0.5	32±0.5	9.8±0.15	23.5min
PQ36/22.2/26A	8	36±0.6	11.1±0.15	26±0.5	18±0.4	29.5min	6.9±0.15	18.57min
PQ36/35/26	1	36±0.55	17.4±0.1	26±0.5	14.5+0/-0.4	33±0.5	12.5±0.1	24.3min

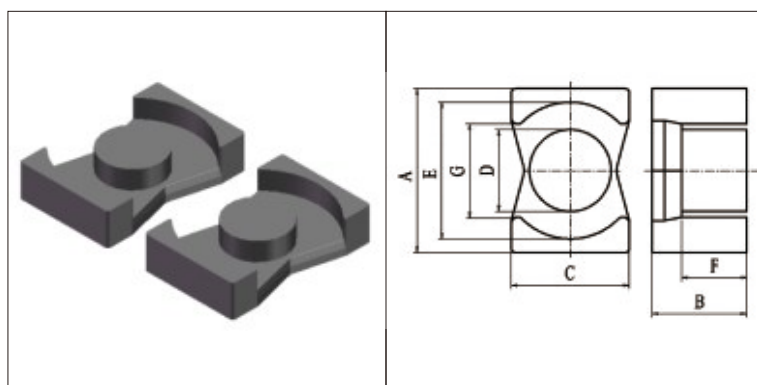


FIG.8

PQ 型 / PQ Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g /PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
PQ32.5/30.7/22	1	0.47	162.94	77.13	12568.20	4500	5800	56.74
PQ33/21	6	0.32	170.78	53.95	9213.90	6100	7700	47.82
PQ33/30C	6	0.44	169.00	76.00	12732.00	4600	5900	66.07
PQ33.5/20.6/22	6	0.33	165.80	55.33	9173.70	5900	7500	47.61
PQ33.5/33.5/24	1	0.45	185.73	82.86	15389.00	4400	5700	79.86
PQ34/30/24	1	0.33	225.30	73.43	16543.10	6030	7750	74.40
PQ34/30/28.6	1	0.28	256.37	72.85	18676.00	6560	8420	83.52
PQ35/35D	1	0.48	182.96	88.17	16130.70	4600	6000	83.71
PQ35/35J	1	0.48	183.00	87.79	16065.60	4600	6000	83.37
PQ35.1/30.6/26	1	0.43	182.93	78.93	14439.40	5000	6500	74.93
PQ35.1/31/26C	1	0.44	180.48	80.26	14485.30	4900	6400	75.17
PQ35/16/26	1	0.29	166.34	48.95	8141.50	6200	7700	42.25
PQ35/25C	1	0.36	183.46	66.60	12219.20	5800	7500	63.41
PQ35/26	1	0.38	182.89	68.83	12587.60	5600	7200	65.32
PQ35/27D	1	0.38	184.21	70.72	13027.00	5500	7100	67.60
PQ35/30	1	0.42	182.93	77.18	14118.00	5100	6600	73.27
PQ35/33	1	0.46	182.70	83.73	15296.70	4800	6200	79.38
PQ35/40	1	0.54	182.8	99.0	18086.7	4300	6380	46.5
PQ35.1/30/26A	1	0.41	186.01	76.79	14283.50	5200	6700	74.12
PQ36/22.2/26A	8	0.22	259.83	56.71	14734.17	10000	12000	76.46
PQ36/35/26	1	0.49	181.12	89.23	16160.80	4500	5900	83.87

*-AL为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of **MnZn** Ferrtie Material

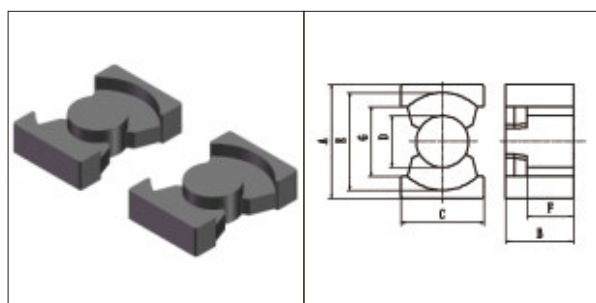


FIG.1

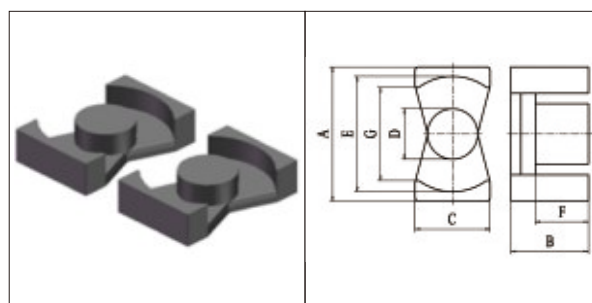


FIG.2

PQ 型 / PQ Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)						
		A	B	C	D	E	F	G
PQ38/11B	2	38±0.65	5.7±0.15	21.32±0.4	14.3±0.25	32.8±0.65	2.7±0.15	25.84min
PQ38/13I	2	38±0.65	6.5±0.15	21.32±0.4	14.3±0.25	32.8±0.65	3.5±0.2	25.84min
PQ38/14.2/21.3A	2	38±0.65	7.1±0.15	21.32±0.4	14.3±0.25	32.8±0.65	4.1±0.15	25.84min
PQ38/16/21.3B	2	38±0.65	8±0.15	21.32±0.4	14.3±0.25	32.8±0.65	4.6±0.2/-0.1	26.5±0.65
PQ39/20/20A	7	38.7±0.6	9.75±0.2	19.6±0.4	14.8±0.3	31.7±0.7/-0.5	5.35±0.2	26±0.8/-0.4
PQ39.5/20.3/32.5B	5	39.5±0.6	10.15±0.15	32.5±0.6	19±0.35	36±0.65	6.65±0.25	22.3min
PQ40.5/30.9/27.9	1	40±1.4/-0.4	15.43±0.12	28±0.45/-0.6	15±0/-0.6	36.4min	10.28±0.15	27.2min
PQ40/13.5/21	2	40±0.5	6.75±0.2	21±0.25	14.2±0.2	32.6min	3.7±0.2	26.4min
PQ40/25	1	40.0±1.4/-0.4	12.5±0.15	28±0.45/-0.6	15.0±0/-0.6	36.4min	7.25±0.2	27.2min
PQ40/30	1	40.0±1.4/-0.4	15.13±0.12	28.0±0.45/-0.6	15.0±0/-0.6	36.4min	9.98±0.15	27.2min
PQ40/40A	1	40.0±1.4/-0.4	20.0±0/-0.25	28.0±0.45/-0.6	15.0±0/-0.6	36.4min	14.6±0.3/-0	27.2min
PQ40/7	2	40±0.5	6.5±0.2	21±0.25	14.2±0.2	32.6min	3.45±0.2	26.4min
PQ40/48/28	1	40±1.4/-0.4	24±0.15	28.0±0.45/-0.6	15.0±0/-0.6	36.4min	18.75±0.25	27.2min
PQ40.5/23.6/28	1	40.5±0.8	11.8±0.1/-0.15	28±0.6	15±0/-0.6	37±0.8	6.65±0.15	27.2min
PQ40.5/30.3/28A	1	40.5±0.9	15.15±0.1	28±0.6	14.9±0.3	37±0.6	10±0.15	27.8min
PQ40.5/30/28A	1	40.5±0.7	15±0.2	27.8±0.4	14.9±0.3	37±0.6	9.85±0.2	28min
PQ40.5/35/28	1	40.5±0.7	17.5±0.2	28±0.45/-0.6	14.8±0.3	37±0.6	12.35±0.2	27.2min
PQ44.5/43/30A	1	44.5±0.9	21.5±0.15	30±0.6	18±0.3	38±0.7	14.75±0.2	29±0.9
PQ50/50B	1	50±0.7	25±0.15	32±0.6	20±0.35	44±0.7	18.1±0.25	32min
PQ50/50/34B	1	50±0.6	25±0.2	34±0.5	21±0.3	44±0.6	18±0.25	32±0.6
PQ54.2/52/35	1	54.2±0.75	26±0.2	35±0.5	20.5±0.4	48±0.75	19±0.3	37.7±0.75

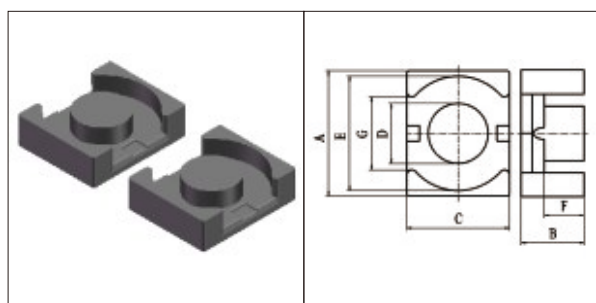


FIG.5

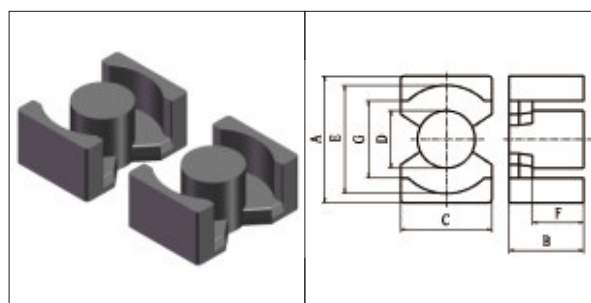


FIG.7

PQ 型 / PQ Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g /PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
PQ38/11B	2	0.33	130.60	43.00	5601.00	4800	6000	29.07
PQ38/13I	2	0.34	133.40	46.02	6138.90	4600	5800	31.86
PQ38/14.2/21.3A	2	0.36	134.12	48.62	6520.20	4400	5600	33.84
PQ38/16/21.3B	2	0.36	144.82	52.34	7580.00	4700	5900	39.34
PQ39/20/20A	7	0.33	176.08	57.74	10167.10	5700	7300	52.76
PQ39.5/20.3/32.5B	5	0.19	278.79	52.63	14673.00	9800	12400	76.15
PQ40.5/30.9/27.9	1	0.42	198.53	83.99	16675.10	5000	6500	86.54
PQ40/13.5/21	2	0.35	137.73	47.59	6554.00	4600	5800	34.01
PQ40/25	1	0.35	200.15	70.87	14184.80	5800	7400	73.61
PQ40/30	1	0.42	198.53	82.68	16414.50	5100	6600	85.18
PQ40/40A	1	0.52	198.03	103.55	20505.60	4200	5500	106.41
PQ40/7	2	0.34	137.09	46.58	6385.50	4700	5800	33.14
PQ40/48/28	1	0.59	204.2	121.07	24726.3	4000	6000	63.5
PQ40.5/23.6/28	1	0.33	206.14	67.47	13908.10	6300	8000	72.18
PQ40.5/30.3/28A	1	0.41	203.38	82.65	16809.40	5200	6800	87.23
PQ40.5/30/28A	1	0.41	188.10	77.02	14487.08	5500	7100	75.18
PQ40.5/35/28	1	0.46	202.70	92.66	18783.00	4700	6100	97.47
PQ44.5/43/30A	1	0.34	308.17	106.02	32672.2	7400	9300	75.6
PQ50/50B	1	0.36	318.84	114.87	36624.2	6600	8600	101.8
PQ50/50/34B	1	0.32	350.13	113.69	39807.7	7200	9000	105.0
PQ54.2/52/35	1	0.35	344.6	122.3	42144.6	7100	9200	123.0

*-Al为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of **MnZn** Ferrtie Material

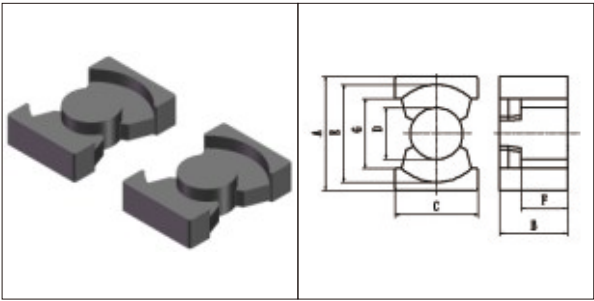


FIG.1

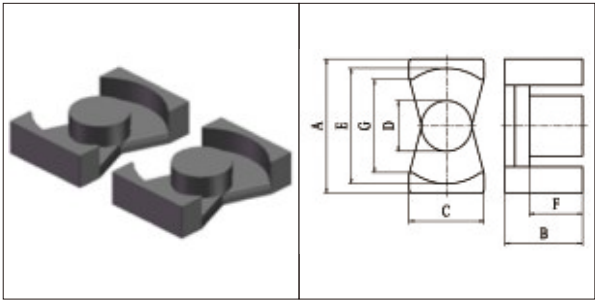


FIG.2

PQ 型 / PQ Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)						
		A	B	C	D	E	F	G
PQ59.5/40/42	1	59.5±0.65	20±0.3	42±0.6	25.8±0.4	51.4±0.65	13.65±0.3	37±0.65
PQ60/50/38.4D	2	60±0.9	25±0.2	38.4±0.7	24±0.4	52.8±0.9	18.05±0.25	38.96±0.9
PQ61/52/35	11	61+1.2/-0.9	26±0.3	35±0.8	25±0.6	53+1.2/-0.9	18±0.3	42±1
PQ65/60/40D	1	65±1.2	30±0.45	40±0.8	26+0.45/-0.6	52min	21±0.5	39.2min
PQ67.6/43.4/43.8	11	67.6±1.2	21.7±0.25	44±0.8	22±0.4	59±1.2	12.92±0.3	42.43±1.2
PQ68.5/43.7/44	11	68.5±1.2	21.85±0.25	44±0.8	22±0.4	59±1.2	13.07±0.3	42.01±1.2
PQ70/70/40C	11	70±1.4	35±0.3	40±0.8	30±0.6	58.6min	27±0.3	46.8min
PQ72/56/53B	7	72±1.1	28±0.4	53±0.8	31±0.45	65+1.1/-0.7	21±0.4	21±0.4
PQ107/88.8/70	1	107±2	44.4±0.6	70±1.5	41±1.5	93.7min	28.9±0.5	72.5min

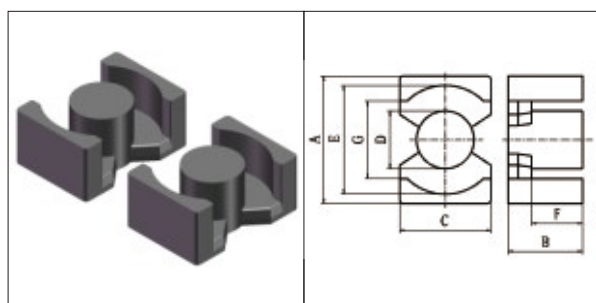


FIG.7

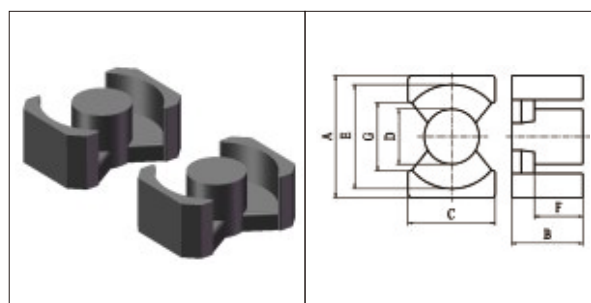


FIG.11

PQ 型 / PQ Core

型号 TYPE	图例 FIG.	参数 Parameters				AL(Ref)*		重量(Ref) g /PRS
		C1	Ae	Le	Ve	TP4A	TPW33	
PQ59.5/40/42	1	0.20	486.76	97.96	47683.0	11000	15000	137.0
PQ60/50/38.4D	2	0.27	438.91	120.12	52720.1	8200	10600	148.5
PQ61/52/35	11	0.28	446.32	122.97	54884.0	8000	10500	150.0
PQ65/60/40D	1	0.21	577.64	123.67	71436.7	9200	12000	219.0
PQ67.6/43.4/43.8	11	0.23	468.8	106.36	49862.0	8000	11800	161.5
PQ68.5/43.7/44	11	0.22	474.9	106.1	50386.9	9700	12800	170.0
PQ70/70/40C	11	0.26	620.59	162.24	100682.0	8800	12000	260.0
PQ72/56/53B	7	0.21	660.38	136.61	90212.5	11000	15300	272.0
PQ107/88.8/70	1	0.14	1430.0	207.0	296010.0	1200	17000	718.0

*-AL为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。